
DINIERING ENGINEERING



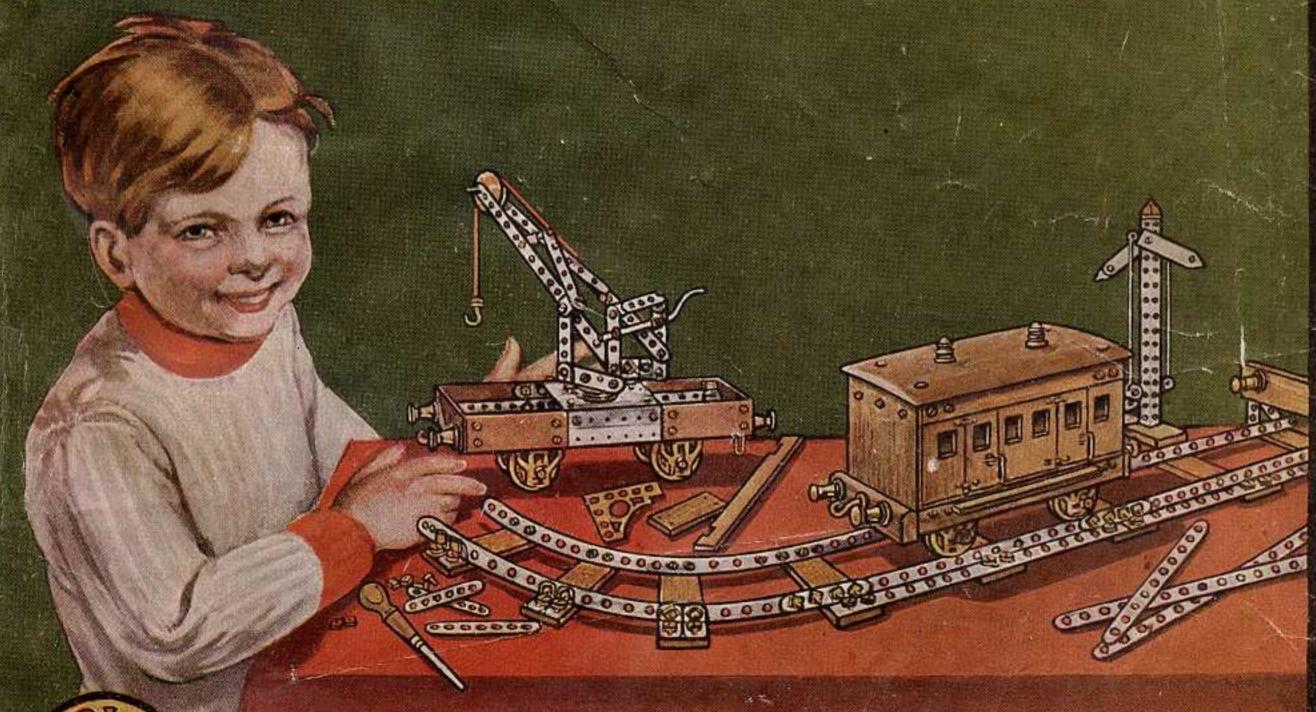


"Look-it's Wood and Metal!"

W. BUTCHER & SONS, LTD. CAMERA HOUSE, LONDON, E.C.

Primus Engineering

- IS A TOY. A PRIMUS Outfit will amuse and interest children from the age of six.
- IS ENTERTAINING. Young people will work at it for hours and not be tired, so also will grown-ups.
- IS A REAL HOBBY. Once interest a boy in PRIMUS, it fascinates and holds him and becomes his first spare-time thought.
- IS INSTRUCTIVE. An Outfit teaches a boy, from his earliest years, to make things.
- IS EDUCATIVE. Simple and scientific engineering models can be made; encourage inventiveness—the stepping-stone to constructional engineering.
- IS LIMITLESS. One model made brings thoughts for more—there is no end to its possibilities.

THE PRIMUS SPANNER.

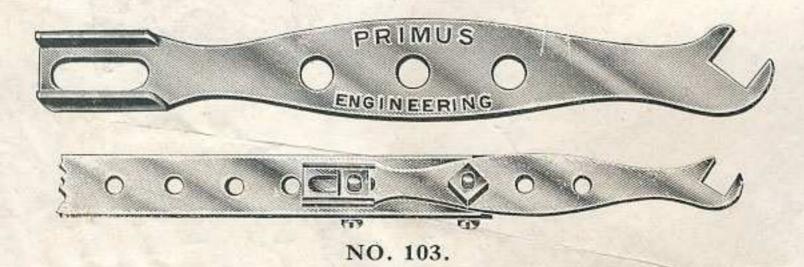

This new spanner, which is now included in all outfits, will be found a most useful addition. One end has a plain nut grip, the other is turned up to form a channel, in which a nut can be placed and securely held while the screw is turned home; this will be found of great service in reaching positions difficult of access. In case of need it can be lengthened by bolting on one of the strips by means of the centre holes.

BRITISH TOY FOR THE BRITISH BOY.

PRELIMINARY NOTE.

IN making up the models in this book many ideas will suggest themselves, even useful little things that you have around you may be brought into co-operation. In some cases cardboard may be usefully employed to add a finish to models, such as the covers for vans, carts, etc.; it must also be remembered that the metal plates and strips can be bent to various shapes, and can even be cut to make new parts. After some of the models shown have been mastered the inventive mind will feel an inclination to vary them, and this will suggest original models.

GENERAL INSTRUCTIONS.

ALWAYS COLLECT TOGETHER ALL THE PARTS REQUIRED FOR MAKING UP THE MODEL DECIDED UPON BEFORE BEGINNING.


BRACKETS.

It is important to understand why one side has a round hole and the other side This is to allow for the thickness of the wood or metal parts that are joined on, as in some cases more than one piece is joined together and the slot permits of the No. 66. necessary play.

WASHERS.

These play a very important part in mechanics. They are put on the axles between the wheels and trunnions, or between the collars and any facing part, to avoid friction

No. 84.

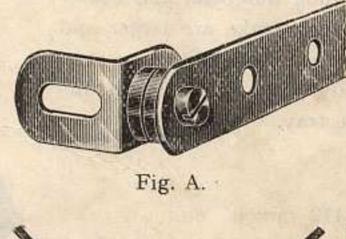

They are also used in many models to adjust

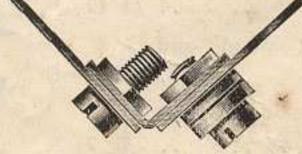


Fig. B.


the screws; example, for when it desired to fix a bracket exactly at right angles one of the screws must be shortened by means of washers, so that it will not

the length of

jam on the other (Fig. A). They are likewise used to adjust the bracket to the width of some of the other fittings (Fig. B).

WOOD BASES.

Some of the models are shown screwed down to wooden base boards. These are not included in the outfits, as they are most likely readily available and the size varies to suit the situation.

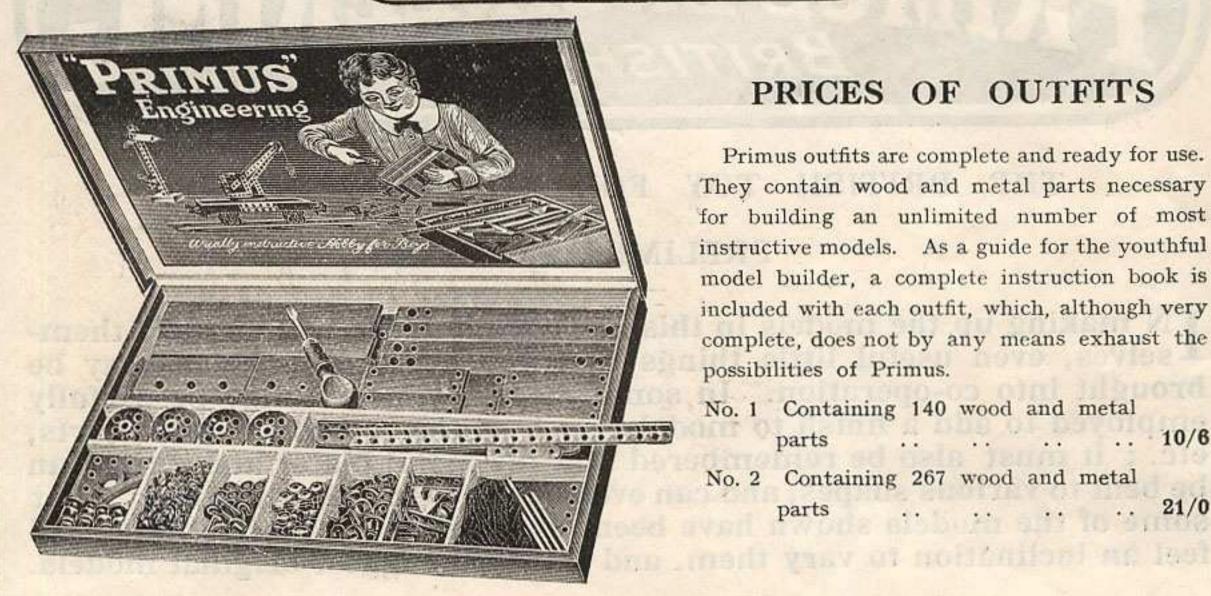

PRICES OF OUTFITS


Primus outfits are complete and ready for use. They contain wood and metal parts necessary for building an unlimited number of most instructive models. As a guide for the youthful model builder, a complete instruction book is included with each outfit, which, although very complete, does not by any means exhaust the possibilities of Primus.

No. 1	Containing	140	wood	and	metal	(proper
	parts					10/6
No. 2	Containing	267	wood	and	metal	Tool.
3 2 2 3 3 3 4	parts					21/0

These outfits contain a wider selection of parts than the preceding numbers, and consequently the models they make are larger and more imposing, and their possibilities greater. The boxes are handy and strong, with the metal parts in a loose tray.

No. 3	Containing	473	wood	and				
	metal parts				£1	17	6	4
No. 4	Containing	649	wood	and				1
	metal parts				2	17	6	
No. 5	Containing	1,131	wood	and				
	metal parts			***	4	7	6	

AT.

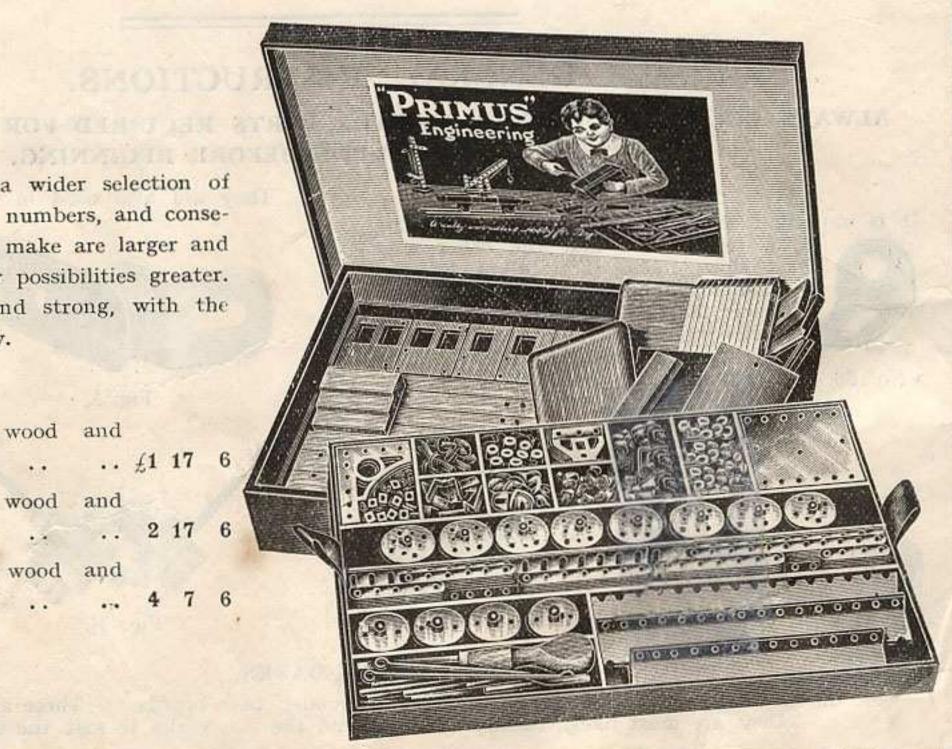

THE PRIMUS
CABINET OUTFIT No. 6


The most practical method of storing and handling Primus Parts.

An outfit de Luxe, suitable for presentation, etc., containing the same number of parts as the No. 5 outfit, with the addition of a useful set of gear wheels, pinions, etc.

The whole is contained in a handsome and very substantial cabinet, being made of polished oak, with three drawers, partitioned off to provide compartments for the various parts, with lock and key to secure the drawers when not in use.

No. 6—Containing 1,189 £ s. d. wood and metal parts in strong oak 3-drawer cabinet .. 8 8 0

Cabinet supplied separately ... 4 4 0

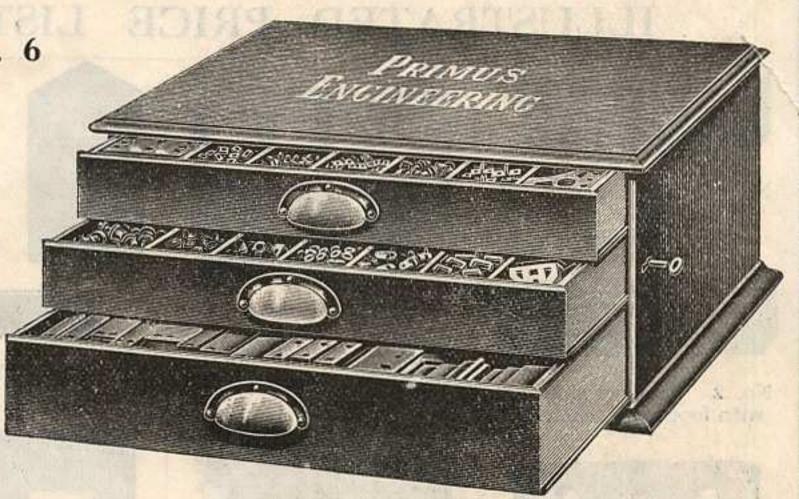

LIST OF EXTRA PARTS.


12	Wire Stays,	15 in.	No.	154	2 Gear Wheels		No.	160
12	n n	$2\frac{1}{2}$,,	11	155	2 Pinion Wheels		,,	161
6	D 10	33		156	2 Bevel Gears		. ,,	162
4	Pulley Whee	els	,,,	158	6 Tapped Rods		**	167
6	,, ,,	* *	.,,	159	4 ,, Collars	7.0	,,	168

SUPPLEMENTARY OUTFITS


These outfits are supplementary to the standard sets, and should only be purchased as such.

The contents are not selected with the view to building complete models, but to supplement the parts of one of the standard sets, so that it becomes equal in its number of parts to that of the next higher price.


	*			, had		Price
No.	15—Converts					L. Coi
200	the No. 2					12/6
No.	2S—Converts the					
	the No. 3				100	20/0
No.	3S-Converts the					
	the No. 4					25/0
No.	4S-Converts the	e No.	4	Outfit	into	
	the No. 5					35/0

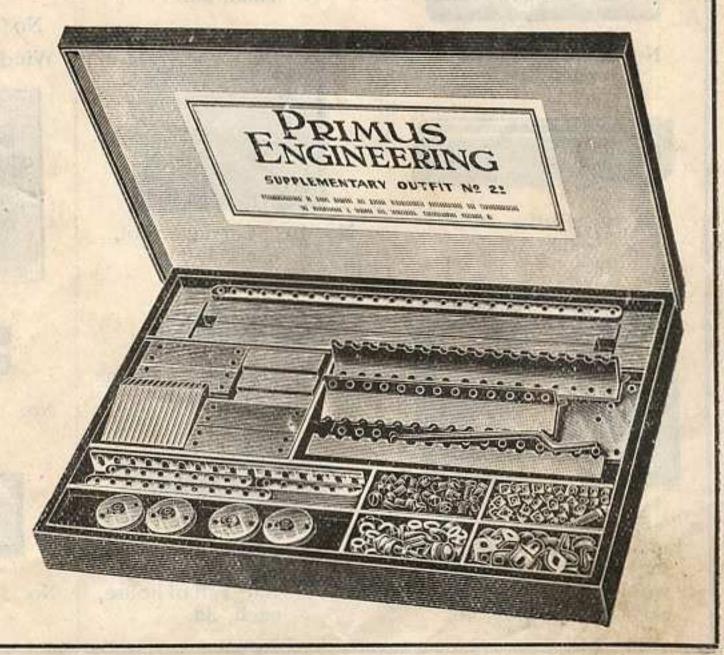


ILLUSTRATED PRICE LIST OF PARTS.



No. 1. Grooved side rail for carriage and truck, each, 4d.



No. 2. Grooved side rail with footboard, each 6d.

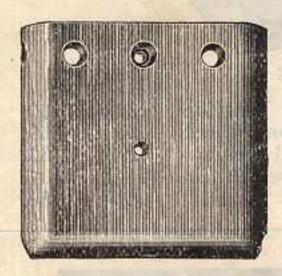


No. 3. Carriage ends, each, 6d.




No. 4. Buffer Blocks, each, 3d.



No. 5. Left-hand carriage window, each, 4d.




No. 6. Right-hand carriage window, each, 4d.




No. 7 No. 8

No. 7. Carriage doors. each, 4d.

No. 8. Centre windows, each, 9d.

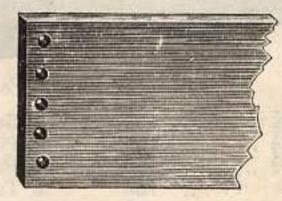

No. 9. Floor for carriage, each, 5d.



No. 10. Carriage roof, each, 1/0



No. 11. Posts for railings per doz., 1/6



No. 12. End rail of house, each, 3d. No. 13. Side rail of house,


each, 3d.



No. 14. Sides of house, each, 8d.




No. 15A. Window sills, per doz., 1/0

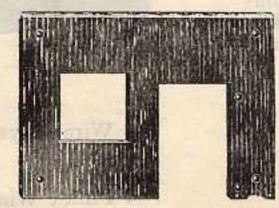

No. 15B. Front and Back of house, each, 1/6.


No. 15D. Window sash, per doz., 9d.




No. 16, Door of house, each, 6d.



No. 16a. Door lintels, per doz., 1/0




No. 17. Truck sides, each, 4d.

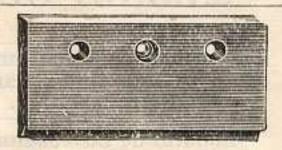


No. 18. Truck Ends, each, 6d.



No. 19. House baseboard, each, 3/0

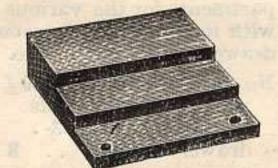

No. 21. Steps, each, 6d.

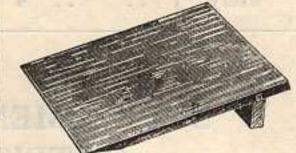

No. 22. Station Slope, each, 8d.



No. 23. Platform centre, each, 8d.



No. 24. Platform sides, each, 10d.




No. 25. Wood slips, 3 by 1 in., per doz., 2/0


Dunn




Nos. 50 and 51. Screws and nuts, per doz., 6d.

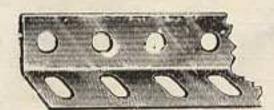


	Angle I	Bars.
No.		Per 1 doz.
52	6	1/3
53	61/2	1/6
54	8	1/9
55	12	2/3

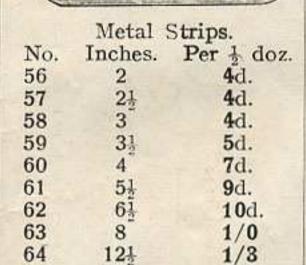



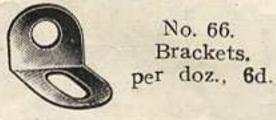

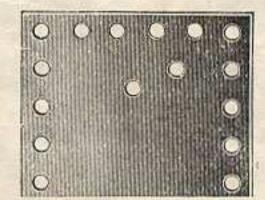

Metal Plates.

No. Size. Per ½ doz.

67 8×3 in. 3/0

68 3×3 in. 1/6

PRIMUS ENGINEERING




Ridge Tiles.

No. Inches. Per ½ doz.

69 6½ 3/0

70 8 4/0

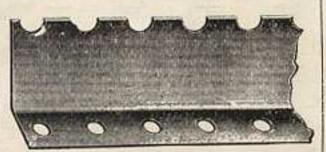


No. 71. Eaves, 8 in., per ½ doz., 4/0




No. 72. Straight hinges, per doz., 9d.




No. 73, Bent hinges, per ½ doz, 1/0



No. 74. Trunnions, each, 3d.



No. 75. Flanged wheels, each, 9d.



No. 76. Pulley wheels, grooved, each, 9d.


No.		Per	dozen
77	Axles,	3½ in.	1/0
78	,,	23 in.	1/0
79	**	$1\frac{1}{2}$ in.	1/0
165	11	$6\frac{1}{2}$ in.	2/0
166	"	8 in.	3/0
169	.,,	3 in.	1/0
		100	



No. 82. Collars and screws, each, 3d.



No. 84. Washers, per doz., 2d.

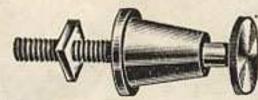

No. 85. Buffers, each, 8d.



No 87. Carriage lamps, each, 6d.

Mo Dom



No. 88. Carriage door handles, each, 6d.
No. 89. Turnbuttons, per ½ doz., 4d.





No. 90. Carriage Rails, per ½ doz., 4d. No. 91. Carriage door screws, per doz., 1/6






No. 92. Knobscrew and nuts, per ½ doz., 2/0
No. 93. Turnbuttons, per ½ doz., 3d.






No. 95. Catches, per ½ doz., 4d. No. 97. Wood Screws, per doz., 3d.




No. 96. Signal Post rods, per ½ doz., 8d.

No. 100. Wood handle screwdriver, each, 6d.

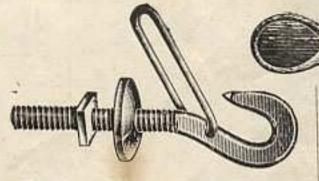

No. 86. Coupling Hook, each, 8d.

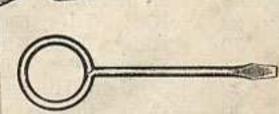

No. 101. All metal screwdriver, each, 3d.



CONTENTS OF OUTFITS.

PART		OUTFIT NO.						RE E		
NO.	DESCRIPTION OF PART	1	1s	2	2s	3	3s	4	4s	5
1	Side Rails		4	4		4		4	2	6
2	Side Rails with Foot-board						2	2		2
3	Carriage Ends				- 20		2	2	10_0	2
4	Buffer Blocks		2	2	_	2	200	2	2	4
5	Carriage Window				-	-	2	2 2		2
6	Carriage Window		-		5		2	2	1	2
7	Carriage Doors	-					4	4	-	4
8	Central Window	-	-	-		_	2	2		2
. 9	Carriage Floor		1	1		1		1	1	2
10	Carriage Roof	-			-		1	1	200	1
11	Poets for Railings	1240	2	2	15	17		17	200	17
12	D. J D. II	1		100			-		2	2
13	Side Poil	UHES !	200	225	200				2	2
14	House Sides	20.25	200	45 }	1	Laber	15-12	200	2	2
15A	Window Cille				-		-		4	4
15D	Window Cook	-	- N. C. S. C.				0.50	0.0	2	2
15в	House Fronts					A COL	-		2	2
16	Doors of House				10		2000		2	2
16A	Lintels for House	_			-		-	-	2	2
17	Sides of Goods Truck		2	2		2	-	2		2
18	Ends of Goods Truck		2	2		2	-	2		2
19	Basahaard								1	T
21	Steps		1		1	1		1		i
22	DI-16				i	i	-	i		i
23	District District Control	_			2	2	lane -	2		2
24	Platform Plank Centre	9			2	2	- V	2		2
25	William Clina	8	8	16	9	25		25		25
26	Glass for Windows		_		_	_	-	_	4	4
50 & 51	Screws and Nuts	36	30	66	54	120	24	144	168	312
52	Angle Bars, 6 in	_	_	_	_				4	4
53	Angle Bars, 6½ in		2	2	-	2		2	6	.8
54	Angle Bars, 8 in	2	-	2 2	2	1 4	_	4	4	8
55	Angle Bars, 12 in					1	2	2	_	2
56	Metal Strips, 2 in	4	4	8		8	2	10	6	16
57	Metal Strips, 2½ in	6		6	2	8		8	8	16
58	Matal String 2 in				4	4	4	8	1 _	8
59	Metal Strips, $3\frac{1}{2}$ in	2	6	8		8	6	14		14
60	Metal Strips, 4 in	2	-	2	1	3		3	7-3	3
61	Metal Strips, $5\frac{1}{2}$ in		1		4	4	_	4	-	4
62	Metal Strips, 6½ in	_	2	2	2	4	-	4	-	4
63	Metal Strips, 8 in	2	-	2	4	6		6	6	12
64	Metal Strips, 12½ in		-		3	3	-	3	-	3
65	Architraves	-	4	4	-	4	_	4	4	8
66	Brackets	12	4	16	22	38	2	40	38	78
67	Metal Plates, 8×3	-		10-	4	4	_	4	6	10
68	Metal Plates, 3×3	3		3	-	3	11	14	_	14
69	Ridge Tiles, 6½ in		_		1	1		i		1
70	Ridge Tiles, 8 in	-	-		1	1		1	1	2
71	Eaves Tiles, 8 in	1	1	-	4	4		4	6	10
72	Straight Hinges	1000	4	4		4	-	4	2	6
73	Bent Hinges		100	100	1	1000	8	8	77.0	8
74	Trunnions for Wheels	4	-	4	-	4	4	8		8
75	Flanged Wheels	4	_	4	-	4	4	8		8
76	Grooved Wheels	-			4	4		4	-	4
77	Axle Rods, 3½ in	2		2	-	2	2	4	_	4
	1 2	- 4	I to you		N. Carlotte	4	, 4	7.6	11	

PART	DESCRIPTION OF PART			OUTFIT NO.								
NO.				1	1s	2	2s	3	3s	4	48	5
78	Axle Rods, 23 in				2	2		2	4	6		6
79	Axle Rods, 1½ in			-	-	-	1	1	_	1	-	1
82	Collars, and Set Screws			4	-	4	4	8	5	13	-	13
83	Handle Axles					-	1	1	-	1	-	1
84	Washers			12	-	12	-	12	24	36	12	48
85	Buffers			-	4	4	-	4		4	4	8
86	Coupling Hooks			-	2	4 2	1	3		3	1	4
87	Lamps				-		2	2	2	4	2	6
88	Carriage Door Handles			-	1000	100 mm	-		4	4		4
89	Turn-buttons				-		-		4	4		4
90	Side Rails			-	54			-	4	4		4
91	Door Screws				1 1/2 27				16	16		16
92	Knob Screws	• •	* *			200	1	1	3	4		4
93	Turn-buttons				1				2	2		2
95	C-1-1				4	4		4		4		4
96	Connecting Rods				2	2		2		2	2	1
97	777 1 0		***		6	2 6		6		6	6	12
100	0					1	1707070	1		1		1
101	Screw-driver		• •	-			181100		The same	1	the late	

EXTRA PARTS NOT INCLUDED IN OUTFITS.




No. Length ½ doz.

154 Wire Stays 1\frac{1}{2} inches, 3d.

155 ,, ,, 2\frac{1}{2} ,, 3d.


156 ... 3\frac{1}{4} ... 4d.




No. 158. Pulley Wheels with set screws, each 6d.



No. 168. Double Tapped Collars, each, 4d.



No. 159 Pulley Wheels plain. each, 3d.

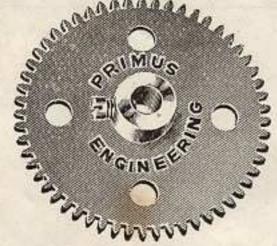


No. 160. Cog Gear Wheels, 15 in., 56 teeth, each 1/0




No. 167 Double Tapped Rods, $3\frac{1}{2}$ in., each 3d. No. 167a do. $2\frac{3}{3}$, , 3d.






No. 161 Pinion Wheels, No. 162 Bevel Gears, ½ in., each 9d. per pair 2/0

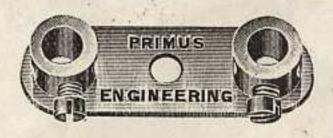


No. 164 Crank Arm each 8d.

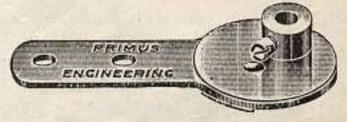


No. 163 Eccentric each 1/0

PRIMUS ENGINEERING PRIMUS ENGINEERING Nº O OUTFIT

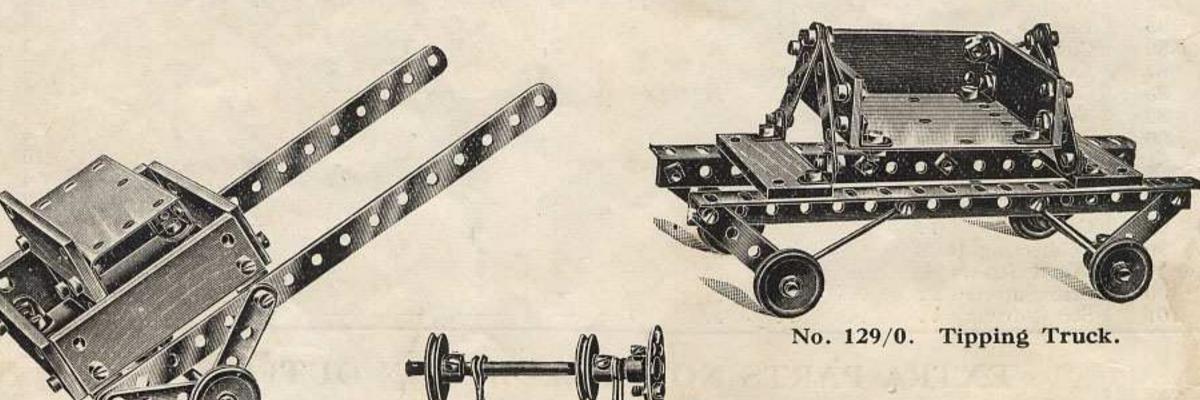


No. 125/0. Dog Cart.

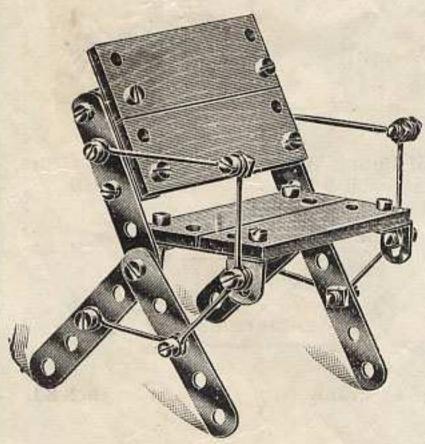

No. 105/0. Garden Seat.

The No. 0 outfit has several parts not included in the standard sets—it is intended to be a simple constructional toy for the younger children.

PRICE, 7/6.

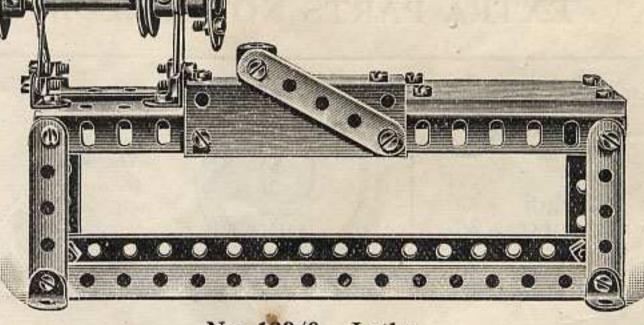


No. 139/0. Lathe.

No. 118/0. Travelling Crane.


These models are made with

PRIMUS ENGINEERING Nº 1 OUTFIT

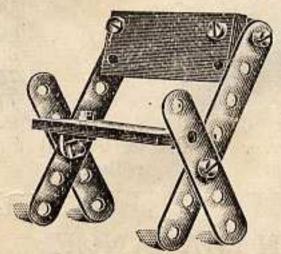

SEAT No. 1.

	About Decrees and Assert Assert		THE PARTY OF THE P	
2	Wood slips		No.	25
8	Screws		**	50
2	Strips, 2½ in.		,,	57
2	,, 31/2 ,,		11	59
4	Brackets		,,	66
Bra	ckets fixed wi	th slot	on wo	od.

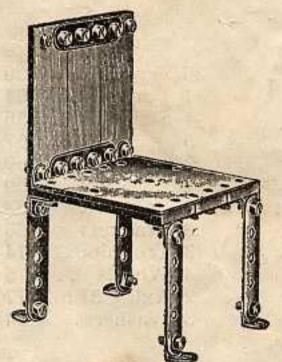

CHAIR No. 4.

6	Slips		No.	25
32	Screws		,,,	50
4	Strips, 2 in.		,,	56
4	", $2\frac{1}{2}$ ",		,,	57
10	Brackets	****	,,	66
1	Plate	550		68



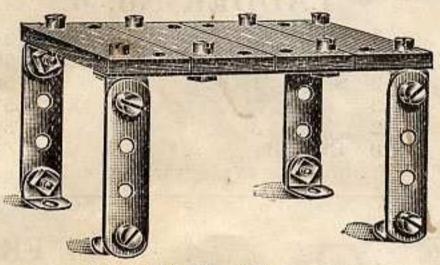


TABLE No, 2.

4	Slips							No	. 25
16	Screws	N.						,,	50
4	Strips,	2	in.					,,	56
2	- 11	4	**					"	66
8	Bracke	ets	- 1000					11	66
.4-in.	strips	SCI	rew	ed	below	table	to	0.000	top.

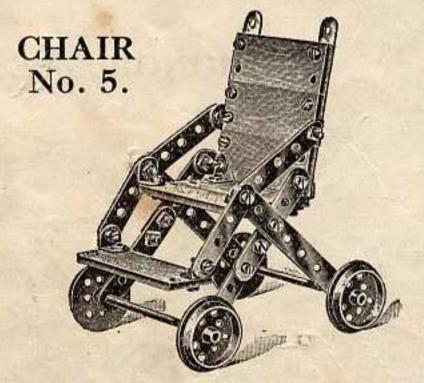

6	Slips	No	25	2	Strips, 4in.	No	60
	Screws				Brackets		66
		2 in. ,.				17	
6		$2\frac{1}{2}$,, ,,	57		Axles		77
2			59			274	

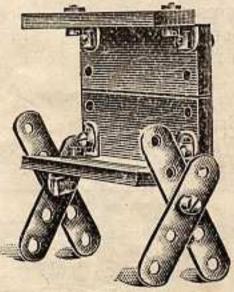


SEAT No. 3.

4	Slips				No	. 25
10	Screws				**	50
4	Strips,	2	in.	200	1100	56
2	THE RESERVE AND DESCRIPTION OF THE PERSON NAMED IN		***		.,	
6	Bracke				"	66
2-in.	strips	SC	rew	ed	behind	the
	V	TOC	d b	ack		




MUSIC STAND No. 8.

2	Screws.			No.	50
2	Strips, 2	Control of the Control			56
6	Control for State of the Control of	1 ,,	15.	S	57
2	,, 4	.,,		13	60
3	Brackets	3	• •	13	66

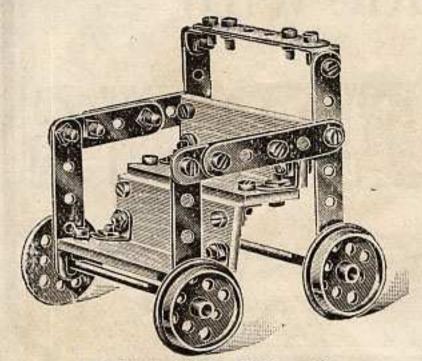


CHAIR No. 6.

4	Slips				No.	25
30	Screws				91	50
2	Strips, 2	in.				56
6	", $2\frac{1}{2}$	- 11			99	57
2	$_{,,}$ $3\frac{1}{2}$	11	*/*·		11	59
12	Brackets		4.4		- 11	66
4	Wheels			10.0		75
2	Axles, 3½	in.			**	77

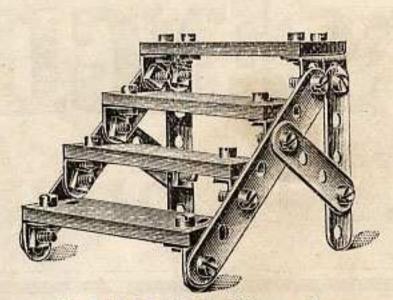


LADDER No. 6.

4	Slips	7 7 8 8 8 8		No. 25
22	Screws			,, 50
2	Strips, 2	in.		,, 56
2	$\frac{1}{1}$ $\frac{2\frac{1}{2}}{2}$	33	10.00	,, 57
2	,, 3½			,, 59
10	Brackets	• //•		,, 66
Fix	brackets to	steps	with slot	s at side.

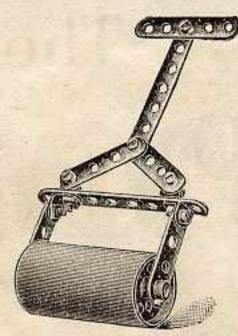

ROLLER No. 9.


8	Screws	No. 50
4	Strips, 2 in.	,, 56
1	$\frac{21}{2}$,, 57
1	$3\frac{1}{2}$	59
1	., 4 ,,	,, 60
4	Brackets	., 66
2	Wheels	,, 75
1	Axle, $3\frac{1}{2}$ in.	,, 77
2	Collars	,, 82
Cov	THE PARTY OF THE P	ard for
	roller.	

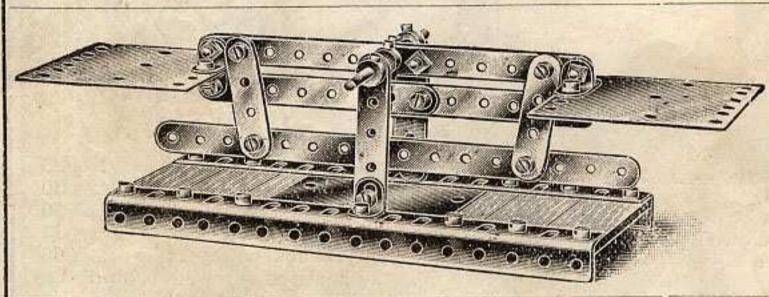


FRENCH BALANCE No. 10.

6 Slips . No. 25 2 Strips, 4 in. No. 60 30 Screws , 50 1 ,, 8 ,, 63 2 Bars, 8 in. , 54 10 Brackets , 66 2 Strips, 2 ,, 56 3 Plates, 3 × 3in. 68 2 , 2½ ,, 57 1 Axle, 3½ in. , 77 2 ,, 3½ ,, 59 4 Collars . 82


COUNTER SHAFT No. 23.

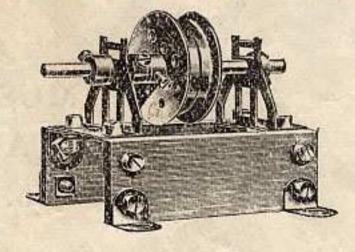


		No.			No.
2	Slips .	25	2	Wheels	75
12	Screws .	50	1	Axle, 3½ in.	77
8	Brackets .	66	3	Collars	82
2	Trunnions .	74	3	Washers	84

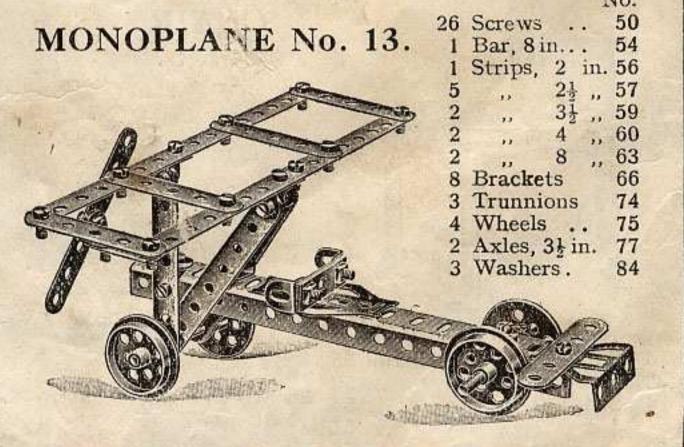


TOWER WAGON No. 44.

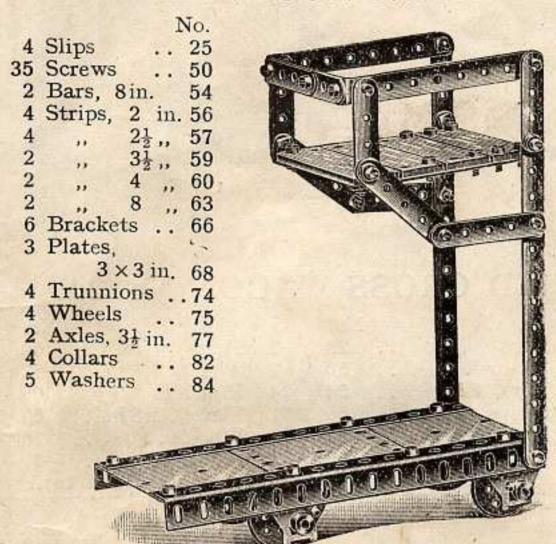

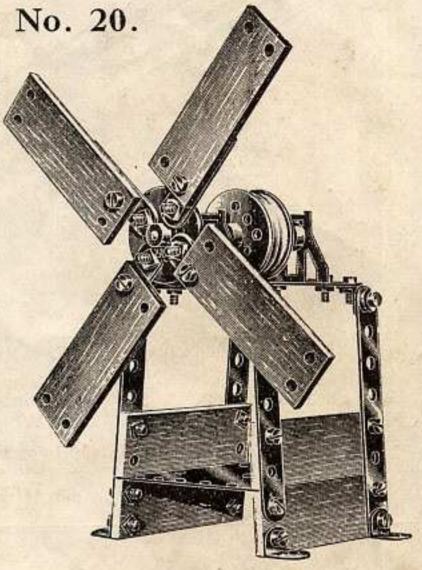


LIBRARY LADDER No. 42.

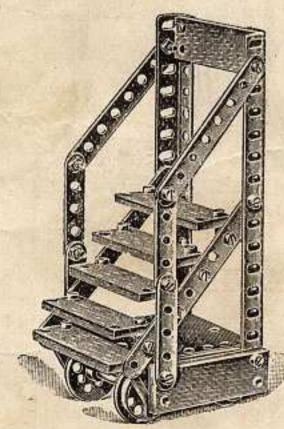


			1	No.			No.
8	Slips			25	1	Plate,	
	Screws					3×3 in.	68
2	Bars, 8	in.		54	2	Trunnions	74
2	Strips,	2	in.	56	4	Wheels	75
4		2	1)	57	2	Axles, 3½ in.	77
2	.,	31/2	,,	59	2	Collars	82
2		4	**	60	2	Washers	84
10	Bracke	ts		66			

TRUCK No. 33.

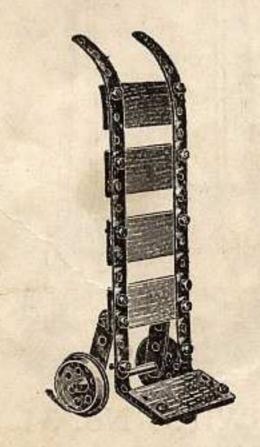


5	Slips			No.	25
16	Screws	245		,,	50
4	Strips, 2in.	100		11	56
2	,, 8 ,,		24.4	,,	63
2	Brackets	7.007		,,	66
2	Wheels			,,	75
1	Axle, 31 in.		Salinia	,,	77

SHAFTING No. 35.

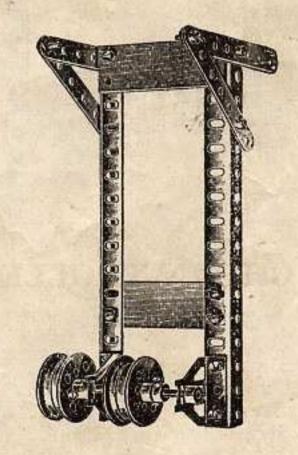


	1	Vo.		No.
2	Slips	52	2 Trunnion	s 74
	THE RESERVE THE PROPERTY OF THE PARTY OF THE	50	4 Wheels	75
2	Bars, 8 in.	54	1 Axle, 31 i	n. 77
	Strips, 3½ in.			
2			3 Washers	

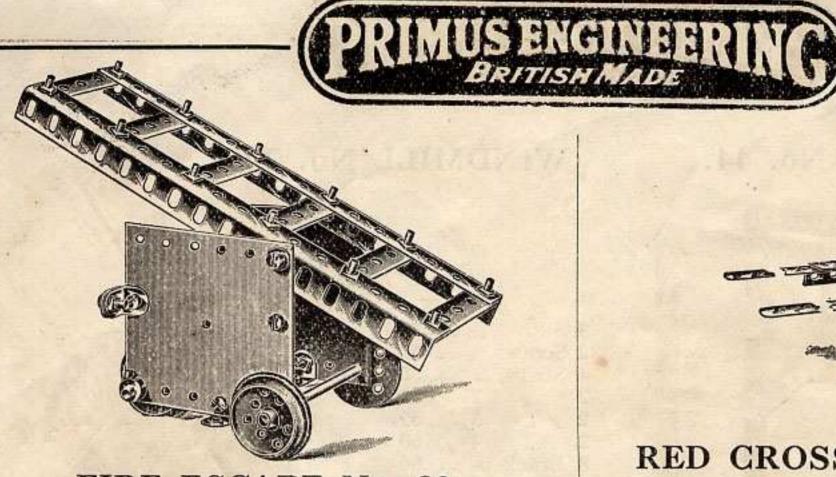


FIRE ESCAPE No. 30.

		No.			No.
24	Screws	 50	2	Plates, 3 × 3 in.	68
2	Bars, 8 in.	 54	4	Wheels	75
6	Strips, 2½ in.	 57	2	Axles, 31 in	77
1	,, 3½ ,,	 59		Collars	82
1	,, 4 ,,	 60	2	Washers	84
4	Brackets	 66			

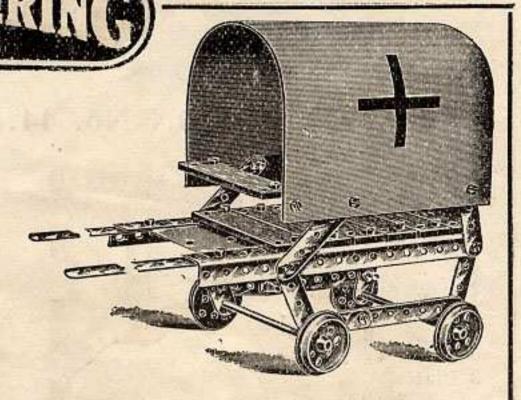


RED CROSS WAGON No. 24.

				No.			No.
8	Slips			 25	2	Strips, 4 in.	 60
34	Screw			 50	2		63
2	Bars,	8 in.		 54	4	Brackets	
4	Strips,	2	in.	 56	1	Plate, 3 × 3 in	
6	.,	21/2	**	 57	4	Wheels	75
2	***	$3\frac{1}{2}$		59	2	Axles, 3½ n.	 77
		S	7021			od is made of st	

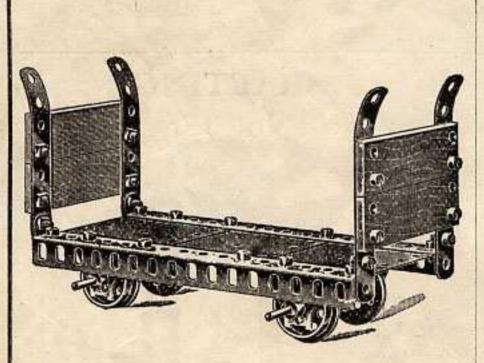


CHURN TROLLEY No. 27.

Slips No. 25 Screws .. 50 Bars, 8 in. 54 Strips, 3½ in. 59 Brackets .. 60 66 Plates, 3×3 in. .. 68 Trunnions 74 Wheels .. 75 2 Axles, 3½ in. 77 4 Collars .. 82

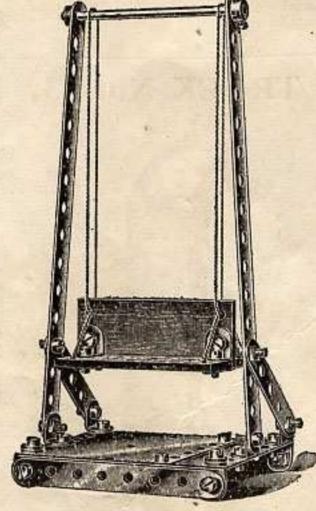


SWING No. 34.

3	Slips		No.	2
24	Screws		,,,	5
2	Strips, 2½ in.		,,	5
2	,, 4 ,,		"	6
2	,, 8 ,,		,,	6
12	Brackets		,,	6
2	Plates, 3 × 3 in.		,,	6
1	Axle, $3\frac{1}{2}$ in.		,,	7
2	Collars		,,,	8
4	Washers	7.	100	8

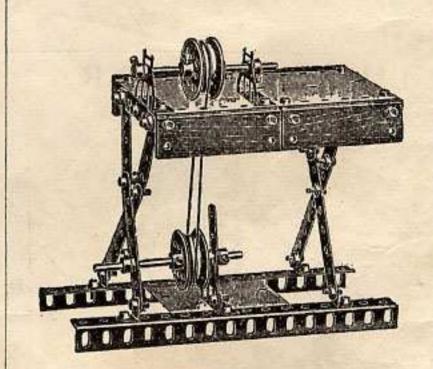


LATHE No. 43.

4	Slips			No.	25
36	Screws			93	50
2	Bars, 8 in.			**	54
4	Strips, 2 in.				56
5	,, 2½ ,,	*10*11		199	57
5	,, 3½ ,,			-11	59
2	,, 4 ,,			***	60
12	Brackets	*3*3		199	66
3	Plates, 3 × 3 in.			1.1	68
4	Trunnions	74. 47. 7	**	33	74
4	Wheels			111	75
2	Axles, 3½ in.			22	77
4	Collars		1000	11	82
9	Washers		187	**	84

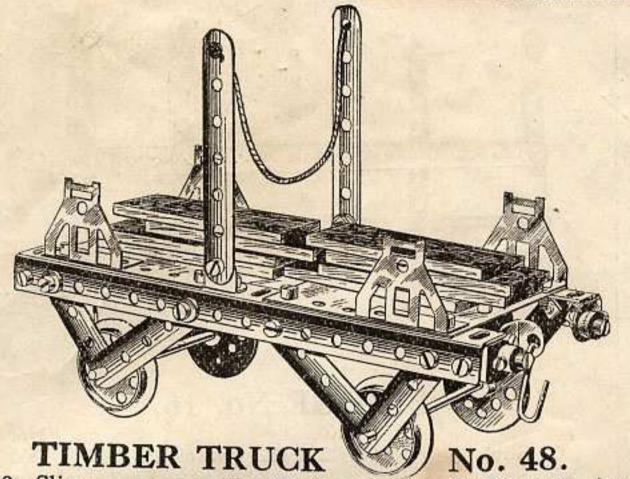


8	Slips		No.	25	2	Plates, 3×3 i	n. 9	No.	68
33	Screws		 .,	50				,,	74
2	Bars		 111	54	4			.,	75
4	Strips, 2	in.	,,	56	2	Axles, 3½ in.		,,	77
4	- 11	,,	 ,,	57	4	Collars		21	82
2	,, 3½	1,	 	59	12	Washers		99	84
10	Brackets		 n	66	1				

Wood slips are laid on to represent timber. Hooks are made from two pieces of bent wire.




ı									
	2	Slips			No.	20			-
	24	Screws		The section	,,	50		343	- Secretary
		Bars, 8i	n.	1,804		54			A PROPERTY OF
I	2 4 2 2 3 2 3 2 3	Strips, 2	l in	3.3	20	5/		4	950
l	2	4	2		2.0	00		/	420
I	2	" 。	22	I I I I I I I I I I I I I I I I I I I	2.1			/ 6	F. H
i	2	,, 4 ,, 8 Plates, 3	2 "	0 :	22.	03		/ /	
I	4	Flates,	3 X	3 m.	11	68		1 60	
ĺ	3	Wheels		***	9.9	75	/	A A	
l	2	Axles, 3	· in.		1 978	11	/		
I		Collars		* *	,,	84	/ 4		
I	. *	Bent wire	for	ns the h	ook.	/		0/10/	
						/	80	/ 60 /	- A C
						/	1	100/	
					/				
ı				-	/		0/		
I			-		2	10		/	
١		1	00	1200	THE PARTY	Ro /	00/		
		(6	6				(e)		
۱		1	$\sqrt{}$	911			0		
		100			13	(I) 0			5
ı				101	e la	。 ショル			C
и			0	_ XW X	0		No.		
				0	WO!	- 1			CTP.
	10.00	De	- September	60 /	V E		000		
	201		THE PROPERTY.	A THE PARTY OF	THE PERSON NAMED IN	100000000000000000000000000000000000000	DEED SALES OF THE		
		O CONTRACTOR OF THE PARTY OF TH	=		00				n de la companya della companya della companya de la companya della companya dell
		0000		201					Same and the same

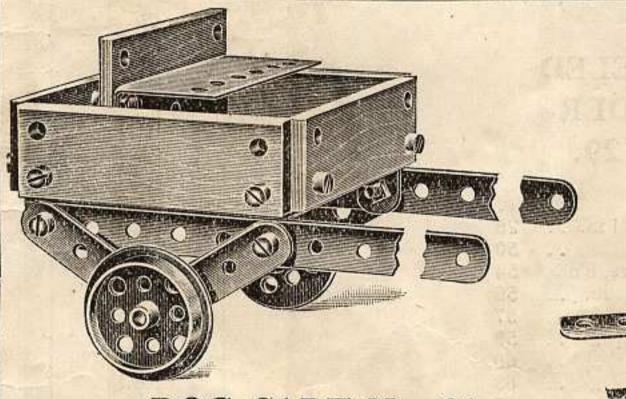


DOG CART No. 26.

5	Slips						No.	25
20	Screws?					152	,,	50
4	Strips, 2 in.			***			,,	56
2	,, 8,,						,,	63
12	Brackets						,,	66
2	Plates, 3×	3 in.						68
2	Wheels			17745	Travels:		,,	75
1	Axle, 31 in.				- 100		,,	77
100	The	8 in. s			e shafts			01057
1	The	8 in. s	strips i	orm th	e shafts	3.		

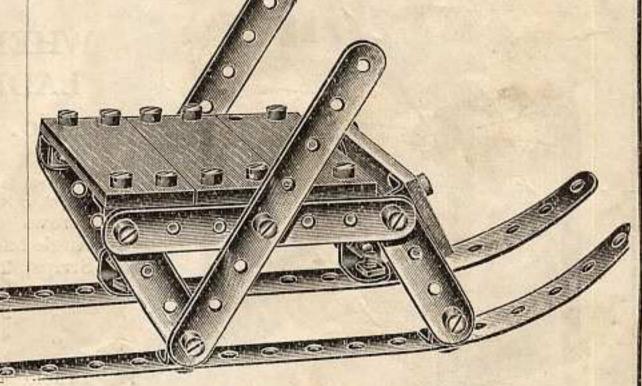


SLEDGE No. 19.

4	Slips					No.	25
26	Screws			-0.00	() () ()	111	50
4	Strips, 2 i	n				.,,	56
2	,, 21/2	,,	4.4	12/00	1.443	,,	57
2	$3\frac{1}{2}$,,				,,	59
2	., 4	,,					60
2	,, 8					11	63
10	Brackets					,,,	66

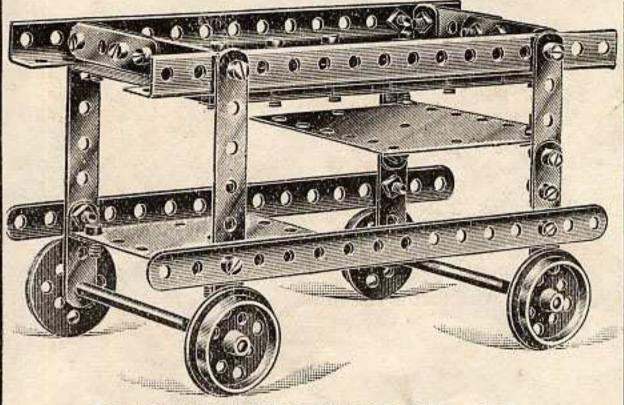


DINNER WAGON No. 14.

			No.			No.
Slips			25	2	Strips, 8 in	63
The state of the s			50	8	Part Control of the C	00
		0000	54	2	Plates, 3 × 3 in.	68
EN 1000 1000 1000 1000 1000 1000 1000 10			56	4	Wheels	75
ALL CONTRACTOR	202		57	2	Axles, 3½ in	77
	4		60			
	Bars, Strips,	Screws	Slips Screws Bars, 8 in Strips, 2	Screws	Slips 25 2 Screws 50 8 Bars, 8 in 54 2 Strips, 2 56 4 2½ 57 2	Slips 25 2 Strips, 8 in 50 8 Brackets 50 8 Brackets 51 2 Plates, 3 × 3 in. 51 51 51 51 51 51 51 51 51 51 51 51 51

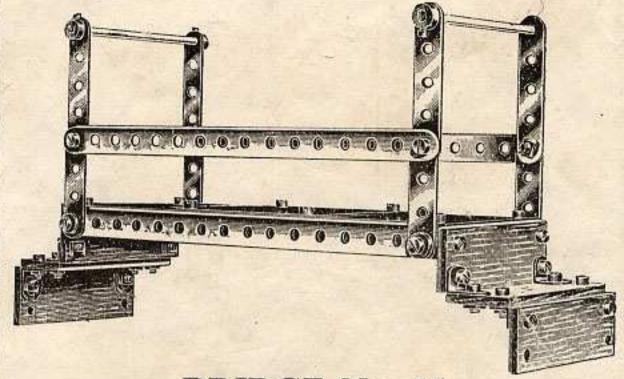

BRIDGE No. 16.

]	No.			No.
6	Slips .	1.	25	12	Brackets	66
36	Screws		50	3	Plates, 3 × 3 in.	68
2	Bars, 8 in.	55045	54	2	Axles, 31 in	77
4	Strips, 2 ,,		56	4	Collars	82
4	,, 21,,		57	8	. Washers	84
2	,, 8 ,,		63			

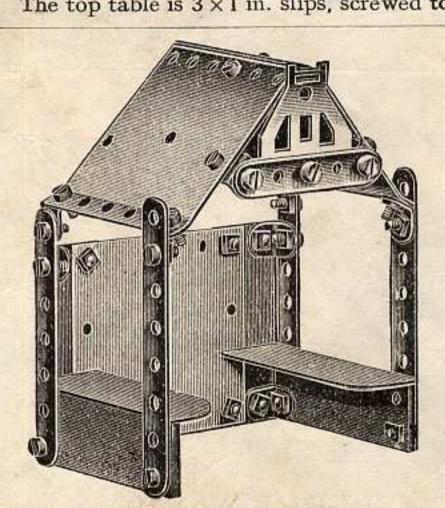

SUMMER HOUSE No. 12.

4	Slips		No.	25
30	Screws		11	50
1	Strip, 2½ in.		33	57
2	Strips,, 31 ,,		***	59
2	., 4 ,,		,,	60
12	Brackets	450	,,,	66
3	Plates, 3 × 3 in.		,,	68
1	Trunnion		,,	74
The	seats are formed	of car	dboa	rd.


WHEELED LADDER No. 29.


No.

75

2 Axles, 3½ in. ... 77
The rungs in the ladder are made by lacing cord through the 8-in. metal strips.


4 Wheels ...

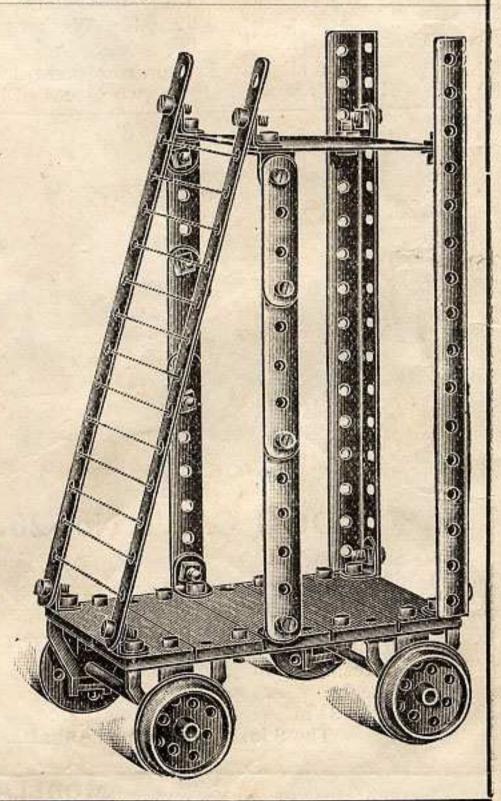

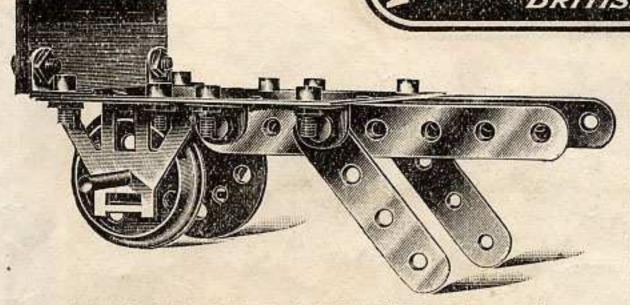


LUGGAGE BARROW No. 15.

			No.			No.
1	Slip	5903900	25	1	Plate, 3 × 3 in	68
10	Screws	* *	50	2	Trunnions	74
2	Strips, 2 in.		56	2	Wheels	75
2	,, 3½ ,,			1	Axle, 3½ in	77
6	The second second second second		00			

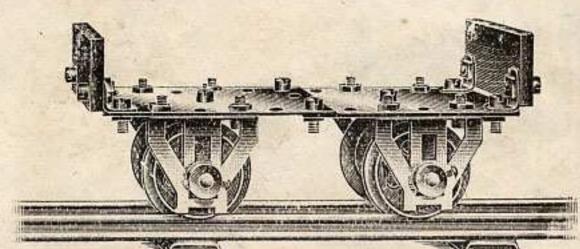


TROLLEY TRUCK No. 28

		1	No.				No.
2	Slips	14.	25	4	Trunnions		74
	Screws		50		Wheels		TE
4	Brackets	***	66		Collars	7474	82
2	Plates, 3×3	* *	68		Washers		

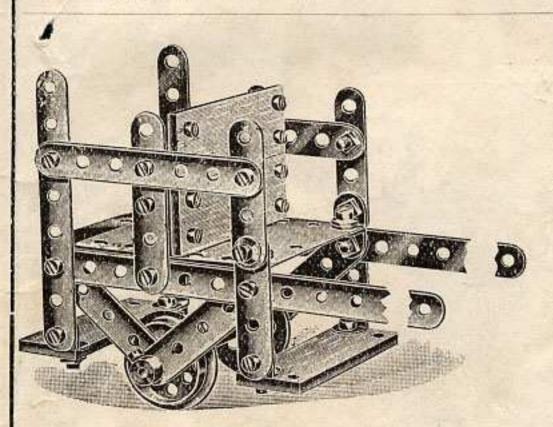

MAIL CART No. 25.


	*	No.
4	Slips	25
35	Screws	50
4	Strips, 2 in	56
-6	21	57
2	$3\frac{1}{2}$,	59
2	,, 4 ,,	60
2	,, 8 ,,	63
12	Brackets	66
2	Plates, 3 × 3 in.	68
2	Wheels	75
1	Axle, $3\frac{1}{2}$ in	77
2	Collars	00
12	Washers	84

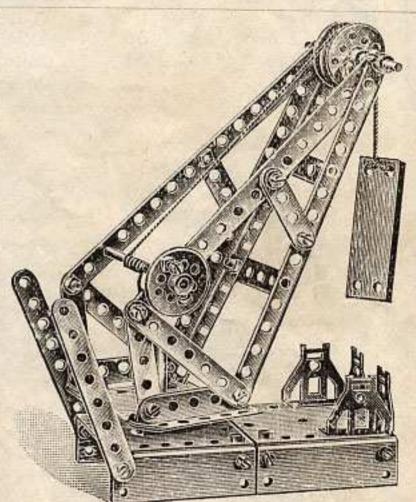


TRAILER CRANE No. 46.

No. 37.

		No.
4	Slips	 25
24	Screws	 50
4	Strips, 2 in.	 56
8	Brackets	 66
1	Plate, 3 × 3 in.	68
4	Trunnions	 74
4	Wheels	 75
2	Axles, $3\frac{1}{2}$ in.	 77
12	Washers	 84

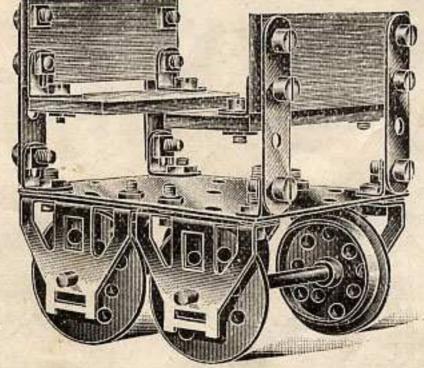


5	Slips, 3×1 in.	19/4		No.	25
36	Screws	472			50
2	Bars, 8 in.		/		54
4			***	**	56
6	$\frac{2^{1}}{2}$	***	* #	100	57
2	", $3\frac{1}{2}$ ",	***		34	59
2 2	., 4 .,	***		47	60
			***	244	63
12	Brackets		***	- 44	66
3	Plates, 3×3 in.		+ 2	**	68
4	Trunnions	• •	• •	**	74
4 2	Wheels			**	75
4	Axles, 3½ in.		• •	11	77
6	Collars Washers			2.0	82
10000	ong nail is used f	or cont		21	84
T.	ong han is used i	or cent	re br	п.	

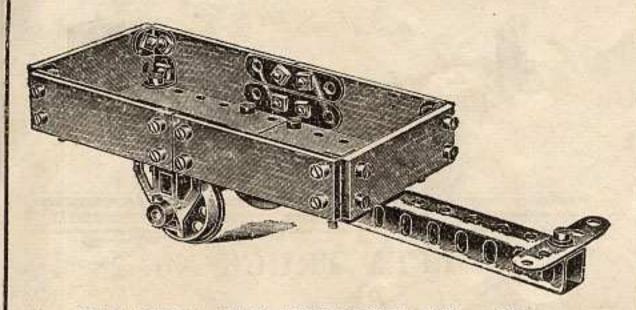


BAGGAGE TRUCK No. 31.

Slips	4 40	No.	25	2	Plates, 3×3ii	n. No.	68
DOMESTIC STREET			50	2	Trunnions	574	74
		11	54	2	Wheels	343	75
THE RESIDENCE OF THE PARTY OF T			56	1	Axle, 31 in	174	77
			57	2	Collars	144	82
			66	5	Washers	1.	84
	Bars, 8 in. Strips, 2 in. $\frac{1}{2}$,		Screws Bars, 8 in Strips, 2 in $2\frac{1}{2}$	Screws 50 Bars, 8 in 54 Strips, 2 in 56 ,, 2½,, 57	Screws, 50 2 Bars, 8 in 54 2 Strips, 2 in 56 1 ,, 2\frac{1}{2},, 57 2	Screws 50 2 Trunnions Bars, 8 in. 54 2 Wheels Strips, 2 in. 56 1 Axle, 3½ in , 2½ , 57 2 Collars	Screws 50 2 Trunnions Bars, 8 in. 54 2 Wheels Strips, 2 in. , 2½ ,, , 2½ ,,

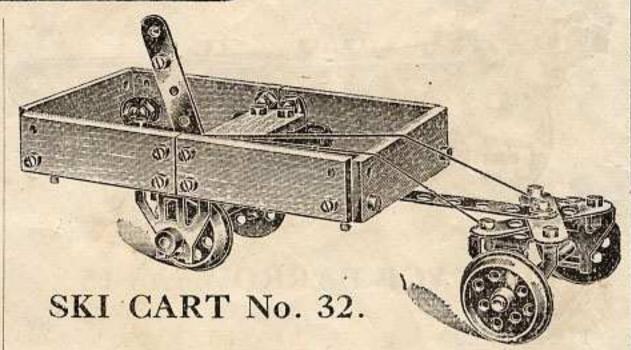


7	Slips	No.	25	4	Trunnions .	. No.	74
36	Screws	.,	50	4	Wheels .	. ,,	75
2	Strips, 2 in.	,,	56	2	Axles, 3½ in	. ,,	77
3	$,, 2\frac{1}{2},$		57	2	Collars .	. ,	82
1	., 8 ,,	- 27	63	3	Washers .		84
12	Brackets	"	66				100
2	Plates, 3×3 in.	1)	68	(Cord used for	steering	Š.

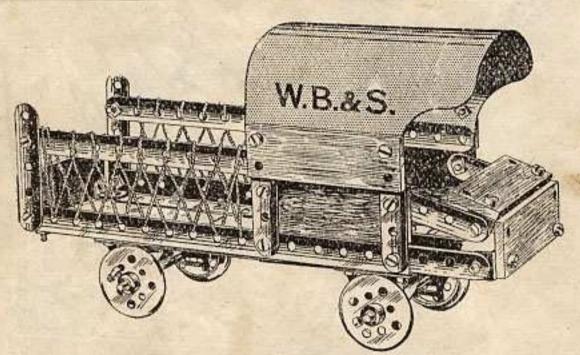

MOTOR LORRY No. 55.

7	Slips	No. 2	25	2	Strips, 8 in.	No.	63
36	Screws	,, 5	50	6	Brackets	111	66
2	Bars, 8 in.	5	54	4	Trunnions	11	74
4	Strips, 2 in.	5	66	4	Wheels	6	75
6		,, E	57	2	Axles, 3½ in.	,,	77
		card	cut t	o n	nake hood.		

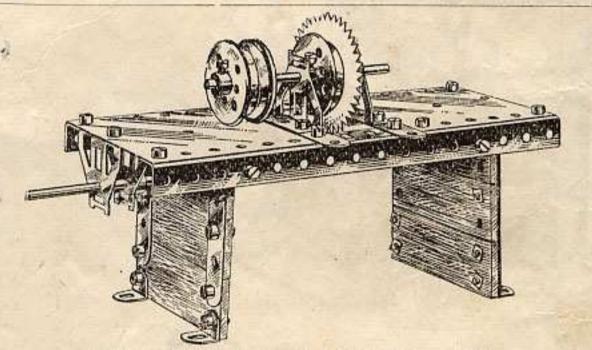


CIRCULAR SAW No. 56.


6	Slips		No.	25	2	Plates	No.	68
35	Screws		**	50	4	Trunnions	,,,	74
2	Bars		11	54	2	Axles	- 55	77
4	Strips,	2½ in.	,,	57	1	Collar		82
2	,,	4 ,,	111	60	1	Washer		84
8	Bracke	ts	,,,	66			56	
	The sa	w can		nt o	nt of a	niece of car	dhear	1

A.S.C. WAGON No. 57.


			No.	• (No.
Slips			25	12	Brackets		66
Screws	5		50	2	Plates		68
Strips	. 2	in.	56	4	Trunnions		74
	21		57	4	Wheels		75
	31		59	2	Axles		77
	4		60	4	Collars	400	82
100	8	,,	63	8	Washers	8.04	84
	Screws	Screws Strips, 2 2½ 3½ 4	Screws Strips, 2 in. 2½ 3½ 4	Slips 25 Screws 50 Strips, 2 in. 56 2½ 57 3½ 59 4 60	Slips 25 12 Screws 50 2 Strips, 2 in. 56 4 2½ 57 4 3½ 59 2 4 60 4	Slips 25 12 Brackets Screws 50 2 Plates Strips, 2 in. 56 4 Trunnions 2½ 57 4 Wheels 3½ 59 2 Axles 4 60 4 Collars 8 63 8 Washers	Slips 25 12 Brackets Screws 50 2 Plates Strips, 2 in. 56 4 Trunnions 2½ 57 4 Wheels 3½ 59 2 Axles 4 60 4 Collars 8 63 8 Washers

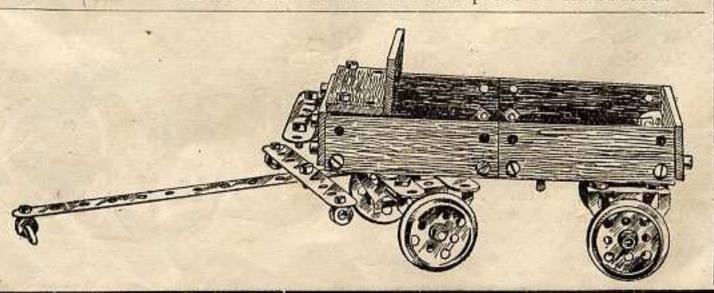


SIGNAL No. 50.

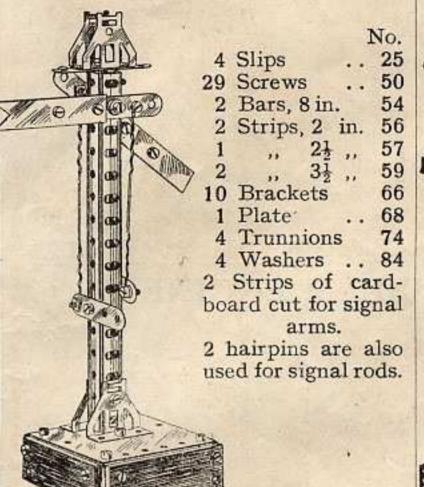


VANE No. 51.

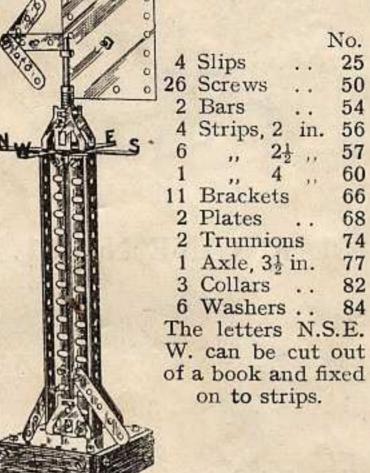


SIGNAL, No. 52.

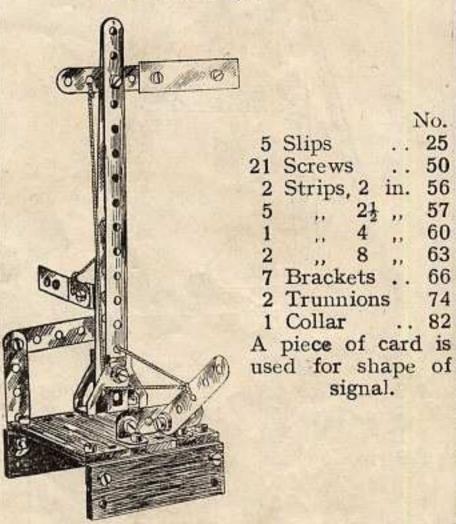


SIGNAL No. 53.

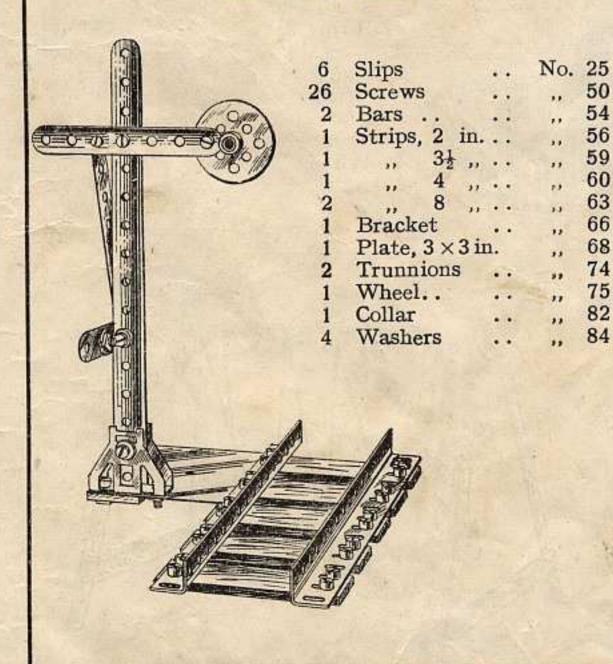


SIGNAL No. 54.

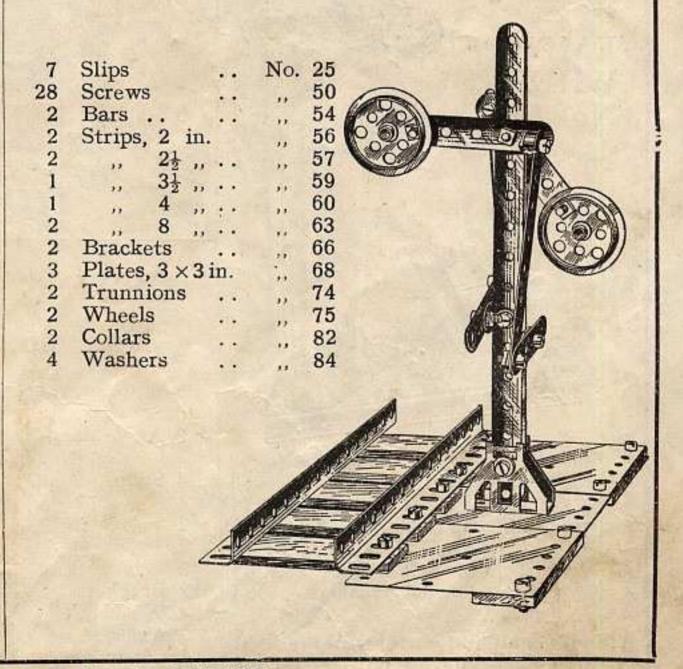

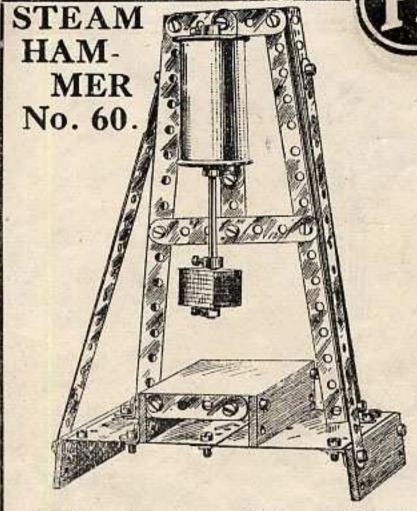


4 Slips No.	25	2 Strips, 8in No63							
- SC TANKER THE STATE OF THE ST	50	12 Brackets ,, 66							
2 Bars ,,	54	2 Plates ,, 68							
1 Strip, 2 in.	56	2 Wheels ,, 75							
2 ,, 2½,,,,	THE STREET STREET	1 Axle ,, 77							
1 ,, $3\frac{1}{2}$,,,									
Small squares	Small squares of cardboard fixed on to								
axle for hammer.									
		pard for had and an							

Flat piece of cardboard for bed and an inverted mantle-case is used for cylinder.

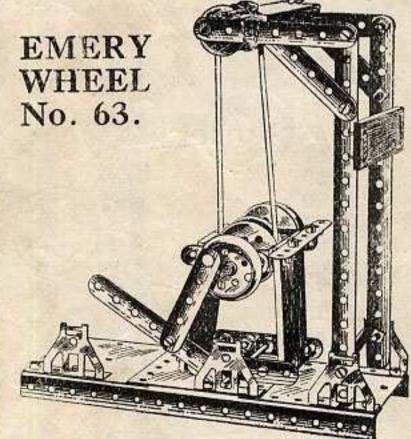


6 Slips No. 25	8 Brackets No. 66
30 Screws ,, 50	3 Plates ,, 68
² Bars, 8 in, 54	4 Trunnions ,, 74
² Strips, 2in. ,, 56	3 Wheels ,, 75
$5 \frac{2_1}{2}, \dots, 57$	2 Axles, 3½in.,,77
2 , 31, , 59	2 Collars , 82
2 4, 60	4 Washers ,, 84
2 ,, 8 ,, , 63	
	Compared to the Compared to th

A French nail and cotton reel are used in this model; also a pill-box lid for emery wheel.

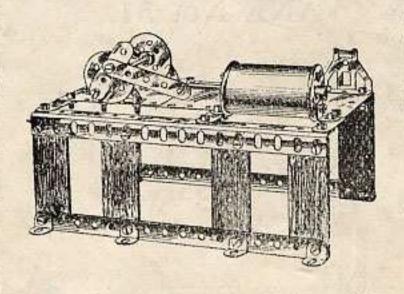


MILL ENGINE No. 61.

		1	Vo.		No.
6	Slips		25	8 Brackets	66
	Screw		50	3 Plates	68
	Bars	• • • •		4 Trunnions	74
	Strip,			4 Wheels	75
4		21 ,,		2 Axles	77
2		0		2 Collars	82
Us	e inver	rted n	iant	ele-case for cylin	der.

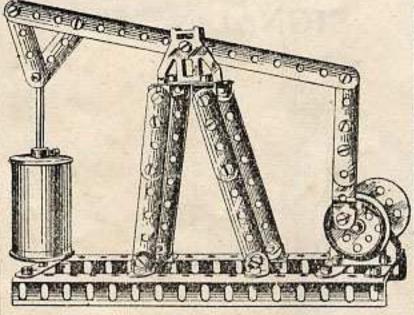

BEAM ENGINE No. 62.

No.	No.
35 Screws 50	2 Strips, 8 in. 63
2 Bars 54	
4 Strips, 2 in. 56	4 Trunnions 74
6 ,, $2\frac{1}{2}$,, 57	4 Wheels 75
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	2 Axles 77
2 4 60	3 Collars 82
	ntle-case is used for linder.

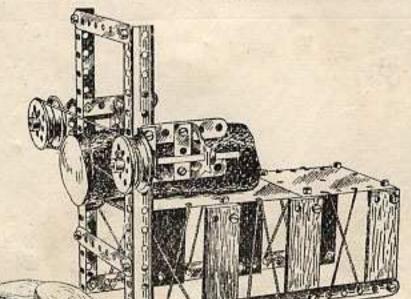


BAND SAW No. 64.


6	Slips		× • × • ×	No	25
36	Screws	***		11	50
2	Bars, 8 in.		F 16	.,	54
4	Strips, 2½ in.	3474	***	148	57
2	., 4 ,.		0.0	7,	60
2	,, 8 ,,		11		63
8	Brackets	24	22	**	66
3	Plates		110		68
4	Trunnions			- ++1	74
4	Wheels	4.9	101	24.6	75
2	Axles, 3½ in.		0.00	100	77
2	Collars	404	100	306	82
10	Washers	* *		CHE I	84


SWING


No. 65.

8	Slips	***	No.	25
	Screws			50
2	Angle I	Bars,		20000
		8 in.	111	54
4	Strips,	2 in	1. ,,	56
4	,,	$2\frac{1}{2}$,		57
2	**	$3\frac{1}{2}$,	F . FF	59
2	11			60
2	***	8 ,		63
12	Bracket	ts	44	66
4	Wheels		37	75
2	Axles		144	77
	Collars		41	82
2	Washer	S	100	84

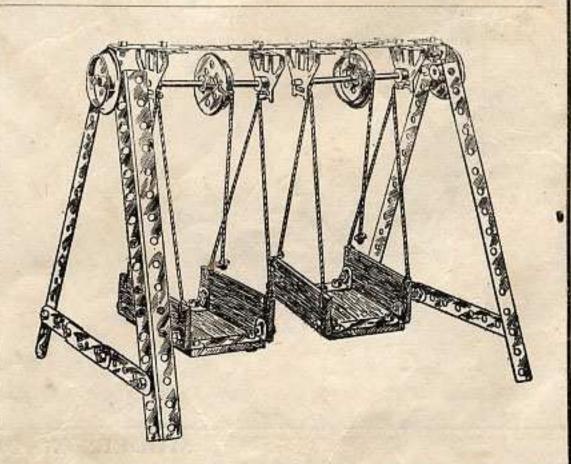

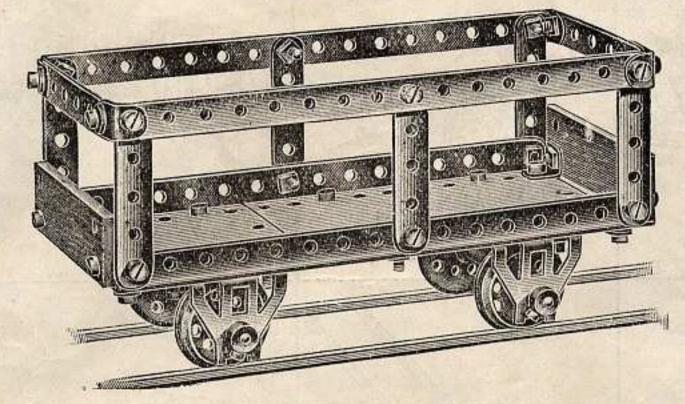

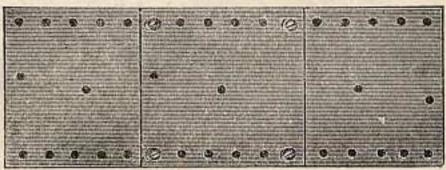

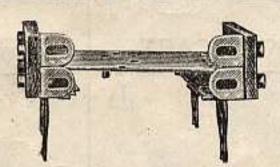

TIMBER TRUCK No. 38.


		No.			No.
2	Slips	25	3	Plates	 68
	Screws	. 50	4	Trunnions	 74
2	Bars, 8 in	. 54	4	Wheels	 75
6	Strips, 21 in.	57	2	Axles, 3½ in	77
2	Contract to the Contract of th	59	4	Collars	 82
2		63	12	Washers	 84
12	Brackets	. 66			

Make this truck before you attempt the others.

- (1) Fit Brackets inside Angle bars to slotted sides, with two washers to each screw.
 - (2) The trunnions should be fitted on first.
- (3) The axles and wheels must be put in last and a washer placed between EACH collar and the FACE of trunnion to allow the axles to run easily.

The base is composed of three No. 68 plates, which can be laid in loose, and caught between the sides when they are pressed in and the end screws tightened up, or they can be bolted together as shown in diagram. Note.—In trucks with a short base reduce the length by bolting in other holes.


Position of Brackets to Secure the Ends.—The Brackets are fitted on with the slots at the ends as shown; this allows a little play to introduce the base plates, and afterwards the sides can be pressed in and the screws tightened.

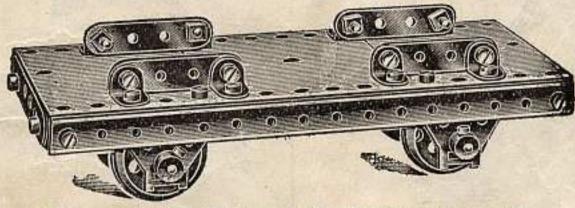

TRANSPORT TRUCK No. 39.


24	Screws	2011		•:3		No.	50
The second secon	Bars, 8 in.					11	54
4	Strips, 2 in.			4.4	100	11 *	56
2	,, 2½ ,,					,,	57
12	Brackets	• •	1.			,,	66
3	Plates, 3×3 in.					,,	68
4	Trunnions		4			11	74
4	Wheels					22	75
2	Axles, 3½in.			***		"	77
4	Collars					30	82
	Washers	25.				,,	84
T	wo washers are	place	ed betv	ween	each !	Brac	ket
and	the Bars wher	e they	are b	olted	on, to	adj	ust

the 2½ in. strips.

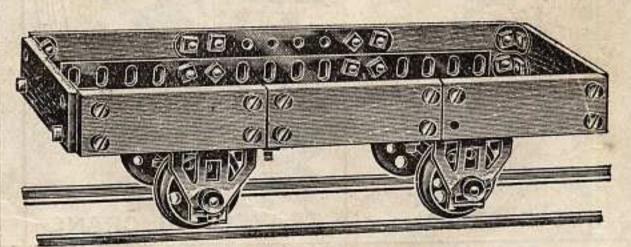


BALLAST TRUCK No. 40.

8	Slips	 		3 THE REST OF THE	25
36	Screws	 	-	 4.6.	50
2	Bars, 8 in.	 100	-	 	54
4	Strips, 2 in.	 		 	56
2	,, 4 ,,	 	2000	 	60
8	Brackets	 			66
3	Plates, 3 × 3in.			 	68
4	Trunnions				74
4	Wheels	 		11 %	75
2	Axles, 3½ in.	 		 ,,	77
4	Collars	*.*		,,	82
8	Washers	 	• •	 .,,	84

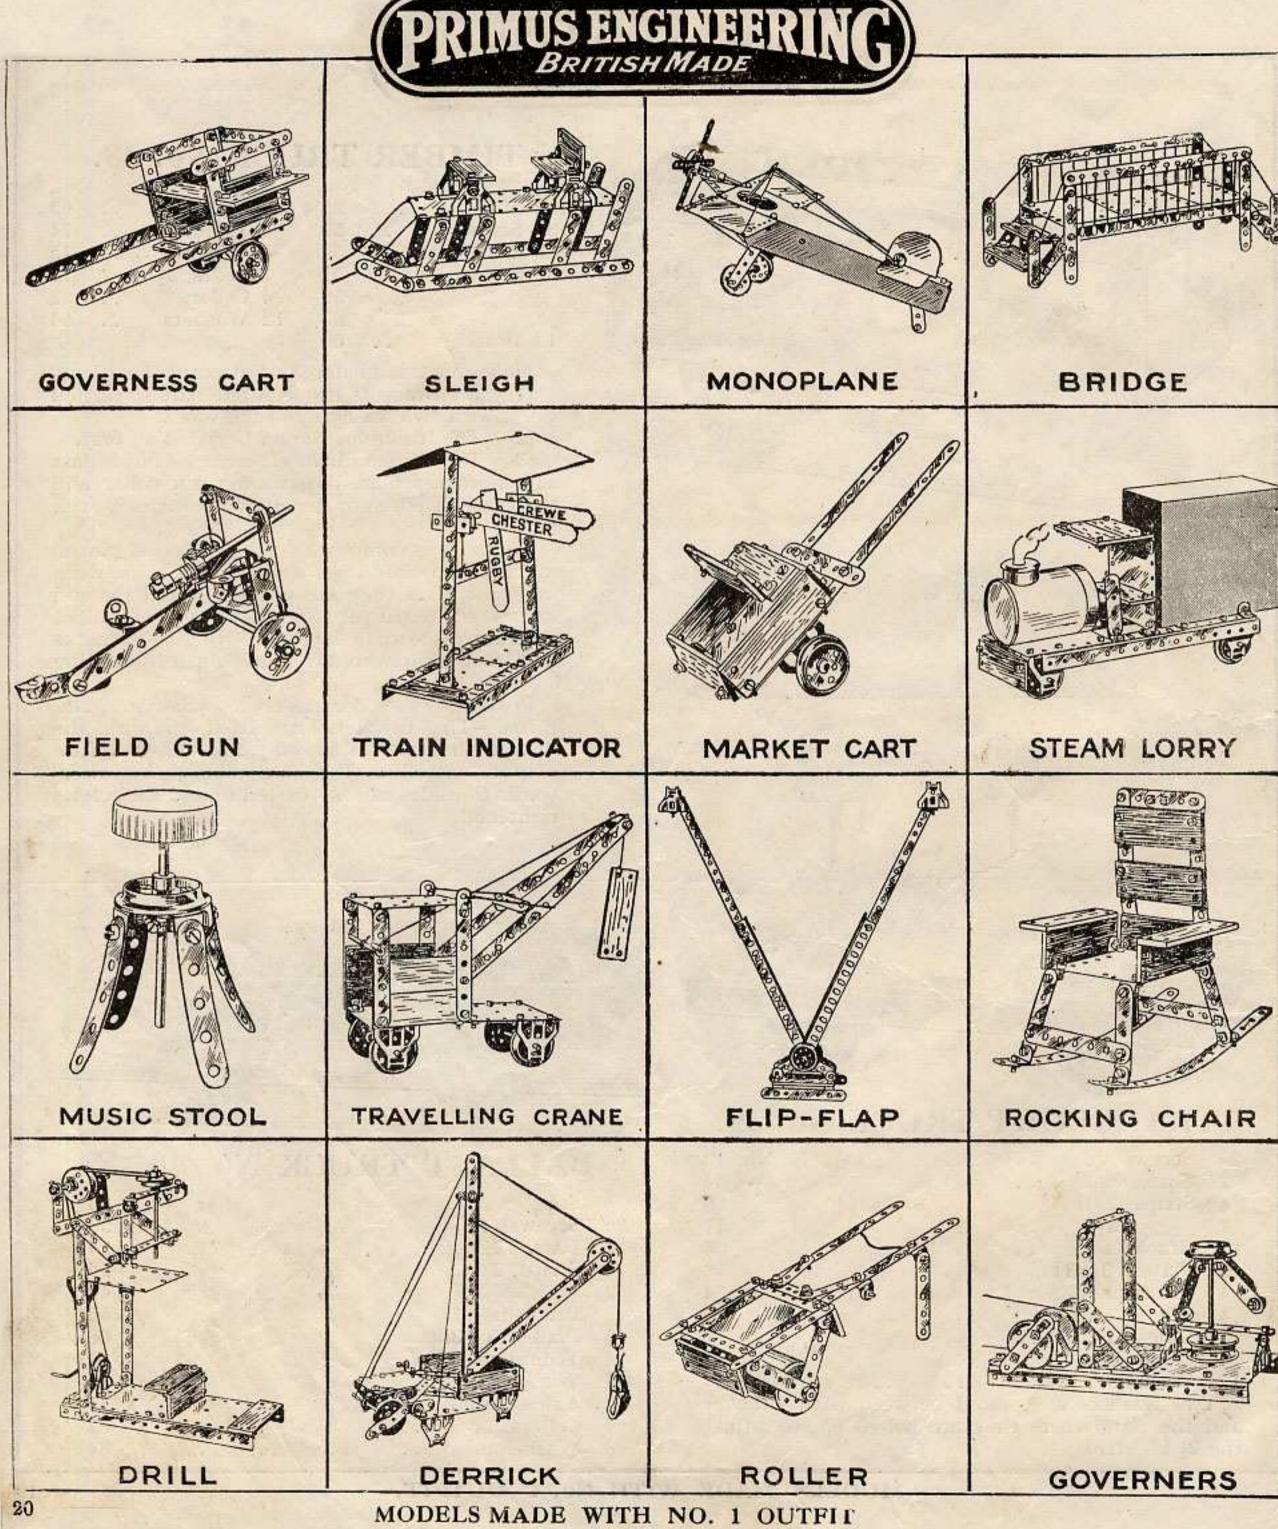

These models are made with

PRIMUS ENGINEERING Nº 2 OUTFIT

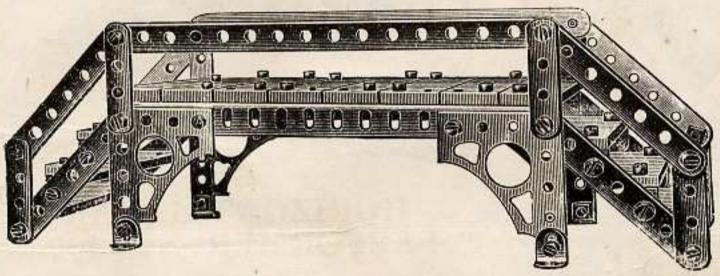


FOOT BRIDGE No. 107.


14	Slips	10.000			No. 25	5
	Screws	100			,, 50	8
2	Bars, 8 in.				,, 54	
8	Strips, 2 in.				,, 56	
8	,, 3½ ,,				,, 59	
2	,, 8 ,,	22.50	1000	* *	., 63	PS 1
16	Brackets				,, 66	
4	Architraves			* *	,, 85)

CARRIER TRICYCLE No. 131.

		No.			No.
9	Slips	25	4	Hinges	72
60	Screws	50	4	Trunnions	74
8	Strips, 2 in.	56	3	Wheels	75
3	$\frac{1}{1}$ $\frac{2\frac{1}{2}}{2}$	57	1	Axle, $3\frac{1}{2}$ in.	77
1	$3\frac{1}{2}$,,	59	1	23 ,,	78
1	., 4 .,	60	4	Collars	82
1	$_{,,}$ $6\frac{1}{2}$ $_{,,}$	62	6	Washers	84
13	Brackets	66	3	Buffers	85
3	Plates,		1	Catch	95
	3×3 in.	68	1	Rod	96

Driver's seat made of cardboard.

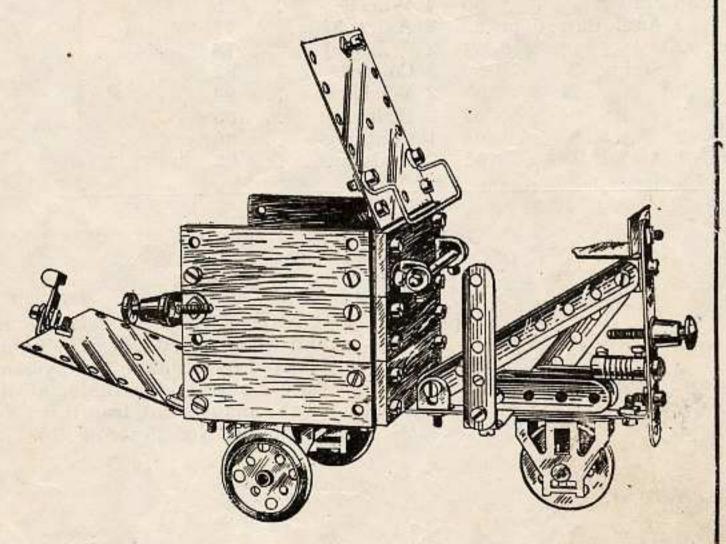


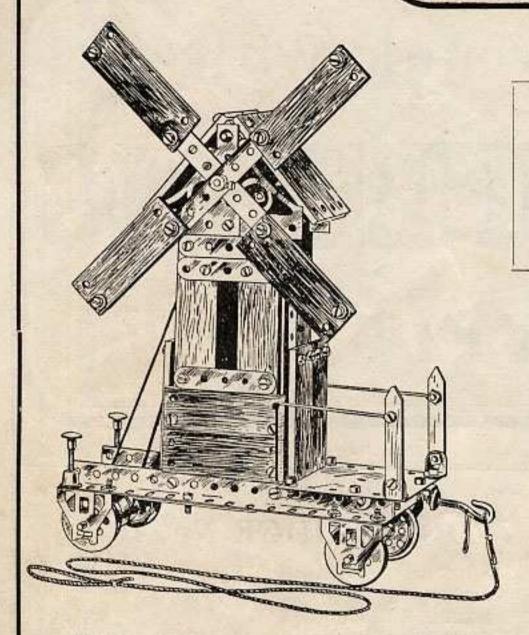

WORKING MODELS.


WORKING WINDMILL No. 138.

		No.			No.
1	Floor	9	9	Brackets .	 66
2	Posts	11	3	Plates, 3×3.	 68
16	Slips	25	4	Trunnions .	 74
55	Screws	50	4	Wheels	 75
2	AngleBars, 611	n. 53	2	Axles, 3½ in.	77
2	,, 8 i	n. 54	2	,, 23 ,,	78
4	Strips, 2 in.	56	3	Collars	 82
3	$\frac{1}{1}$, $\frac{2\frac{1}{2}}{2}$,	57	2	Washers	 84
2	$,, 6\frac{1}{2},$	62	2	Buffers	85
2	,, 8 ,,	63	1	Coupling .	 86
4	Architraves	65	2	Rods	 96

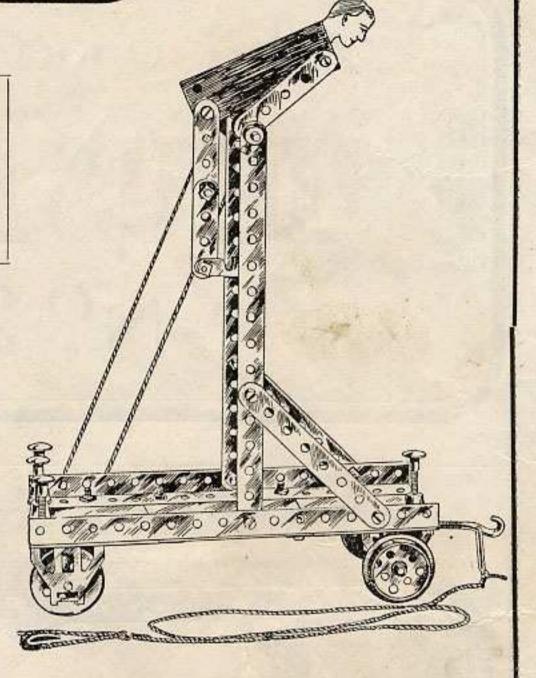



HORIZONTAL BAR PERFORMER No. 139.

	. 1	No.		No.
1	Slip	25	4 Trunnions	74
19	Screws	50	4 Wheels	75
2	Angle Bars, 8 in.	54	2 Axles, 31 in.	77
4	Strips, 2 in.	56	1 Axle, 23	.78
2	$\frac{1}{1}$, $\frac{2\frac{1}{2}}{2}$,	57	2 Collars	82
2		60	4 Buffers	85
2	,, 8 ,,	63	1 Coupling	86
1	Bracket	66	2 Catches	95
3	Plates, 3×3	68		

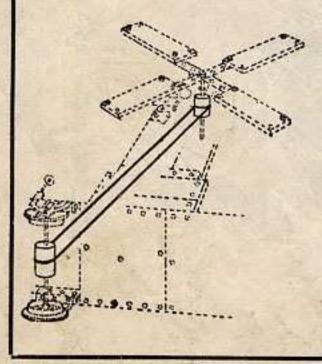


Note.—These models are mounted on trolleys and when pulled along the figures perform. This is effected by a simple belt system, using cotton reels, fully explained by the small drawings. The head of the man is cut from card and inserted in a slit cut in the No. 25 wood slip.

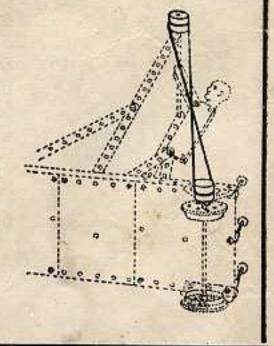

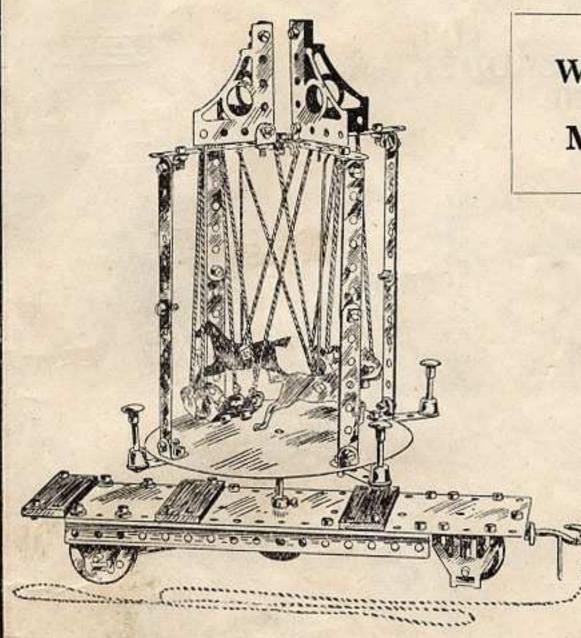

ROUNDABOUT No. 135.

	1	No.		No.
3	Slips	25	3 Plates, 3×3 in.	68
64	Screws	50	4 Trunnions	74
2	Angle Bars, 8 in.	54	4 Wheels	75
8	Strips, 2 in.	56	2 Axles, 3½ in.	77
8	,, 3½ ,,	59	1 Axle, 23 ,,	78
2		62	1 Collar	82
2	,, 8 ,,	63	4 Washers	84
4	Architraves	65	4 Buffers	85
16	Brackets	66	1 Coupling	86

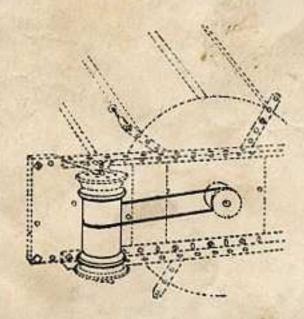


When drawn along this model works. Illustration shows the simple means used—two cotton reels and a band of cord. A disc should be cut from cardboard to form the base of the roundabout and the horses can be sketched and cut from card.

WORKING MODELS.

DANCING NIGGER No. 141.

		No.
4	Slips	25
	Screws	50
	Angle Bars	53
	Strips, 2 in.	56
4	21	57
5	., 31	59
2	., 4 ,,	60
1	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	62
4	Architraves	65
5	Brackets	66
	Plates, 3 × 3 in.	68
	Hinges	72
	Trunnions	74
4	The state of the s	75
2	Axles, 3½ in.	77
1	Axle, 23,	78
	Washers	84
-	Buffers	85
	Wood Screws	97

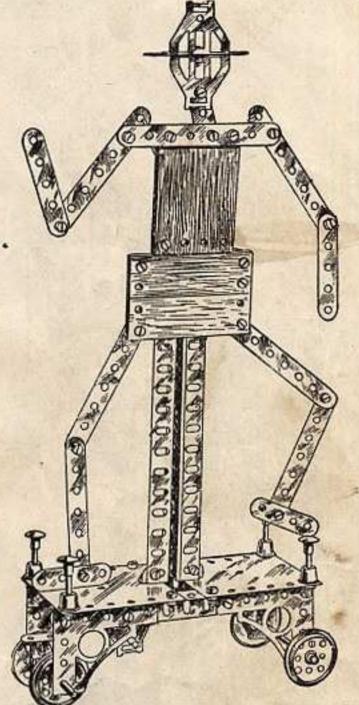


CONSTRUCTION of WORKING PARTS.


1. A 6½-in. strip is curved and bent at one end. Two brackets are attached to form a bearing for the axle, which is supported in the frame by two trunnions.

 A bracket is attached to one of the back wheels, which as it revolves strikes the curved strip, giving an intermittent movement.

3. Cord is attached to the curved strip, also the legs and arms of the dancer, as shown.

4. As the bracket strikes the curved strip so the cord jerks the arms and legs of the figure.

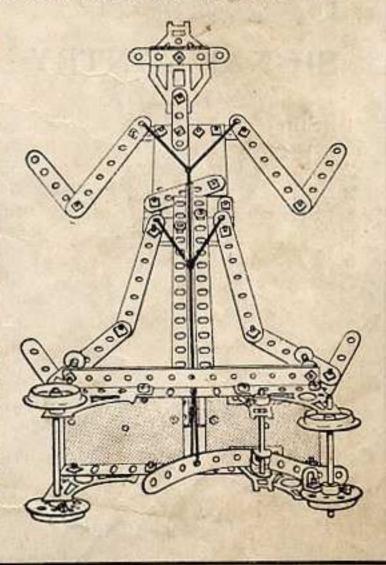

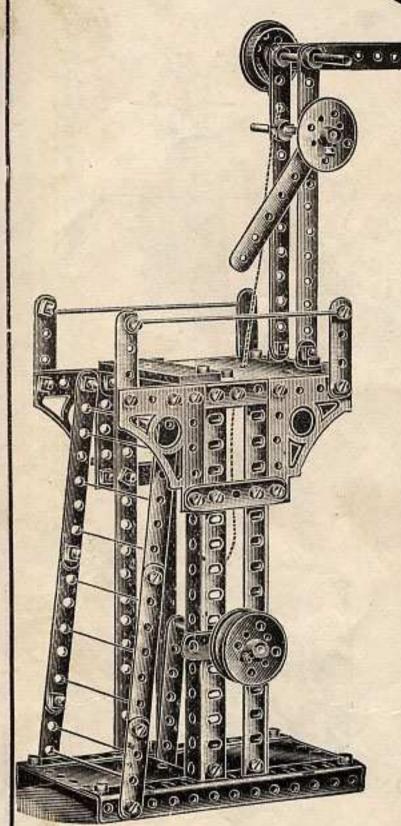


SIGNAL GANTRY No. 118.


1	Slip		100	No.	25
55				4.1	50
2	Bars, 61 in.	****	+ +	2.5	53
2	,, 8 ,,	• •			54
8	Strips, 2 in.				56
5	$\frac{1}{1}$, $\frac{21}{2}$,			10	57
5	,, 3½ ,,		4:14	11	59
2	,, 4 ,,		200	200	60
2	$,, 6\frac{1}{2},$		274	14	62
2	,, 8 ,,				63
4	Architraves		100	.,,	65
11	Brackets		* 10.0	19.40	66
3	DI I	•	t t		68
4	Wheels		#30#3	100	75
1	Rod, 31 in.				77
2	Rods, 24 ,,			41	78
4	Collars		+ 40	WY.	82
2	Rods	100		**	96
-25	Use cord for l				

EXTENDING LADDER No. 130.

2	Slips			No.	25
53	Screws		110.00	13	50
2	Bars, 61 in.			1000	53
2	8	102	3.1	17.	54
4	CONTRACTOR SECTION	10.0		*,*	
	Strips, 2 in	***		7.9	56
6	", $2\frac{1}{2}$ ",	17.5	39 65	99	57
5	$3\frac{1}{2}$	100		11	59
2	,, 4 ,.	****	4.45	**	60
2	,, 8 ,,	100	VE 10	7.	63
2	Architraves				65
16	Brackets		William .	12	66
1	Hinge			17	
- 72				2.2	72
4	Wheels		95056	10	75
1	Axle, $3\frac{1}{2}$ in		*1961	7.1	77
1	,, 23 ,.		10000	- 6	78
3	Collars				82
12	Washers		15, 150,		84
1	Catch	10.00	1.0.	(0)	95
2	Rods	(4)*(3.000	***	
-		and the		11	96
45	Extra par	rts re	quired.		1994
1	Wheel			44	76
1	Handle	14:48	***	,,	83

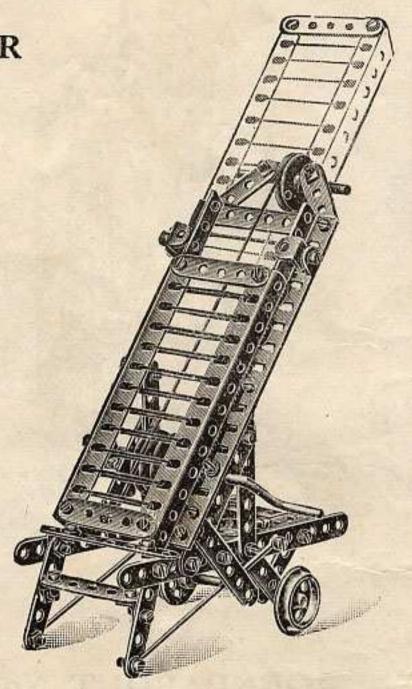


REVOLVING CHAIR No. 216.

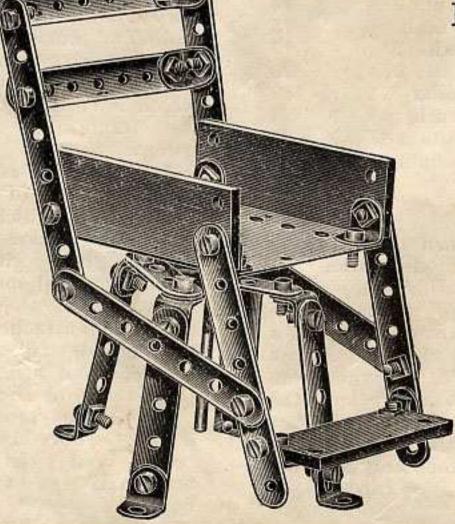


3	Wood slips		No.	25	
36	Screws	* *	Service Service	50	
1	Strips, 2 in.		11	56	
6	,, 2½,		- 11	57	
6	,, $3\frac{1}{2}$,,		SV	59	
2	,, 4 ,,		144	60	
16	Brackets			66	
1	Plate, 3 × 3 in.			68	
1	Wheel	1402	.,	75	
1	Axle, 23 in.		11	78	
2	Collars			82	
			100		

MOTOR VAN No. 132.

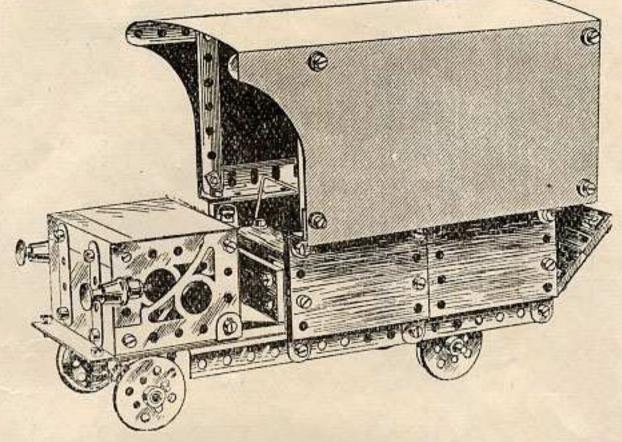


13	Slips No.	25	3	Plates, 3 × 3 in.	No	.68
58	Screws	50	2	Hinges	199	72
2	Angle Bars, 61 in.	53	4	Trunnions	100	74
2	0	54	4	Wheels	11	75
6	Strips, 2 in. ,	56	2	Axles, 3½ in.	,,	77
6	Committee of the commit	57	2	,, 24 ,,	11	78
4	$\frac{1}{3}$, $\frac{25}{3}$, $\frac{1}{3}$	59	3	Collars		82
2		63	8	Washers	,,	84
4	,, 8 ,, ,, Architraves ,,	65	COMPANY.	Buffers	25	85
10	Brackets ,,	66	1	Rod		96

TRAMCAR No. 133.

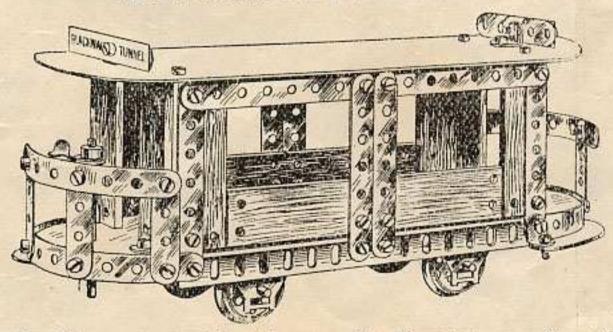

			43							
12	Slips		No.	25		14	Bracket	S	No.	66
66	Screws	-		50		3	Plates,	3×3 ir		68
2	Angle I	Bars, 8	in.	54		4	Trunnio	ors		74
6	Strips,	2 in.	37	56		4	Wheels		11	75
6 2 8	,,,	21 ,,	1)	57		2	Axles,	3½ in.	316	77
8	,,,	$3\frac{1}{2}$,,	- 11	59		2	.,	23	- 11	78
	,,	4 ,,		60		4	Collars		,,,	82
2 2 2	,,	61 ,,	44	62		8	Washer	s	,,	84
2	,,	8 ,,	111	63						
	Cardboa	ard is	used	for	roof,	pla	tforms, a	and st	eps.	

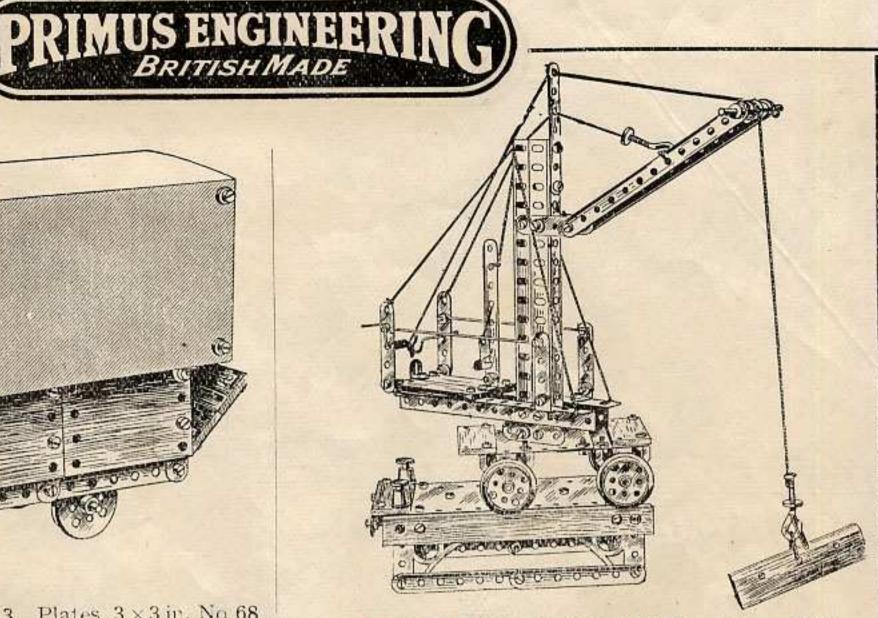


TRAVELLING CRANE No. 134.


-	FATT A TITLE	TIO CITETA		
	No.		No.	No.
2	Rails 1	4 Strips,	4	Wheels 75
	Buffer 4	2½ in.	57 2	Axles, 3\frac{1}{2}\in 77
	Slips 25	6 ,, $3\frac{1}{2}$,,	59 1	,, 23 ,, 78
	Screws 50	2 ,, 4 ,,	60 3	Collars 82
	Angle Bars,	$2 , 6^{1}_{2} ,$	62 1	Washer 84
	61 in. 53	4 Architrav	res 4	
2	,, 8 ,, 54		65 2	Couplings 86
	Strips	16 Brackets	66 -1	
	2 in. 56	3 Plates,	1	Rod 96
		3 × 3 in	68	

3×3 in. 68 A piece of wire bent for crank handle.

MECHANICAL HAMMER No. 108.

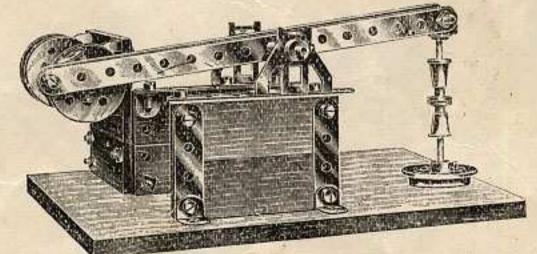


	Value of the last						+	
7	Slips, 3	\times 3 m .	No	.25	4	Trunnions	No.	74
	Screws			3672	4	Wheels	***	75
	Strips,				2	Axles, 31 in.	110	77
	,,				4	Collars		82
2	22	31	-	59	8	Washers	11	84
2		8 .,			2	Buffers	11	85
	Bracke			66	6	Screws	111	97
		mode	1 0	in be	worked	l by a moto	r.	

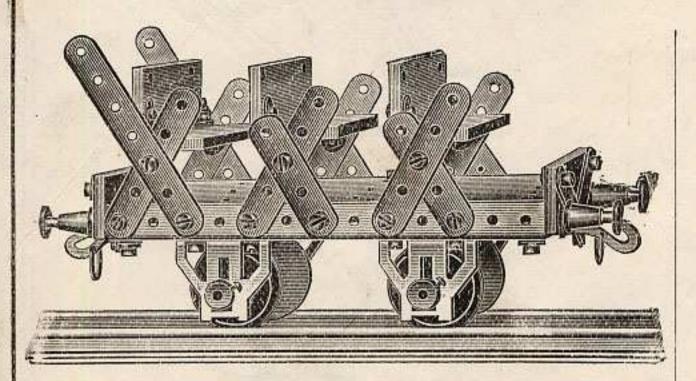


SWITCHBACK CAR No. 115.

8	Slips		No.	25	4	Trunnions		No.	74
50	Screws))	50	4	Wheels		1)	75
2	Bars, 61 i	n	***	53	2	Axles, 3½ in			77
8	Strips, 2		11	56	4	Collars			82
6	,, 21	·	199	57.	12	Washers	* *		84
2	,, 31	,,	***	59	4	Buffers		,,	85
16	Brackets	12.3	- 11	66	2	Couplings		"	86
3	Plates, 3	×3 in.	,,	68				10,000	
N			rs p	laced	OV	er screw th	at s	secure	S
				ckets					

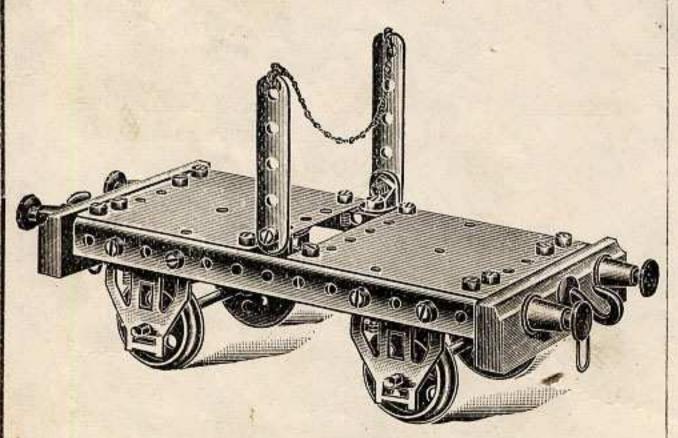


TIMBER TRUCK No. 123.

2	Blocks	 No.	4	2	Plates, 3×3 in.	No.	68
32	Screws	 ,,	50	4	Trunnions	.,,	74
2	Bars, 6½ in.	 .,,	53	4	Wheels		75
2	Strips, 2 in.	***	56	2	Axles, 31 in		77
2	,, 21 ,,	 .,,	57	4	Buffers		85
12	Brackets	 ,,	66	2	Couplings		86

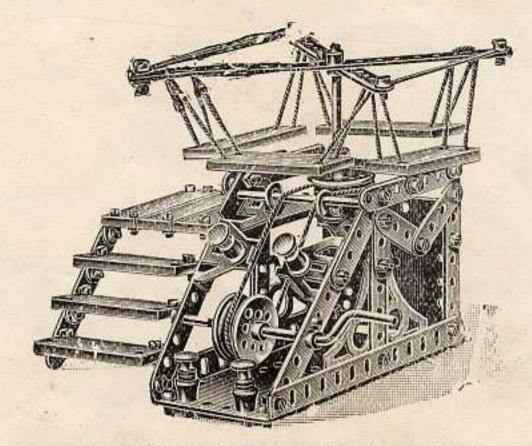


ROUNDABOUT No. 129.


			No.				No.
11	Slips		25	16	Brackets	100000	66
61	Screws		50	3	Plates, 3×3 in	1.	68
2	Bars, $6\frac{1}{2}$ in.		53	4	Trunnions		74
5	Strips, 2 in.		56	4	Wheels	1.	75
5	',, $2\frac{1}{2}$ ',	****	57	2	Axles, $3\frac{1}{2}$ in.	*:(*)	77
8	", $3\frac{1}{2}$ ",		59	4	Collars	1.000	82
2	,, 4 ,,		60	10	Washers		84
2 2 4	,, 8 ,,		63	4	Buffers		85
4	Architraves		65	2	Rods		96

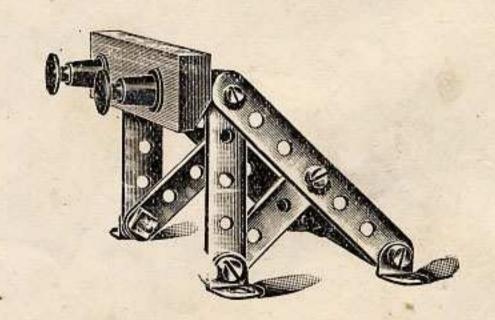

BUFFER END No. 100.


1	Block	***		**		*.*	No.
10	Screws	504	97.9	24	- 1473		- 11
2	The second secon	in.	\$00 C	\$194.E		* *	**
3	$\frac{1}{2}$,,	**	114.14			**
2		,,	1.2	- 12		177	,,
8	Brackets						11
2	Buffers			1 200			,,

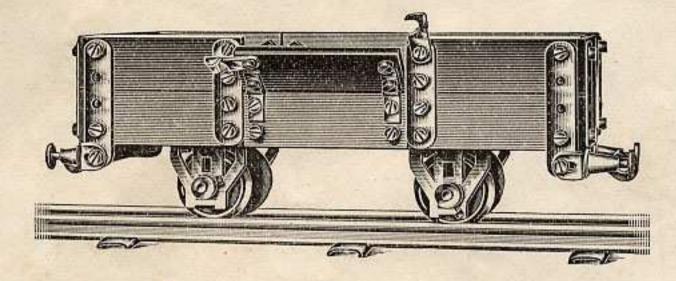

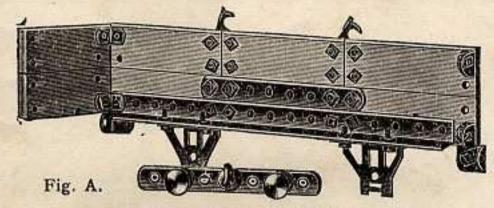

DIAGRAMS TO SHOW.

- (a) How the sides are fitted up.
- (b) How the end is formed.

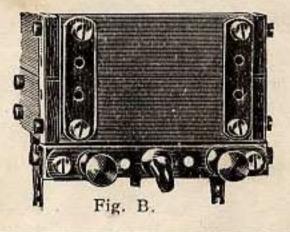

COAL TRUCK No. 113.


16	Slips		No.	25
64	Screws	04/14/1	,,	50
2	Bars, 8 in.		,,	54
8	Strips, 2 in.	-	,,,	56
4	", $2\frac{1}{3}$ ",		100	57
2	$3\frac{1}{2}$,			59
2	,, 4. ,,		"	60
12	Brackets	-	22	66
3	Plates		"	68
4	Hinges			72
4	Trunnions		**	74
4	Wheels	2026	2.3	75
2	Axles, 3½ in.	030	**	77
4	Collars		"	82
4	Washers		11	84
4			"	85
2		• •	"	
	Couplings	1000	9.5	86
4	Catches	62.31	**	95


HEAVY GOODS TRUCK No. 116.


ALL WOOD SIDES, ENDS AND BUFFER BLOCKS.

	HARRIST AND ADMINISTRATION OF THE PARTY OF T	William Colors to Constitute	1 1 3 1 1 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m		
4	Rails			No.	1
2	Blocks			,,	4
1	Floor	2042043		,,	9
2	Sides	1000	10E.	,,	17
2	Ends	Te la		,,	18
36	Screws			,,	50
2	Bars, 6½ in.	2000		,,	53
4	Strips, 2 in.			,,	56
3	,, 2½ ,,	***		,,,	57
2	$6\frac{1}{2}$	(4)4		,,	62
10	Brackets			,,	66
4	Trunnions			,,	74
4	Wheels			,,	75
2	Axles, 23 in.		(12.54)	,,	78
4	Collars	N4600	DE N	,,	82
4	Washers		Trans.	,,	84
4	Buffers			,,	85
2	Couplings		200	"	86
75		126122		.,	100


Diagram showing how the frame is made up. The floor has two brackets as shown, and is then placed inside brackets down, and secured by means of the coupling hooks.

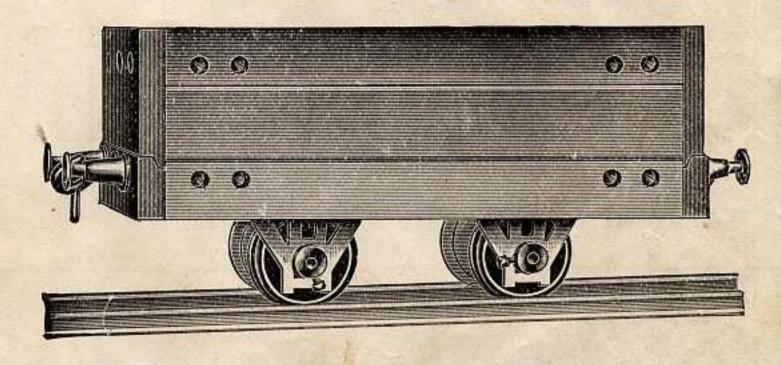

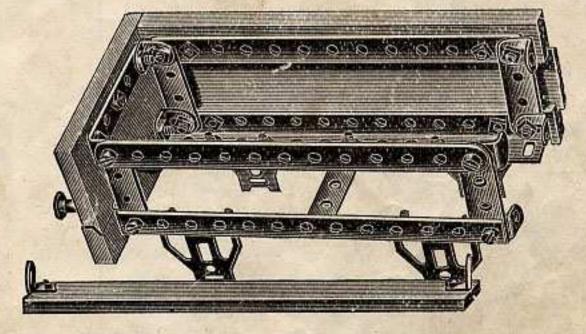


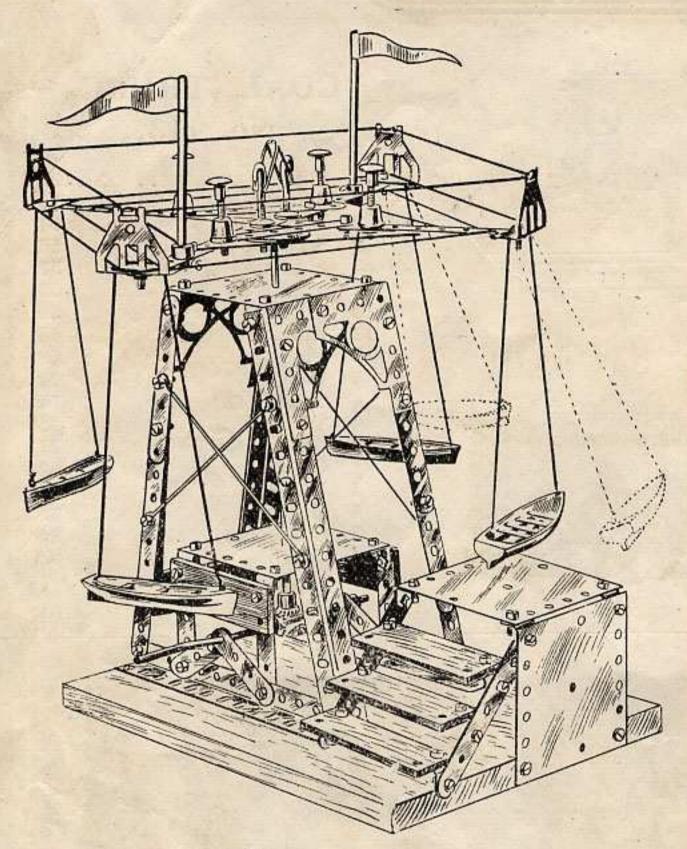



H. MAXIM'S FLYING MACHINE

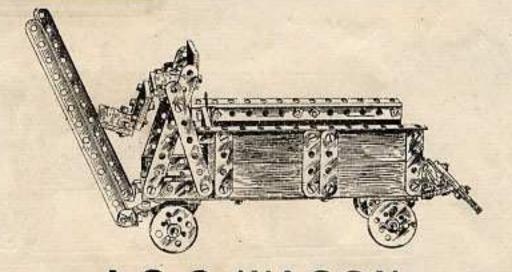

A.S. C. WAGON

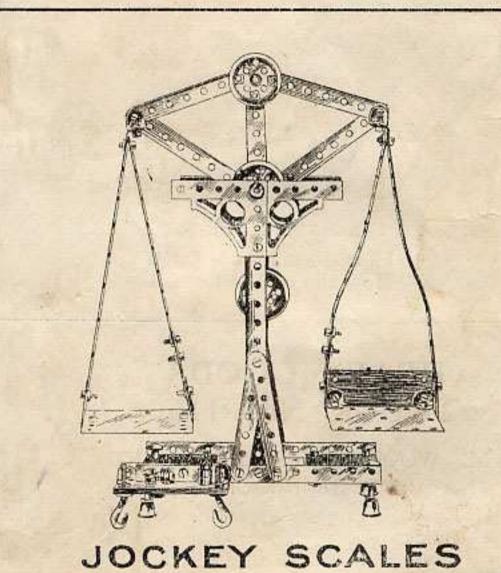

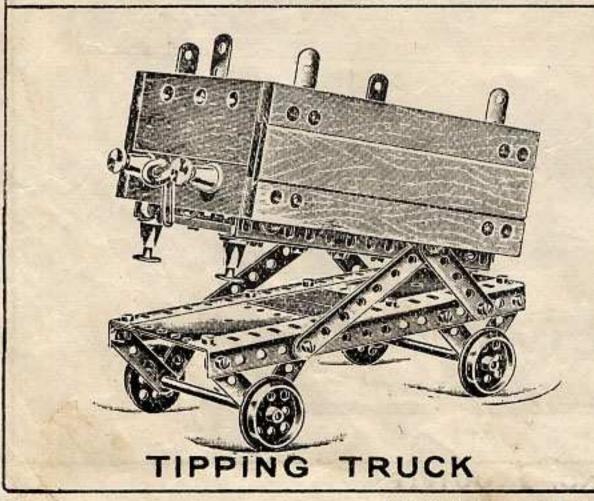

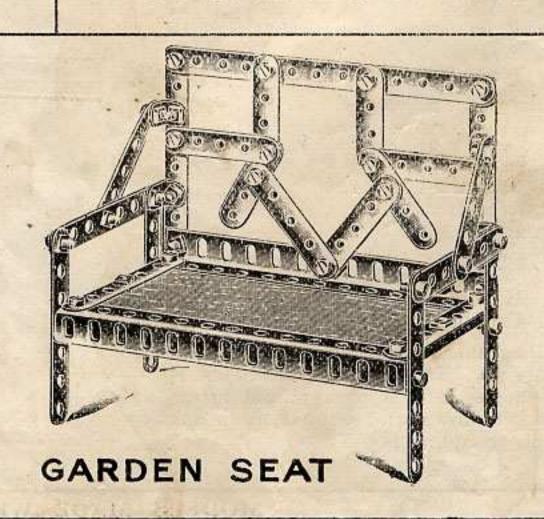


These models are made with


PRIMUS ENGINEERING

Nº3 outfit

BOXERS IN RING No. 204.

A clever working model of two pugilists who actually box.

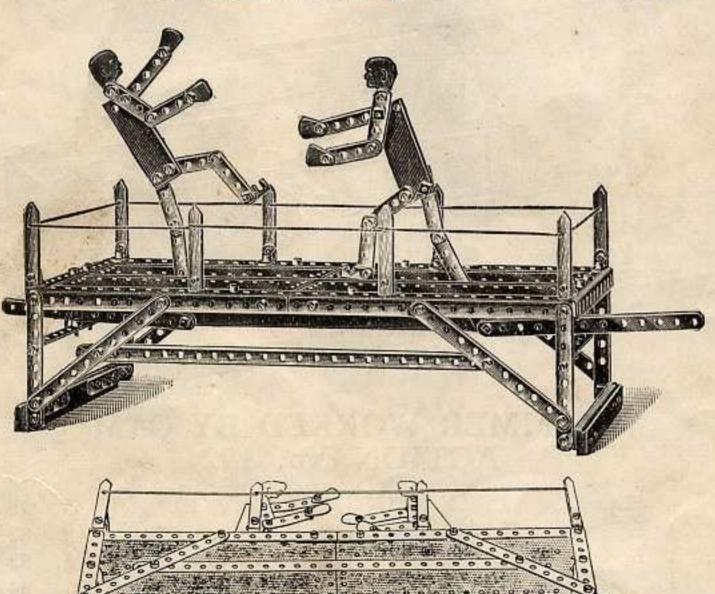


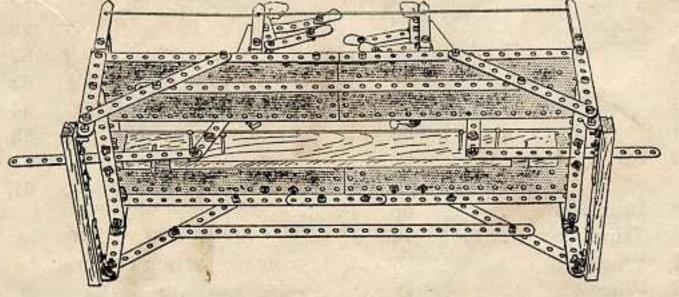

2	Grooved side rails		No.	1
8	Posts for railings		,,	11
1	Plain platform plank		"	23
2	Wood slips	-15	"	25
85	Screws		,,	50
2	Angle bars, 6½ in.	***	"	53
4	,, 8 ,,		,,	54
10	Strips, 2 in		"	56
6	$\frac{1}{1}$, $\frac{1}{2}$,		"	57
4	$\frac{7}{1}$ $\frac{3\frac{1}{2}}{2}$ $\frac{7}{1}$,,,	59
4	,, 4 ,,		,,	60
4	$\frac{7}{1}$, $5\frac{1}{2}$,		1)	61
4	$,, 6\frac{1}{2},, \dots$	100	,,	62
2	$12\frac{1}{2}$.,,	64
16	Brackets	1.00	,,,	66
4	Plates, 8×3		,,	67
2	Trunnions		,,	74
6	Washers		,,	84
4	Catches		,,	95
2	Wood screws		"	97
Share .			100	

Heads and boxing gloves can be cut out of cardboard.


The system of operating the boxers is clearly shown in the diagram. Note that it is advisable to use small nails to act as stops to prevent the figures assuming unnatural positions.

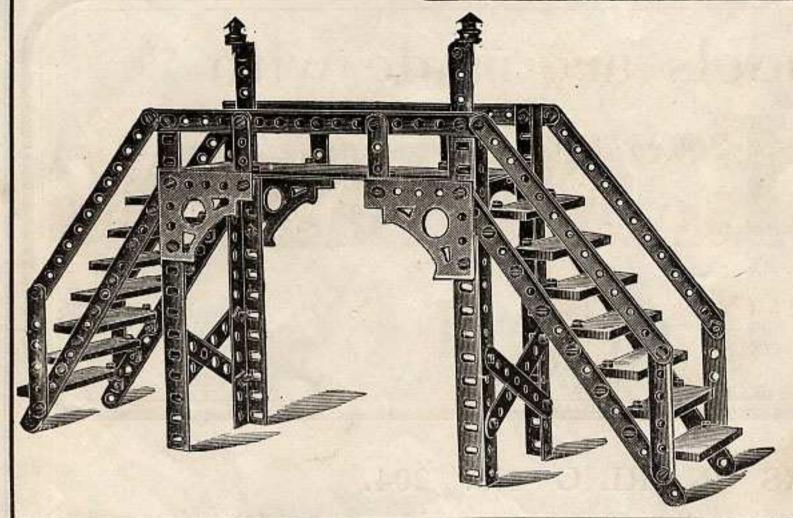

HIGH LEVEL BRIDGE No. 185.


14	Slips		******	No.	25
98	Screws			"	50
4	Angle bars, 8 in	1.		,,	54
6	Strips, 2 in.			,,	56
4	,, 3 ,,				58
4	,, 3½ ,,			,,	59
4	$,, 5\frac{1}{2},$,,	61
4	$,, 6\frac{1}{2},$	84.40		,,	62
4	,, 8 ,,			,,	63
4	Architraves			,,	65
38	Brackets			,,	66
1	Plate, 8 × 3 in.			,,	67
2	Lamps			,,	87
	44 (44)	5.5			THE STATE OF THE S

The side rails of bridge are composed of two 5½-in. strips, bolted together.

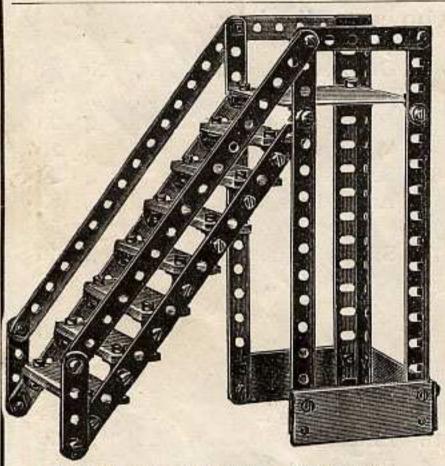

STAIRCASE WITH LANDING No. 186.

10	Slips				No.	25
50	Screws				- ,,	50
2	Angle b	ars, 8 in.			,,	54
2	Strips,				,,	56
2	***	3 ,,			**	58
6	_ ,,	8 ,,			"	63
18	Bracket				**	66
1	Plate, 3				**	68
The	bracket	ts fit to	the	front	holes	of
the	No. 25	slips.				
		put ove alplate i				

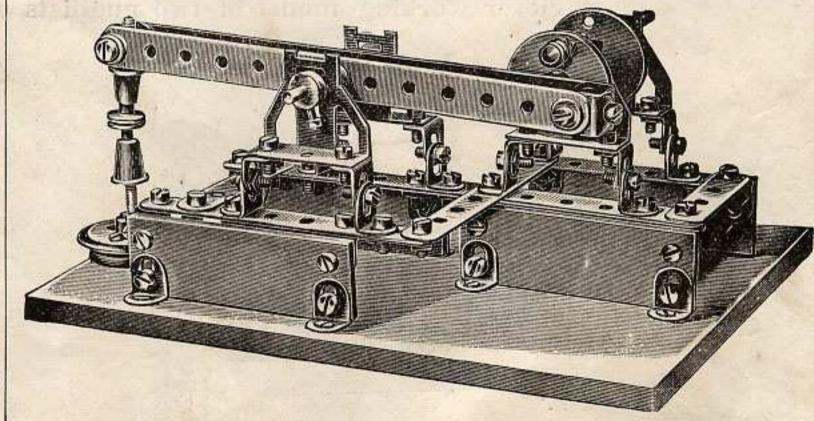

HAMMER WORKED BY CAM ACTION No. 192.


4	Slips		No.	25
54	Screws .		,,	50
1	Strip, 2 in.		***	56
1	,, 21/2 ,,		,,	57
1	,, 3 ,,		,,	58
2	Strips, 4 in.		,,	60
3	$,, 6\frac{1}{2},,$,,	62
28	Brackets		,,	66
4	Trunnions		**	74
1	Wheel	100	,,	75
2	Wheels	*0.0	"	76

Axle, 23 in.			No.	78
Collars		11	,,	82
Handle			,,	83
Washers			,,	84
Buffers			**	85
Knob screw			,,	92
Wood screws			**	97
	Collars Handle Washers Buffers Knob screw	Collars . Handle . Washers . Buffers . Knob screw .	Collars Handle Washers Buffers	Collars, Handle, Washers, Buffers, Knob screw,

The knob screw for the eccentric action should be double nutted into the wheel.




SIDE STATION No. 180.

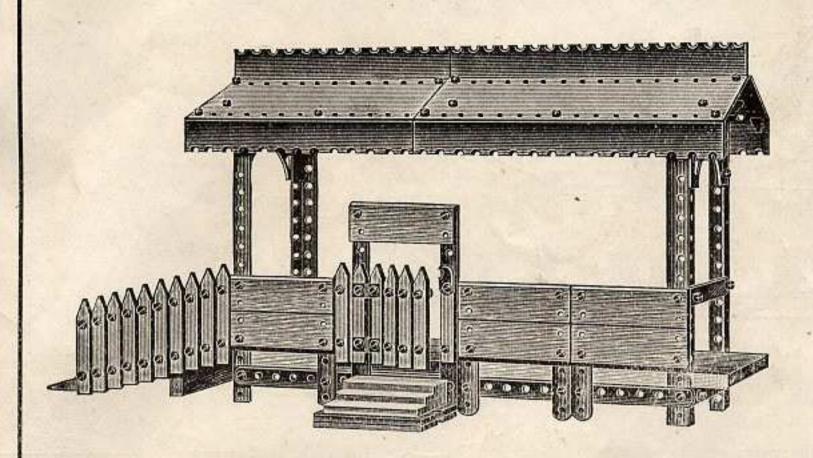


		1000	THE CONTROL OF THE		
16	Posts		1000	No. 11	
1	Step			,, 21	
1	Slope			,, 22	
3	Platforms		****	,, 23	
7	Slips	*.*	(*6*6	,, 25	
88	Screws	1.000	* *	,, 50	
4	Angle bars, 8 in.	. * .		,, 54	
4	Strips, 2 in.		1.04.40	,, 56	
6	", $2\frac{1}{2}$ ",	12.4		,, 57	
4	$3\frac{1}{2}$,,	2.4	10 10	,, 59	
3	,, 4, ,,			,, 60	
4 3	$5\frac{1}{2}$,	* * *		,, 61	
7	,, $12\frac{1}{2}$,,	0.000	100	,, 64	
4	Brackets	-55		,, 66	
1	Plates 8 × 3 in.	155		,, 67 69	
1	Tile, $6\frac{1}{2}$ in	12. 12	***	70	
4	,, 8 ,,		24.04	771	
2	Eaves, 8 in. Hinges			70	
1	0-1-1			05	
4	Catch	1000		,, 90	

COMPOSITION OF ROOF FRAME.

- 1. Study this diagram carefully and note how the brackets are put on—this is important.
- 2. The whole roof, with ridge tiles and eaves, should be bolted up before it is fitted on the framework.





ASCOT?

ISLAND STATION No. 183.


-~			100			
1	Post	46		- 14/4/	No.	11
4	Platform sides	***		4.	,, 1	23
7	Slips	• •			4.4	25
72	Screws		5000		0.5	50
4	Angle Bars, 8:	in.				54
6	Strips, $2\frac{1}{2}$ in.	***	***	18.81	47	57
4	,, 4 ,,			111111111111111111111111111111111111111		60
4	$,, 5\frac{1}{2},$			***	**	51
3	$12\frac{1}{2}$,,			16.4		64
4	Architraves	a sale	2000	+ 4	7.5	35
22	Brackets				44	66
4	Plates, 8×3 in.					57
1	Tile, $6\frac{1}{2}$ in.	3.0			2.5	69
1	_,, 8 ,,	***	1.5.5		"	70
4	Eaves, 8 in.	* *	50.00	**		71
2	Lamps		18080	**	,, }	37
	The second secon					


HOW TO FIT ON THE ROOF.

The 12½ inch strip below the platform must be fitted between the angle bars.

Note position of brackets for securing roof to frame.

The name of station can be painted on a wood slip to suit locality.

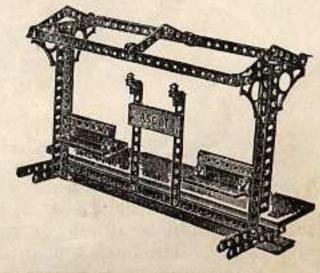

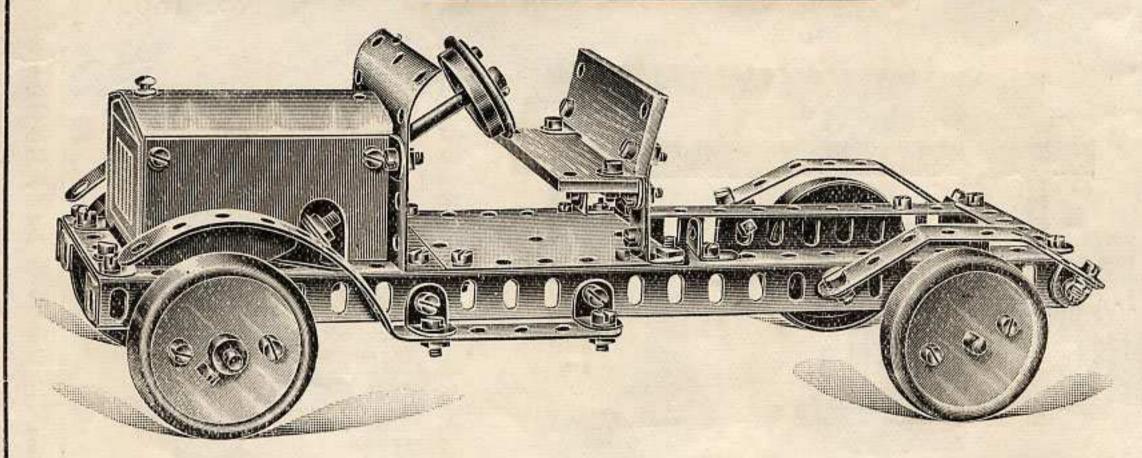

мото

PARTS FROM


					No.
2	Slips				25
71	Screws	0			50
2	Strips,	2	in.		56
4	,,	2	,,		57
1	Strip,	3	,,		58
2	Strips,	4	,,	-	60
2		6			62
2	.,	8	,,,		63
22	Bracke	ts			66
3	Plates,	3>	(3		68
					43.000

The wheels are const box lids (powder boxes a No. 68 3 x 3 plate for the is also made by bending a

MOTOR-CAR BUILDING With PRIMUS.

A motor-car is perhaps the most interesting and instructive Model that can be built, and this can easily be done by anyone who has become acquainted with the possibilities of Primus Engineering.

The models illustrated were constructed by a lad of thirteen years, following the method adopted in building real cars—first, the chassis (to which any body can be attached); then as standard types, the W. D. Lorry and a smart coupé. These will give any young engineer the idea; and, having constructed the chassis, he will find it quite a simple matter to erect thereon bodies of any description.

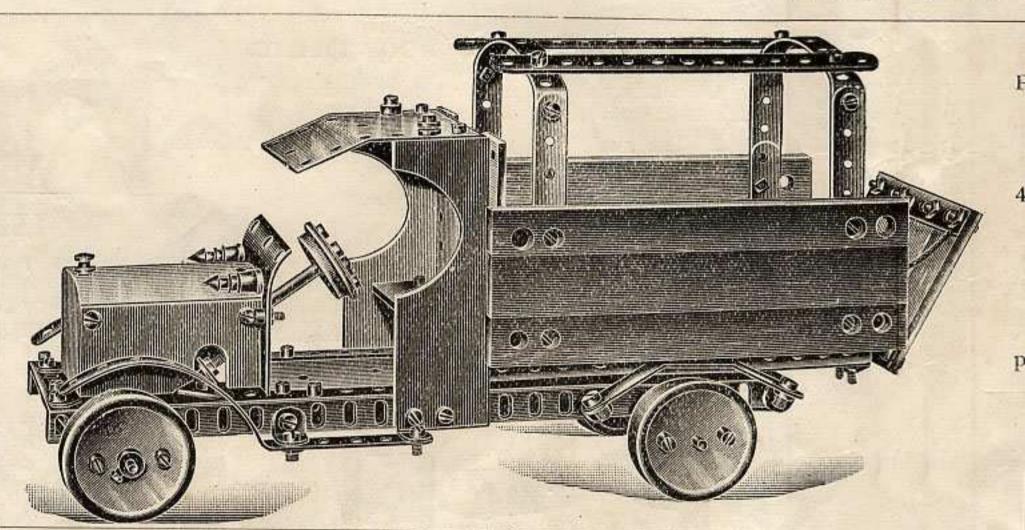

TOURING COUPE. No. 211.

							Par I		
	ARTS TO MAKE Wood Slips		Bod No.		Е	XTRA PARTS R	EQUIRI	ED.	
					11 (1 - 1)		PER STANCE OF THE PARTY.		
	Screws		,,,	50 .	. 8	Hinges		No.	68
12	Brackets	-	- 21	66	2	Door Handles			
		100	11	00	-	Door Trandles	1.50	"	88
2	Plates, 8 × 3		11	67	2	Turnbuttons		,,	89
4	Hinges			72		Screws		880 5	
	The state of the s		11	14		ociews		"	91
2	Lamps	100	1000	87					

Remove from chassis back mudguards and 3 × 3 plates in the floor, fix 8 × 3 plate to form whole floor, replace seat. The sides and doors of coupé are cut from cardboard, the opposite side being without doors. The top and back is formed out of one 8 × 3 plate; the boot is fixed to the frame by means of brackets.

The back seat in the closed body is fitted to the 8 × 3 plate forming the top and back by two brackets. This should be done before the sides are fitted on.

The back seat in the boot is fitted to the wood slips forming the sides by brackets, the wood slip at back being secured to the base.




MOTOR-CAR CHASSIS. No. 209.

PARTS FROM No. 3 OUTFIT.

tre-	98385 Y		No.				No.	EXTRA PARTS REQUIRED.
2	Slips .		25	2	Trunnions		74	
1			50	1	Wheel		75	No.
2	Strips, 2 in.		56	4	Wheels		76	2 Angle Bars, 12 in. 55
4	,, 2 ,,		57		Axle Rod, 31	in.	77	1 Collar 82
1	Strip, 3 ,,		58	1	,, 11/2		79	1 15-in. Cog 160
	Strips, 4 ,,			8	Collars		82	1 Bevel Gear 162 1 Axle, 6 in 165
2	,, 6 ,,	75.4	62	12	Washers		84	The state of the s
2	,, 8 ,,	1/250	63	4	Buffers		85	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7
2	Brackets	1/2	66	1	Knob Screw		92	1 Collar 168
3	Plates, 3 × 3		68					

The wheels are constructed with No. 76 pulleys, to which are bolted small tin ox lids (powder boxes about 2 in. diameter). The bonnet is made by bending a No. 68 3 × 3 plate for the top and using cardboard for the front and sides. The dash also made by bending a No. 68 3 × 3 plate.

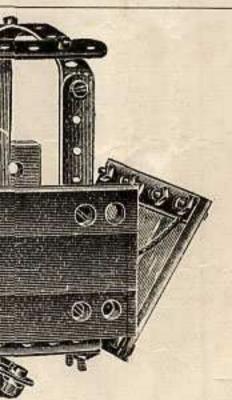


W. D. WAGON. No. 210.

PA	RTS FROM No. 3 OU	TFIT	TO MA	KE TH	E Bor	Y.	No.
		No.	2	Strips,	$5\frac{1}{2}$ in.		61
4	Grooved Rails	1	2	17	$6\frac{1}{2}$,,		62
2	Truck Sides	17	2	3)	8 ,,	**	63
6	Wood Slips	25	4	Bracke			66
49		50	1	Plate, 8	3×3		67
2	Angle Bars, 6½ in.	53	2	Hinges			72
4	Strips, 2 in	56	2	Lamps			87
2	$,, 2\frac{1}{2},, \ldots$	57	ExT	RA PAR	TS RE	QUIE	ED.
4	$3\frac{1}{2}$,	59	2	Angle :	Bars,	32 in.	53
1	Strip, 4 ,,	60	1	Strip,	2 in.		57
	The delicate and	F		bre bon	ding	011	242


The driver's seat is made by bending an 8×3 plate thus:—

00000



Cut the sides out of cardboard.


The body overlaps the wheels and is fitted as sketch, using two $6\frac{1}{2}$ in. angle bars on each side.

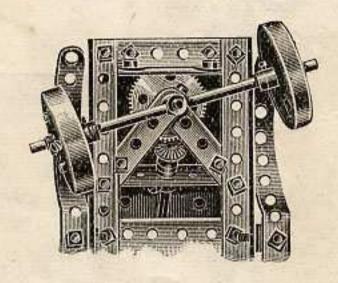

THE STEERING GEAR.

This must be built on to the frame before the bonnet is fitted.

- 1. Lay two 2½-in. metal strips at angles as shown, and secure.
- 2. Place a 2½-in. metal strip across the base of the triangle, and secure to brackets.
- 3. Fix No. 160 gear wheel to 1½-in. axle, and pass through the ends of the 2½ in. strips. Place washers on and secure with a double-tapped collar.
- 4. A 3½-in. axle is then used for the steering pillar, which is passed through the centre hole of the dash plate and the 2½-in. metal strip.
- 5. Secure with a collar, and use washers to adjust the bevel gear so that it engages in the large cog.
- 6. Fix the wheels to 2\frac{3}{4}-in. tapped axles and screw into the double-tapped collar.

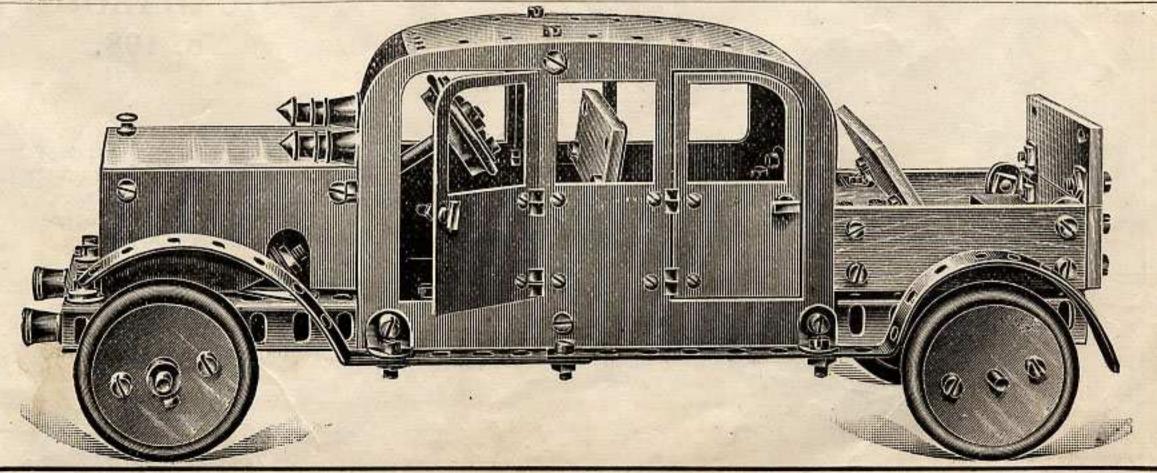


replace seat. op and back

ckets. This

back being





MOTOR TRANSPORT WAGON No. 202.

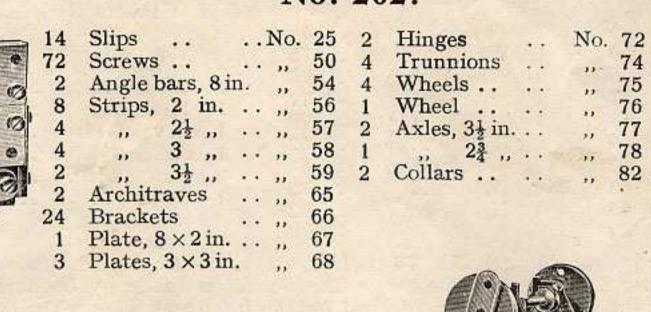

			2					
	-13-	FAIL .	DEP-1	No.	No. of	A STATE OF THE PARTY OF THE PAR	- 8	No.
8	Slips			25	1	Wheel		75
54	Screws			50		Wheels		76
2	Strips,	2	in.	56	1	Axle, 23 in.		78
2	33	21/2	,,	57		Collars		82
2	,,	3	,,	58	1	Handle		83
4	,,	51	**	61	10	Washers		84
3	,,	$6\frac{1}{2}$,,	62	2	Buffers		85
30	Bracket	S		66	2	Knob screv	VS	92
4	Trunnic	ns		74	8	Wood screv	vs	97
220					War all			

FITTING CRANK ARM.—A knob screw should be bolted, through the pulley wheel, then a washer put on, then the crank arm and another washer, and lastly double nutted, It should be fitted to the beam in a similar manner. The table below shafting is supported on 2-in. strips, which cannot be seen in the illustration.

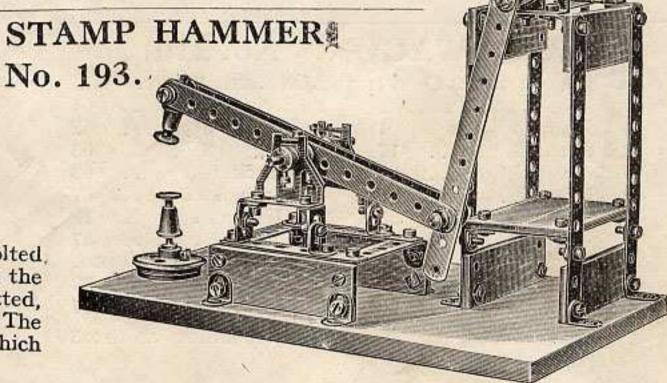

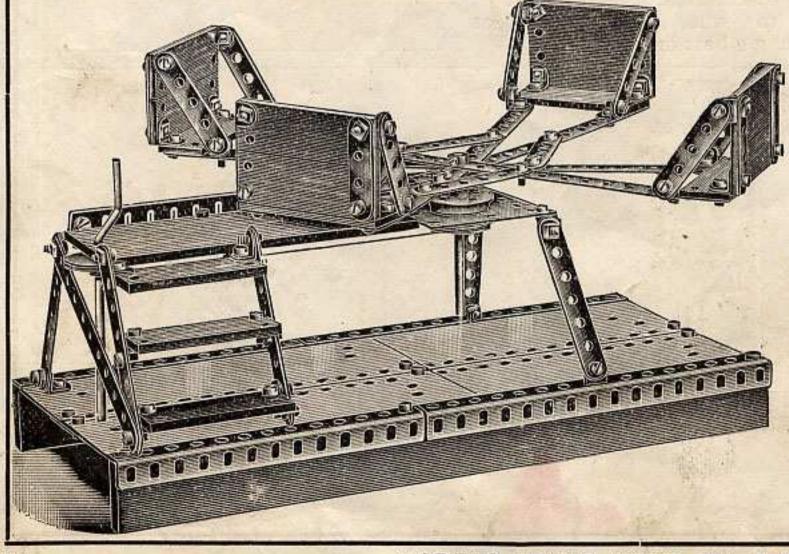


ROUNDABOUT No. 198.


		14			6000
			No.	1	Vo.
1	Floor		9	1 Strip, 8 in.	63
	Platfor	ms	23	3 Strips, 12 ,,	64
15	Slips		25	38 Brackets	66
95	Screws		.50	4 Plates, 8 × 3 in.	67
2	Angle	bars,		1 Plate, 3×3 in.	68
	24	6½ in.	53	1 Wheel	75
3	,,	8 ,,	54	3 Wheels	76
8	Strips,	2 in.	56	1 Axle, 3½ in.	77
8	,,	$2\frac{1}{2}$,,	57	1 Collar	82
4	11	3 ,,	58	1 Handle	83
4		31 ,,	59	2 Washers	84
2 3	22	4 ,,	60	6 Wood screws	97
3		51 ,,	61		




4	Side rails	No.	1	2	Plates, 8 × 3 in.	No.	67
6	Slips		25	3	,, 3×3 in.	,,	68
114	Screws		50	1	Tile, $6\frac{1}{2}$ in	,,	69
2	Angle bars,	6½ in. ,,	53	1	Hinge	***	72
4	201	8 ,, ,,	54	2	Trunnions	**	74
8	Strips, 2 in		56	1	Wheel	,,	76
	$\frac{1}{1}$, $\frac{2\frac{1}{2}}{2}$,		57	2	Axles, $3\frac{1}{2}$ in	.,	77
8 3 5 2	,, 3 ,,		58	4	Collars	,,	82
5	$3\frac{1}{2}$,		59	1	Handle	,,	83
2	,, 4 ,,		60	10	Washers	,,	84
4	$,, 5\frac{1}{2},$		61	2	Buffers	,,,	85
4 5	$,, 6\frac{1}{2},$		62	1	Coupling	"	86
5	,, 8 ,,		63	2	Lamps	,,	87
3	$12\frac{1}{2}$		64	1	Catch	**	95
4	Arthitraves	.,,	65	2	Rods	,,	96
32	Brackets	,,	66	2	Wood screws	**	97
		0.00					

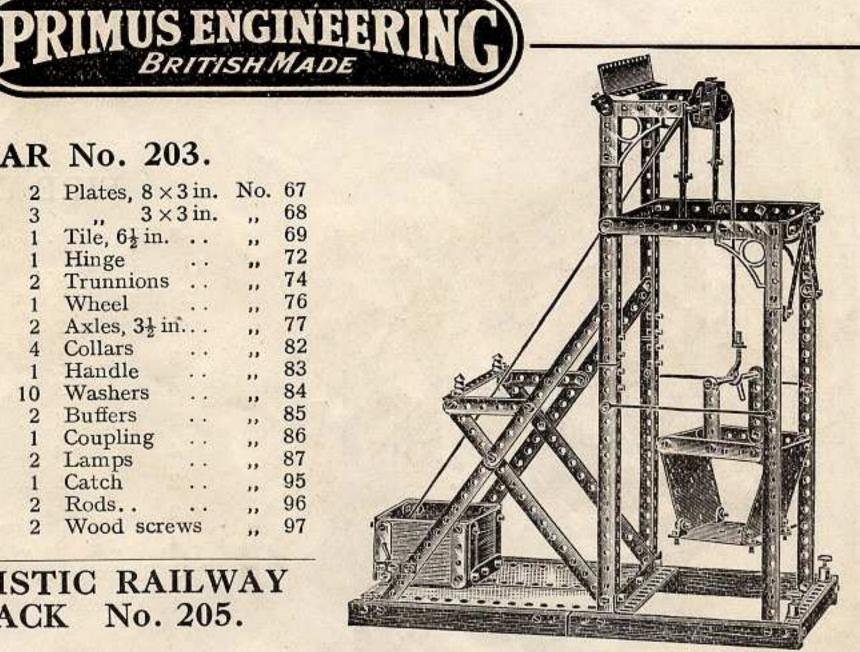

REALISTIC RAILWAY TRACK No. 205.



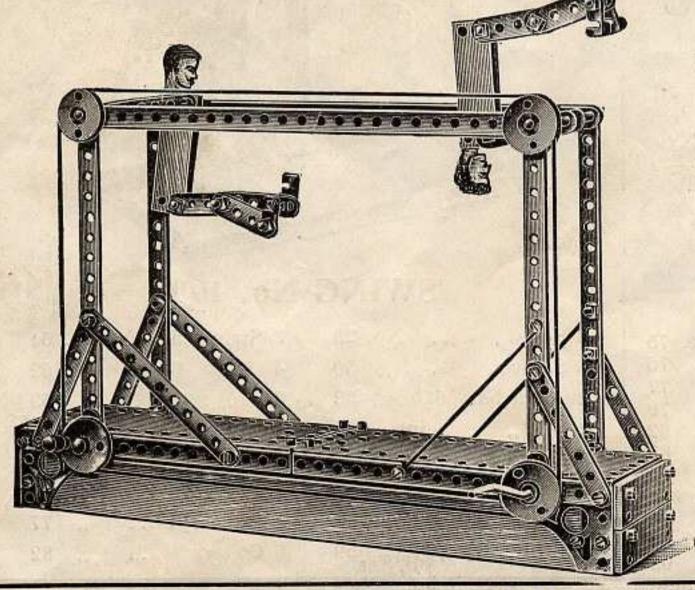


DOUBLE BAR PERFORMERS No. 206.

Shows how the rails are 'oined together.


		No.			No.
2	Platforms .	. 23	12	Brackets	66
6	Slips .	. 25	2	Plates, 8 × 3 in.	
53	Screws .	. 50	4	Wheels	76
4	Angle bars, 8	in.54	2	Axles, 3½ in.	77
8	Strips, 2 in	. 56	5	Collars	82
8 2 2 2	,, 2½ ,,	57	1	Handle	83
2	$3\frac{1}{2}$,	59	8	Washers	84
2	,, 4 ,,	60	.1	Lamp	87
	,, 5½,,	61	1	Knob	92
4	,, 8 ,,	63	4	Catches	95
2	$12\frac{1}{2}$, 64	2	Posts	96
4	Architraves	65	4	Wood screws	97
					I SANGE WAS TO

Heads of men cut from cardboard. A slit in wood should be made to wedge heads in.

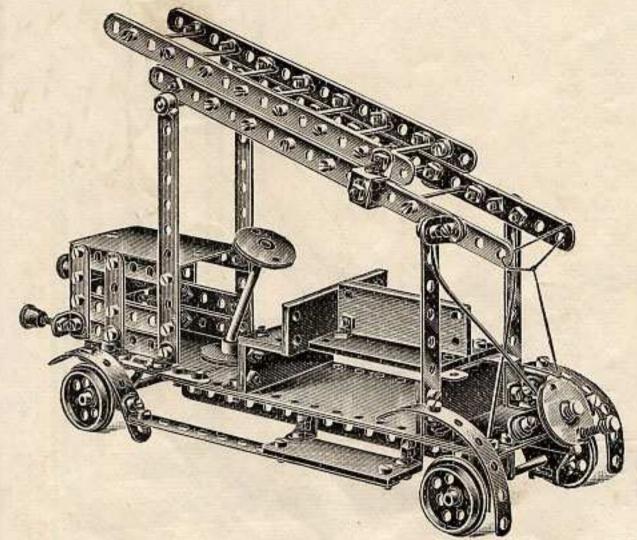


FIRE ESCAPE No. 207.

8	Slips			No.	25	2	Plates,	3×3 in.	No.	. 68	
118	Screws			**	50	4	Trunni	ons	"	74	
2 A	ngle Bar	rs, 8	Bin.	. ,,	54	4	Wheels		"	75	
10	Strips,	2	in.	***	56	3			,,	76	
3	,,	$2\frac{1}{2}$,,	,,	57	2	Axle R	ods, $3\frac{1}{2}$ i	n ,,	77	
6	.,	3	,,	11	58	5	Collars		,,	82	
2	,,	$3\frac{1}{2}$,,	,,	59	8	Washe	rs	,,	84	
4	,,	4	,,	.,	60	4	Buffers		,,	85	
2	- 27	$5\frac{1}{2}$	11	,,	61	2	Rods		,,	96	
2	. ,,	$6\frac{1}{2}$,,	33	62		Addition	nal Par	ts.		
4		8	**	.,,	63	14	Tie Ro	ds	No.	155	
35	Brackets	3 .		**	66	2	Strips,	3 in.	,,	58	
1	Plate, 8	3 × 3	3 in	1. ,,	67	1	Strip,	4 ,,	"	60	

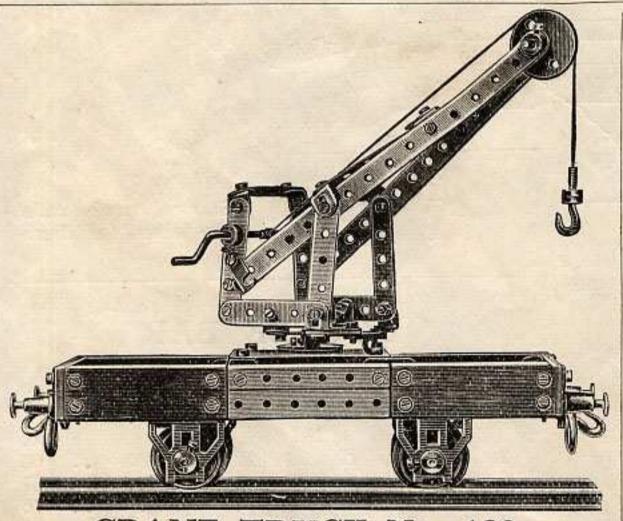


CRANE TRUCK No. 189.

6	Slips	No.	25	4	Wheels	No.	75
	Screws	,,	50	2	,,	,,	76
1000	Angle bars, 8 in		54	2	Axles, $3\frac{1}{2}$ in.	21	77
	Strips, 2 in.	**	56		Axle, $1\frac{1}{2}$,,	- 11	79
			57		Collars	m	82
8 2	,, 4 ,,	"	60		Handle	91	83
2	,, 8 ,,	**	63		Washers	"	84
19	Brackets	***	66		Buffers	"	85
3	Plates, 3×3 in.		68		Couplings	•	86
	Trunnions	"	74	1	Knob screw	,,	92
		"		1	Catch	"	95

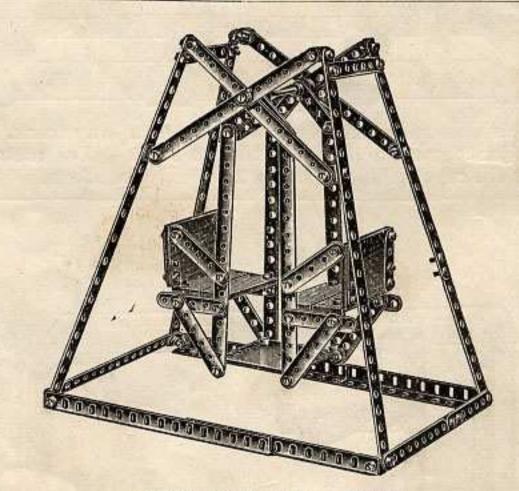


SWING No. 199.

8	Slips		No.	25	2	Strips,	$5\frac{1}{2}$ in.	No.	61
85	Screws		99	50	4	30	$6\frac{1}{2}$,,	,,	62
2	Angle b	oars, 6½i	n. ,,	53	6	,,,	8 ,,	11.	63
2	,,	" 8 i	n. ,,	54	3	.,,	$12\frac{1}{2}$,,	,,	64
8	Strips,	2 in.	,,	56	- 34	Bracke	ts	"	66
6	,,	$2\frac{1}{2}$,,	,,	57	1	Plate,	3×3 in.	,,	68
4	,,	3 ,,	,,	58	1	Axle, 3	$\frac{1}{2}$ in	,,	77
3	77	$3\frac{1}{2}$,,	**	59	6	Collars	•••	"	82

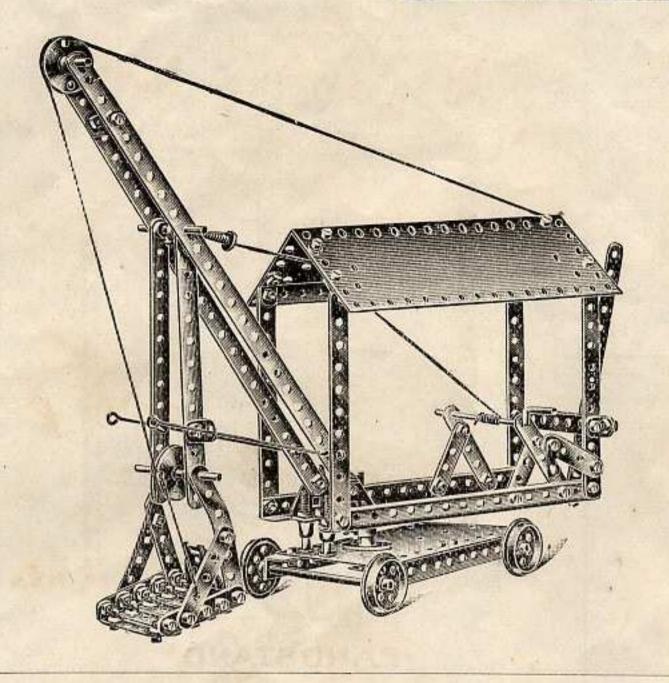

STEAM NAVVY No. 208.


	OILAM	TAL	VVI	TAO.	400		
78	Screws		3.00			No.	50
2		in.		44	0.00	,,	53
2	8	,,		272	(0)/27	n	54
2 3	,, 12	***				,,	55
	Strips, 2 in.		• •			,,	56
9	$,, 2\frac{1}{2},$				****	"	57
2	", $3\frac{1}{2}$ ",	(9)9	269		1858*X	" "	59
1	,, 4 ,,	***	* *		100000	- 22	60
4	$,, 5\frac{1}{2},,$			50.00	(*/*/	0.	61
3	6½			(*)	(*(*)	33	62
2	$12\frac{1}{2}$,				* *	.,	64
18	Brackets			4:4-	* *	. 11	66
3	Plates, 8 × 3 in.			4.4	(*:ex	,,	67
2	" 3×3 "				STATE .	"	68
4	Trunnions					"	74
4	Wheels				• •	111	75
4 2 1	,, ,,		**	* *		27	76
2	Axles, $3\frac{1}{2}$ in.	9.1	***	162	***	11	77
	,, 2\frac{3}{4},,		100		10.00	11	78
1	$1\frac{1}{2}$,	***	* *	**	25.050	**	79
5	Collars	***			18.90	13	82
1	Handle	72773				11	83
9	Washers			14.0	(# (#))	n	84
3	Buffers				***	n	85
1	Coupling					**	86
1	Catch					"	95
2	Rods		1			"	96

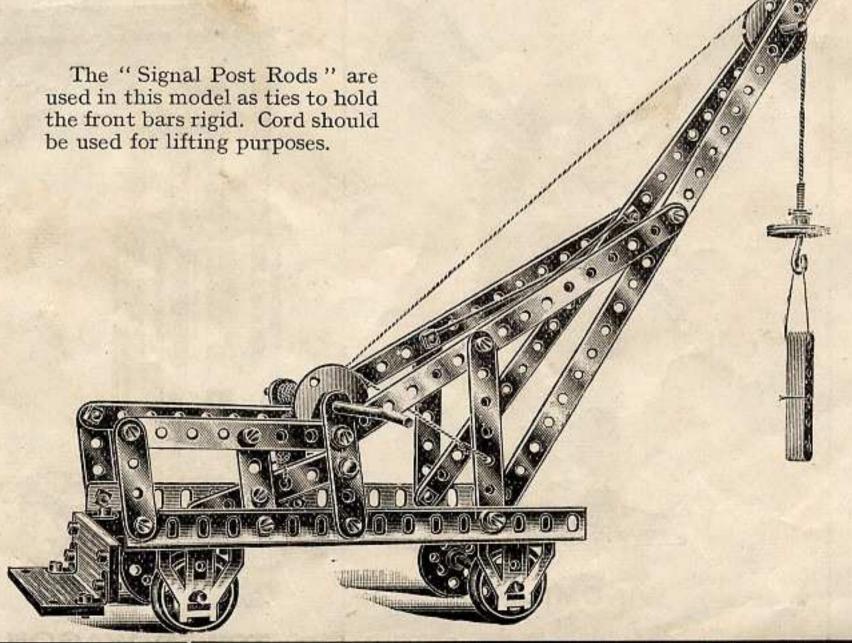



CRANE ON WHEELS No. 190.


0	Clina 2 v 1 in N	To.	25
2		10.	
36		,,	50
2	Angle bars, 8 in.	,,	54
3	Chains 9 in	,,	56
2	21		57
1		12.	58
1		"	
2		11	59
2 2	,, 4 ,,	**	60
2 2 7	0	,,	63
2	4 6 1		64
7	Dunalrata	,,	66
		,,	
1	Plate	,,	67
4	Trunnions	,,	74
4	TX/L = -1 =	,,	75
3			76
	A '' - 21:	12	
2	Axles, $3\frac{1}{2}$ in.	22	77
1	$1\frac{1}{2}$,	,,	78
1	Collon	,,	82
1	Handle		83
11	Washers	**	84
		11	
1	The state of the s	**	85
1	Knob screw	,,	92
2	Rods	,,	96
38		13	


PRIMUS ENGINEERING

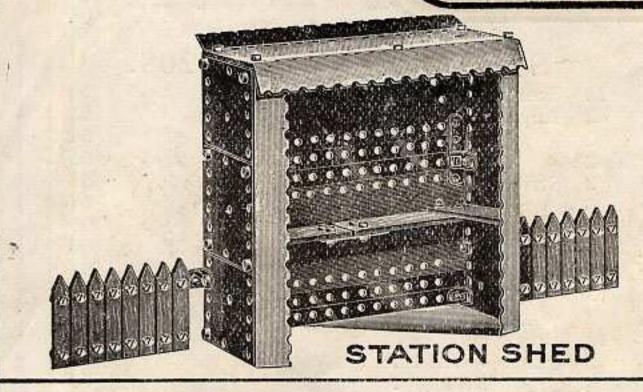


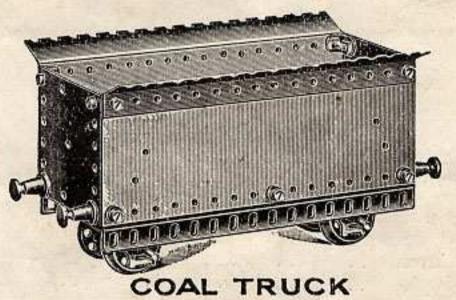


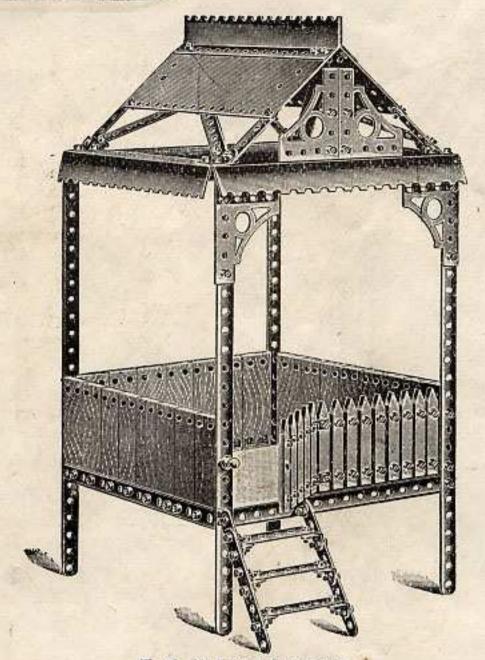



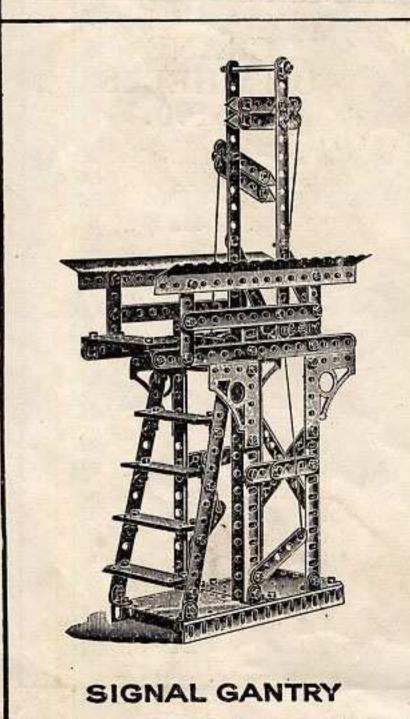

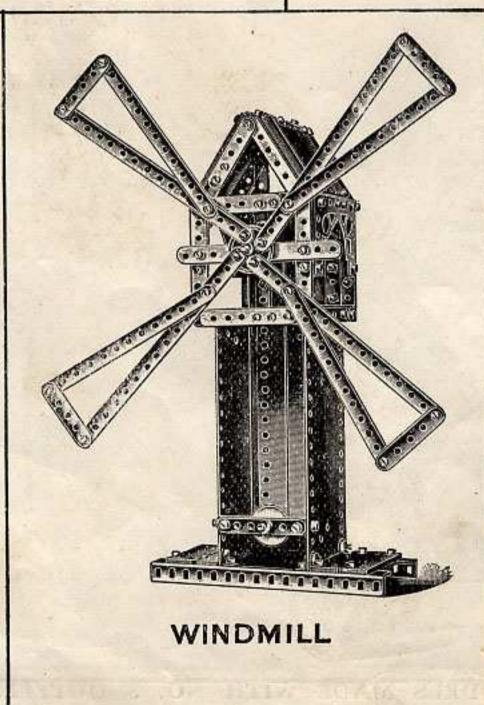

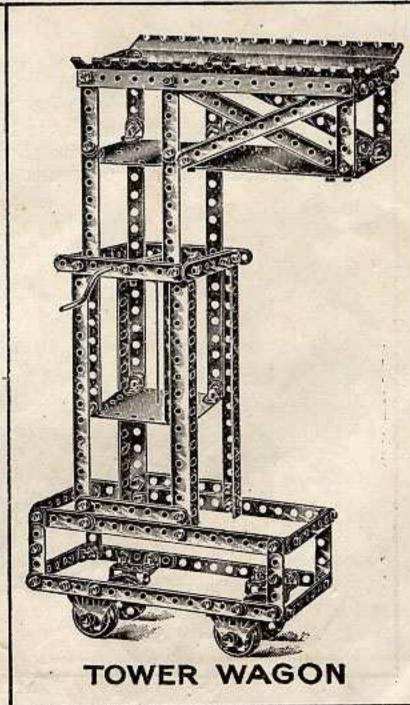

MODELS MADE WITH NO. 3 OUTFIT.


These models are made with

PANUS ENGINEERING


Nº4 OUTFIT


PASSENGER COACH, No. 254.

		18					
2	Side rails			***		No.	1
2			33	**		**	2
2	Carriage ends			* *		27.	3
2	Blocks		**	#1/#		,,	4
2	Windows	• •		5.5		,,	5
2		* *	24.04	+ +		"	6
4	Doors	• •		***	1.0	,,	7
2	Central Windo	ws .				,,	8
1	Floor	• •				**	9
1	Roof		+ +			,,	10
40	Screws				120.20	,,	50
2	Angle bars, 6½	in.	3.2	1.5	1919	**	53
3	* * * * * * * * * * * * * * * * * * *	• •	**		11.11	,,	57
4	$,, 3\frac{1}{2},$	***	***	25.7	100		59
2	$,, 6\frac{1}{2},,$,,	62
14	Brackets	***	***	* .*	* (*)	31	66
8	Hinges		4.4	4.74	2.7	- "	73
4	Trunnions	* *	58 85 Ye	(*)	7.05	33	74
4	Wheels	177	3 10	3/3	****	,,	75
2	Axles, $3\frac{1}{2}$ in.	***	81 S	2.7	1.2	- ,,	77
4	Collars	• •		74/74		"	82
4	Washers		esteta	STATE OF BELLEVILLE	100	,,	84
4 .	Buffers	41.4	44.4.7	4	* *	"	
2	Couplings		19.2			"	86
2	Lamps	•		<#2#		**	87
4	Handles ·				1.0		88
4	Turnbuttons	* *	(00)00	* *		110	89
4					• •	.,,	90
16	Screws and nu	its				- 33	91
				100			

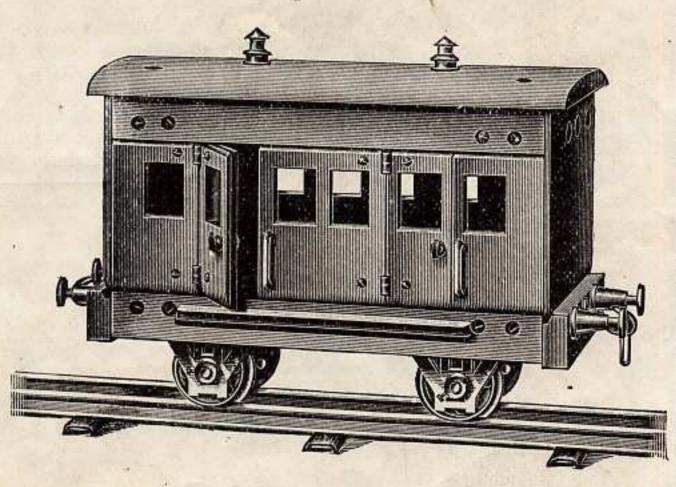

- (1) Make up the whole metal frame and be careful in fixing brackets.
- (2) Fit on side rails, one buffer block and one end.
- (3) Slide windows and doors in the grooves put in floor.
- (4) Fix on second buffer block and then the second end. The screw for fastening this should be put in, and the nut carefully adjusted inside by opening the two doors and sliding the windows along to give space. The floor is fitted in same as in Heavy Goods Truck, page 27.

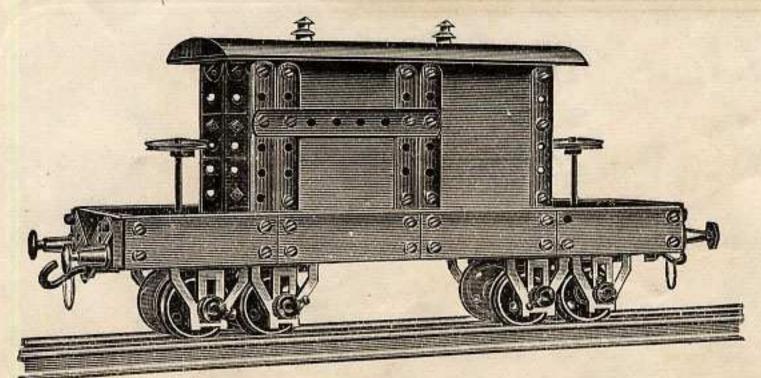

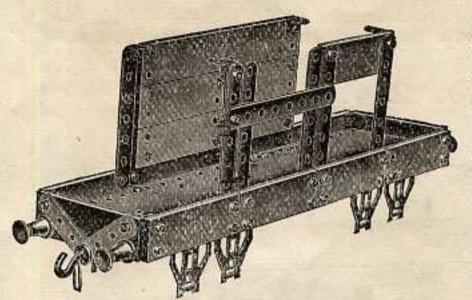



Fit the No. 25 slips inside the frame; this is important, as the roof screw-holes are 2 in. centres, and by fixing the brackets inside the wood body at back this width will be found exact. Washers are used between the brackets and $3\frac{1}{2}$ -in. strips in the front to adjust the width.

The base is composed of one 8-in. plate and two 3-in. plates bolted together.

DOUBLE BRAKE VAN No. 256.

1	Roof		No.	10
22	Wood slips, 3×1 in.		***	25
84	Screws		2))	50
2	Angle bars, 12 in.	(* :=	,,	55
4	Strips, 2 in	***	,,	56
10	$3\frac{1}{2}$,	909	11	59
2	., 4 ,,		.,,	60
12	Brackets		,,	66
1	Metal plate, 8 × 3 in.	TO THE	,,	67
2	_ ,, plates, 3×3 ,,		99	68
8	Trunnions			74
8	Flanged wheels	#*/**	**	75
2	Grooved wheels	20	**	76
4	Axle rods, $3\frac{1}{2}$ in.	18 (8)	39	77
2	23 ,,		**	78
12	Collars	. +:	99	82
12	Washers	10.0	33	84
4	Buffers	630	11	85
2	Coupling hooks		"	86
2	Lamps		"	87

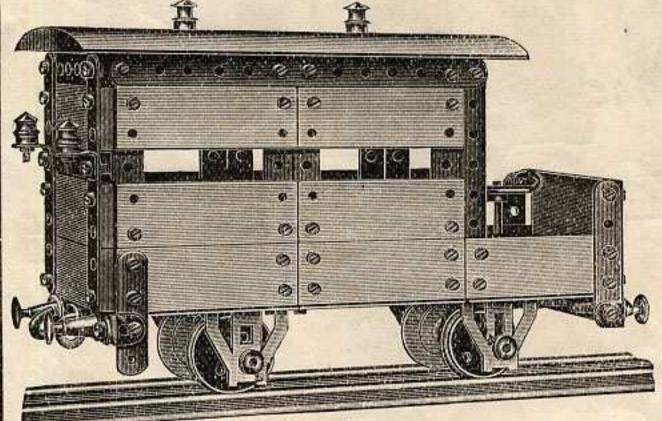

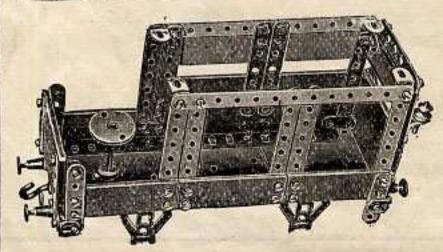


Build the chassis like Truck No. 113 on page 27. The No. 25 slips are fitted outside the frame, and washers are used to adjust

the brackets to fit roof.

The base plates are bolted on to the angle bars BELOW, and secured by the screws that fix the trunnions.

SINGLE BRAKE VAN No. 257.

1	Roof		1000	1000	No.	10
)	Wood slips, 3 × 1 in	1.		10.00	2.5	25
2	Screws		+=0	**	,,	50
2	Angle bars, 8 in.				99	54
4	Strips, 2 in.		+ +		337	56
	$\frac{1}{1}$, $2\frac{1}{2}$,		10140		77	57
2	,, 3 ,,		×4		33	58
2	$^{"}_{,,}$ $3\frac{1}{2}$ $^{"}_{,,}$	***		24 .0	***	59
3	., 4 .,			81 48	**	60
2 2 3 2	$6\frac{1}{2}$	5272	47	14141	111	62
6	Brackets			7402		66
3	Metal plates, 3 × 3					68
4	Trunnions		100	- S		74
4	Flanged wheels		**			75
1	Grooved wheel	28.0	* *		2.60	76
2	Axles, 3½ in.		**	505	101	77
1	Axle, 23 ,,	* (*)		* *	21	78
6	Collars	14(4)	* *	*0.*0	31	82
8			1.4	+.7+	37	84
	Washers		• •	* *	33	85
4	Buffers		• •	****	,,	86
2	Coupling hooks	7.	**		**	87
4	Lamps	• •			,,	01
			AT THE RESERVE OF THE PARTY OF			

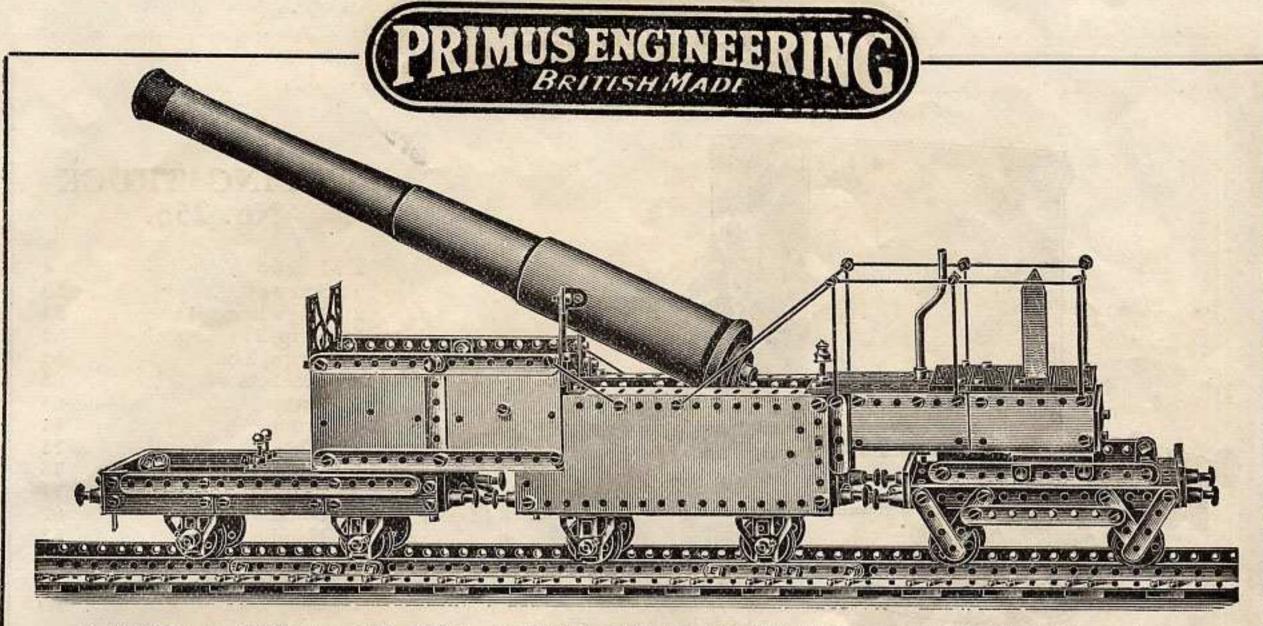


LONG RANGE NAVAL GUN ON RAILWAY TRUCKS, No. 270.

									10000					
19	Wood slips, 3×1 in				No.	25	. 13	Collars .			-		No.	82
139	Screws		***		,,	50	1	Handle .				100	,,	83
2	Angle bars, 6 in.				,,	53	14	***					,,	84
4	,, 8.,		2011		.,	54	4	Buffers .						85
2	12					55	3	Couplings .			The state of the s		,,	86
10	Metal strips, 2 in.				2000	56	1	T			* *	• •	"	87
4					11.	57	3	Knob screws	• •	100	7.00	2.7	"	
8	" $\frac{21}{2}$ "	1.00			. 11	3277	0			10.00		-	**	92
0	,, 3,,,,		***	* *	- 99	58	2	Signal rods		(1)(1)		• •		96
2	., 3½ ,,			* * *	22.	59	2	Wood screw	s					97
2	$5\frac{1}{2}$,			* *	31	61								
4	$6\frac{1}{2}$,					62		FXTRA	PARTS	REOU	IRED			
2	,, 8 .,	***			,,	63	1			1020	HULD.			
2	Architraves			2000	,,	65	2	Axles, $3\frac{1}{2}$ in.				•:•	,,	77
40	Brackets					66	3	Collars .					-,,	82
4	Metal plates, 8 x 3			7800	- Ville	67	8	Buffers .			1		,,	85
11	3 \ 3			10000	**	68							111	
8	Trunniona				"			SPECI	AL PAR	TS RE	OUIRE	D.	1	
8	T21 1 1 1		• •		2.1	74	•				20			
4	D 11 1 1				23	75	2	Wire stays			***		,, 1	
4	Pulley wheels			5.00	**	76	10	., ,, .		2			,, 1	155
4	Axles, $3\frac{1}{2}$ in					77	1	Pulley wheel	***				., 1	158
													\$10°E	

- (1) Make each truck separately and then couple up.
- (2) The firing platform is made by bending the No. 68 plates.
- (3) The Gun can be made of paper or a piece of wood can be turned to shape; fix with wood screws.
- (4) By means of a cord attached to the gun, passing through a bracket in the base of large truck, and thence to the winding handle the gun can be elevated to any desired angle.


PARTS FOR BUILDING RAILWAY TRACK.

17	Wood slips, 3 × 1 in.	 		No.	25	4	Angle bars, 12 in.		200	No. 55
84	Screws	 			50	4	Metal strips, 4 in.			,, 60
2	Angle bars, 8 in	 	-	12/201	54	4	No. of the last of			

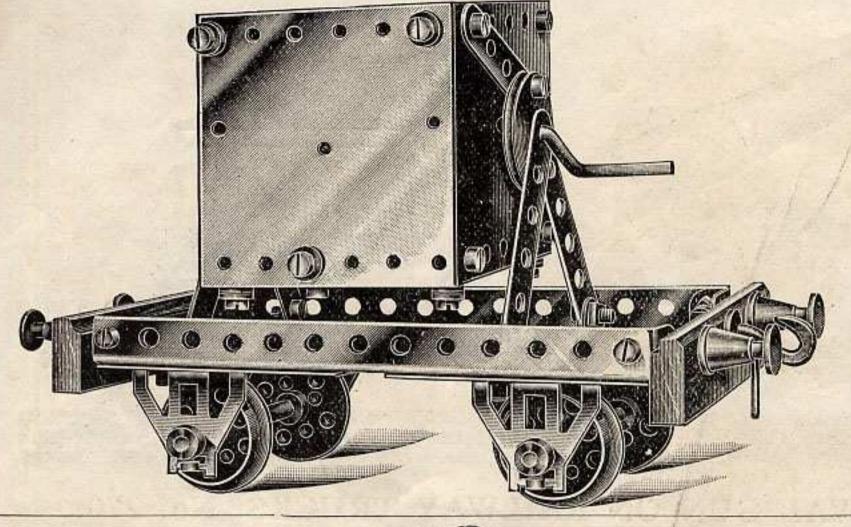

TIPPING TRUCK No. 255.

2	Blocks		No.	4
39	Screws		***	50
2	Angle bars, 61 in	*	- 10	53
1	Strip, 2 in.			56
4	Strips, 3 in.			58
18	Brackets			66
7	Plates			68
4	Trunnions	4		74
4	Wheels	0.5		75
1	Wheel			76
2	Axle rods, 31 in.		10	77
5	Collars		19	82
1	Handle			83
28	Wachere		111	84
4	Dff		,,	85
2	Compline		n	86

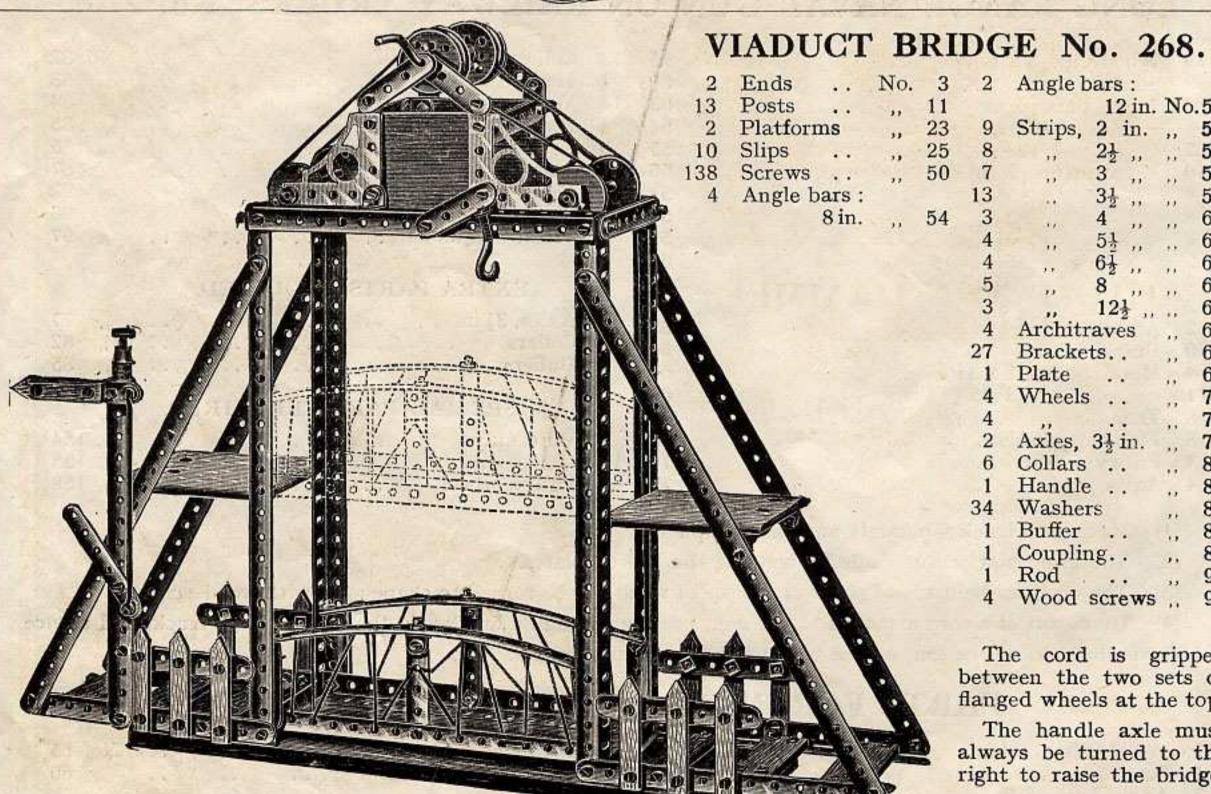



12 in. No.55

Architraves Brackets.. Plate .. 67 Wheels .. 75 76 Axles, 31 in. .. Collars .. 1 Handle ... 34 Washers 1 Buffer Coupling. . Rod Wood screws ..

The cord is gripped between the two sets of flanged wheels at the top.

The handle axle must always be turned to the right to raise the bridge.

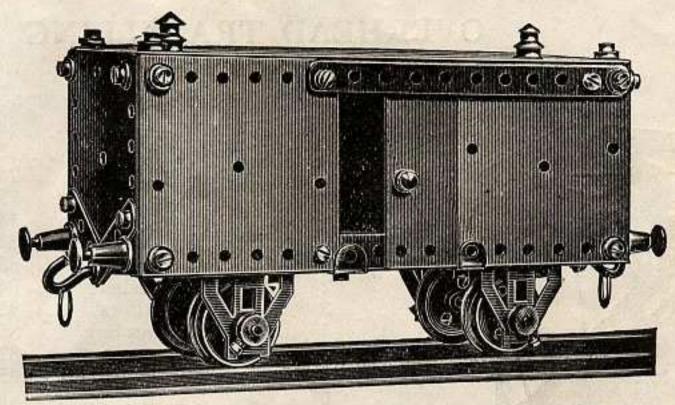

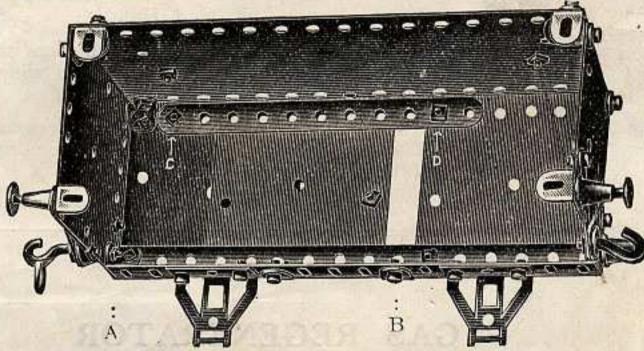

ARMOURED TRUCK No. 261

WITH SLIDING DOOR.

38 Screws .. No. 50 2 Axles, 3½ in. No. 77
2 Angle bars, 8 in. ,, 54 4 Collars .. ,, 82
4 Strips, 2 in. ,, 56 34 Washers .. ,, 84
4 ,, 5½ ,, 61 4 Buffers .. ,, 85
16 Brackets ,, 66 2 Couplings ,, 86
2 Plates .. ,, 67 2 Lamps .. ,, 87
8 ,, .. ,, 68 2 Knob screws .. 92
4 Wheels .. ,, 75

1) Fix Trunnions on angle bars.

(2) Fix up the two ends, fix buffers and a washer beneath each; see that the brackets are right way; put two washers beneath each screw in the corners; then fit 2 in. strips and coupling hooks.


(3) Fit on the plates for one side, and note when fixing the 5½ in. strips one goes inside and one out, and washers must be put between the inside strip, at C and D, and the 3 × 3 in. plates, so as to allow for the door to slide in, also washers must be put between plates and angle bars at A and B.


(4) Fix on roof with lamps, and lay floor loose inside.

(5) Fit on second angle bar and remainder of 2-in. side. The second door can then be slipped in the groove and secured by the two angle brackets. Knob screws for handles can be fixed last, and the floor will rest on the screws of buffers. Wheels are fitted as in other models.

AUTOMATIC HAMMER IN SHED No. 265


2	Slips				No.	25
70	Screws		4457		.,,	50
5	Strips, 2 in.				.,,	56
3	$^{\prime\prime}$, $2\frac{1}{2}$,	44				57
1	Strip, 3					58
1	$_{,,}$ $3\frac{1}{2}$ $_{,}$					59
2	Strips, 5½			1.1	**	61
4	$_{-}$, $6\frac{1}{2}$,,			* *		62
24	Brackets	**		**		66
4	Plates, 8 × 3 in.	• •		* * **	930	67
7	3×3 ,,	***				68
1	Ridge, 8 in.	+5.4		* *		70
3	Wheels	+(4)		*74		75
2	. "	• . •			44	76
1	Axle, $3\frac{1}{2}$ in.				**	77
1	2 ,,		4.6	919		79
7	Collars			• • •		82
1	Axle		200	0 P		83
19	Washers					84
	he hammer wo			llar p	rinci	ple
to t	hat illustrated o	n page	25.			

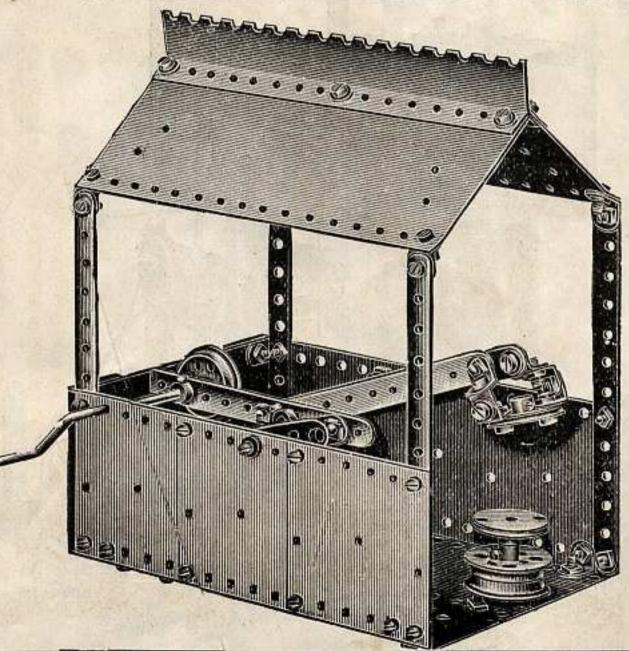

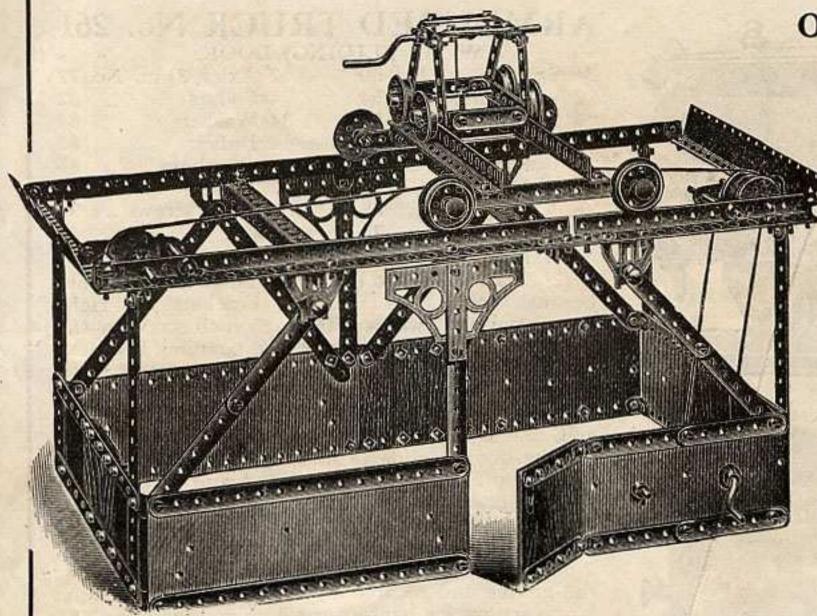

OVERHEAD TRAVELLING CRANE No. 267.


			No.	No.
	12	Slips, 3 × 1 in	.25	4 Trunnions 74
	44	Screws	50	8 Wheels 75
	2	Angle bars :		4 76
4		6½ in	53	2 Axles, 3½ in. 77
١	4	,, 8 ,,	54	5 ,, 23 in. 78
	2	,,12 ,,	55	11 Collars 82
	10	Strips, 2 in.	56	1 Handle 83
	8	$\frac{21}{2}$	57	36 Washers 84
	8	,, 3 ,,	58	4 Buffers 85
	14	,, 3½ ,,	59	1 Coupling 86
	3	,, 4 ,,	60	4 Lamps 87
	4	,, 5½ ,,	61	1 Catch 95
	4	$,, 6\frac{1}{2},$	62	Extra part:
	6	,, 8 ,,	63	1 Handle 83
	3	,, 121 ,,	64	C-11
	4	Architraves	65	Collars of buffers are
	31	Brackets	66	used on lower winch
	2	Plates	67	gear.
	8	,,	68	Screws of buffers are
	2	Eaves, 8 in.	71	used on travelling
	2	Hinges	72	trolley.

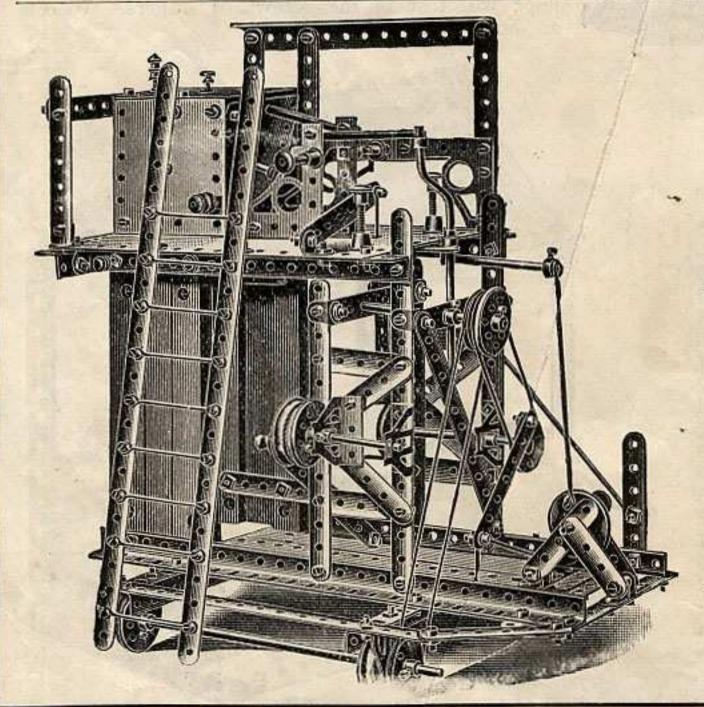

GAS REGENERATOR

No. 269.

				1	No.		ic ris	1	To.
4	Side ra	ils			1	4	Plates, 3×3		68
2	Truck	side	es		17	8	Trunnions		74
144	Screws				50	8	Wheels		75
2	Angle l	oar	s, 61	in.	53	4	,,		76
4	,,		8	25.40	54	4	Axles, 3½ in.		77
2	,,		12	-	55	3	,, 23 ,,		78
9		2	in.		56	1	,, 11/2 ,,		79
6	,,	21	,,		57	16	Collars		82
6	,,	3	,,		58	1	Handle		83
7	,,	31	,,		59	13	Washers		84
3		4	"		60	4	Buffers	55	85
4	,,	51		10000	61	3	The state of the s	820	87
3	.,	61	**	alesters.	62	3	Company of the Compan		92
3	,,	8	990	Carretto.	63	2	The second of the second secon		96
2		121	-		64	100	Wood screws		97
4	Archit	17850	and the second		65		Extra parts :		New York
. 31	Bracke				66	4	Collars		82
4	Plates,				67		Axles, 8in.		111578

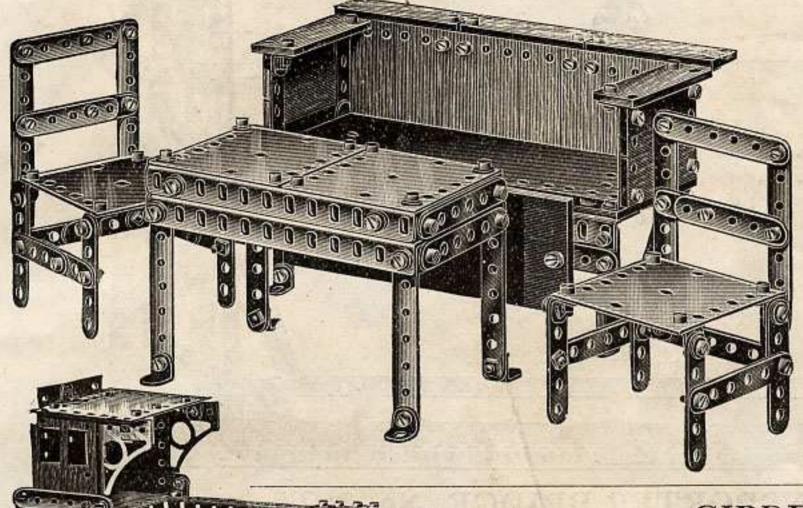

SMOKING LOUNGE No. 309.

LOUNGE TABLE AND TWO CHAIRS.


Floor	***	No.	9
Slips, 3 × 1 in.		. ,,	25
Screws		.,	50
Angle bars			52
		,,	54
Strips, 2 in.		**	56
,, $2\frac{1}{2}$,,		.,,	57
15 E 1001 15 E/		71	58
$3\frac{1}{2}$,		7.5	59
4 ,,	***	11	60
	/	110	66
		29.90	67
	-		68
Washers		37	84
	Slips, 3 × 1 in. Screws Angle bars Strips, 2 in. 21/2 3 31/2	Slips, 3 × 1 in	Slips, 3 × 1 in

GIRDER CRANE No. 266.

		- 010	100					
2	Windows .					•/•	No.	8
2	Slips					\$68.10		25
36	Screws		202		4.4	44		50
2 2	Angle bais,	ul in.					.,	53
2	,,	8 ,,						54
2	,, 1	2 ,,						55
6	Strips, 2 in							56
2	,, 21/2 ,,	00-					***	57
4	,, 3 ,		•					58
8	,, 31 ,,					• 00	**	59
3	,, 4 ,						**	60
3 2	$,, 5\frac{1}{2},$						11	61
2	$\frac{61}{2}$.							62
6	,, 8,	37	artic - 1				11	63
2	$12\frac{1}{2}$				14.11	49.5	-,,	64
4	Architraves	de la constant				and the	71	65
26	Brackets .							66
7	Plates .	The last	1030	Maria .		200	**	68
3	Trunnions .					400	**	74
	Wheels .	-	(6)44	163/30	0.0	100	**	75
3	Wheels .		* *	SA.	***	140	3.1:	76
3 3	Axles, 3½ in.		*(*)	(*) *			**	77
11	Callaga			**	**			82
1	Handle .			• •			**	83
23/70	ANALYSIS STREET		4		• •	* 1	"	84
20	Washers .		***		****		"	86
1	Coupling .			•		-	,,	JC 20045
4	Screws and			• •			**	91
2	Rods .		• •	***	• •		100,000	96
6	Wood screw	S	DID	r DEC	TILDIN		See	97
-			PAR	LKEQ	UIRE	J.		00
1	Handle .		• **	***	***	•1•	**	83

This model should be fixed to a wood base by means of the No. 97 wood screws as shown in sketch.




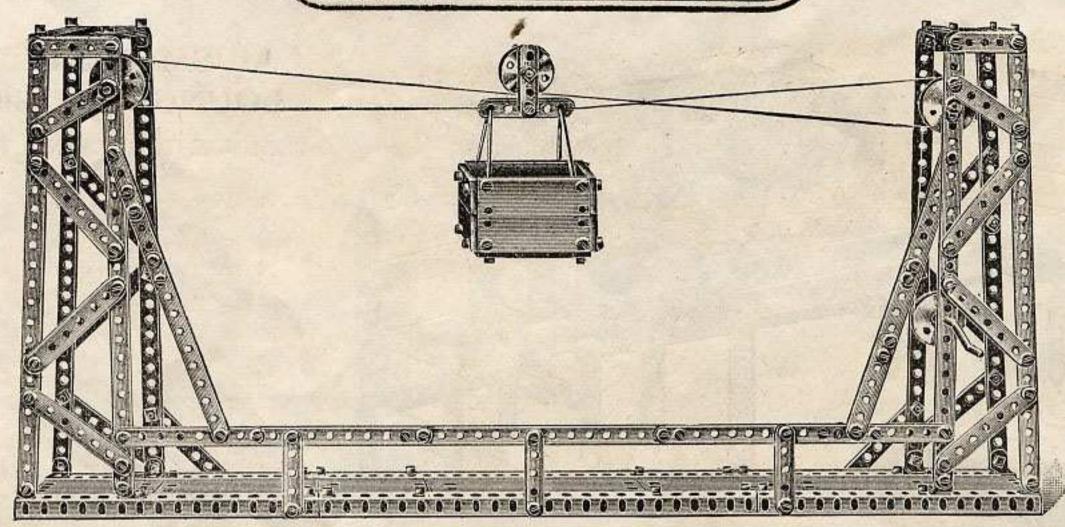

TRANSPORTER BRIDGE, No. 262.

11	Slips, 3×1 in.		No.	25	3	Strips 4 in.	No.	60	4	Wheels			No.	75
144	Screws			50	3	$\frac{1}{1}$, $5\frac{1}{2}$,	 ,,,	61	2					76
4	Angle bars, 8 in.		.,,	54	3	$,, 6\frac{1}{2},$	 "	62	2	Axles, 31				77
2	" " 12 in.		,,,	55	6	,, 8 ,,	 ,,	63	8	Collars		-2900		82
12	Strips, 2 in.		,,	56	3.	,, 12 ,,	 ,,	64	* 1	Handle			,,	83
8	$\frac{21}{2}$	***	,,	57		Brackets	 ,,	66	20	Washers			"	84
7	,, 3 ,,		,,	58		Plates, 8×3 in.	 ,,	67	2	PRODUCTION OF THE PARTY OF THE			**	92
14	$3\frac{1}{2}$,		11	59	2	" 3×3"	 .,,	68	2	Signal rods	S		11	96


Use cord as illustration for working this model

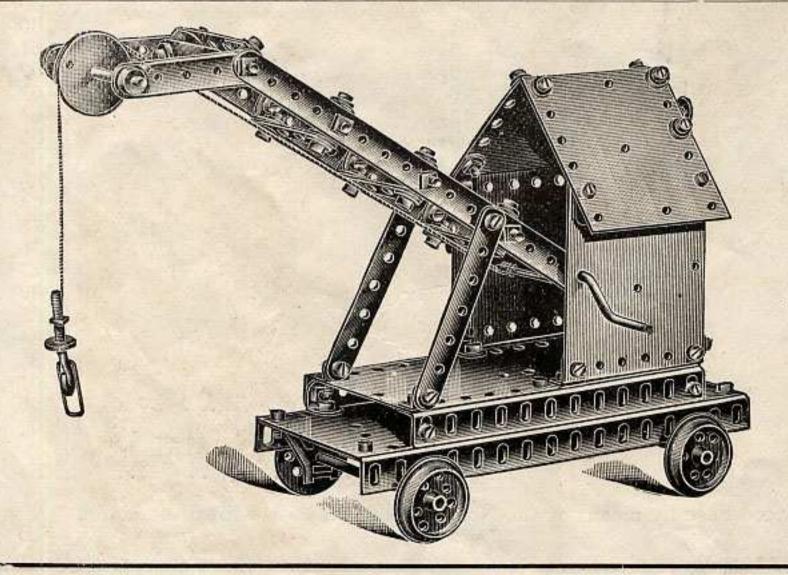


CRANE TRUCK No. 315.

72	Screws			No.	50
2	Angle bars, 61	in.	200	,,	53
2	,, ,, 8	,,		,,	54
8	Strips, 2 in.			,,	56
5	", $2\frac{1}{2}$ ",			"	57
2	", $3\frac{1}{2}$ ",			,,	59
2	., 8 ,,			**	63
39	Brackets		• •	"	66
1	Plate, 8 × 3 in.			,,	67
7	Plates, 3×3 in.			21	68
4	Wheels	**		,,	75
1	Wheel			,,	76
2	Axles, $3\frac{1}{2}$ in.	**		,,	77
1	23 .,			,,	78
3	Collars	• •		11	82
32	Washers		100	**	84
1	Coupling		***	"	86
	Tire cond or	#11	-1:		


Use cord as illustration.

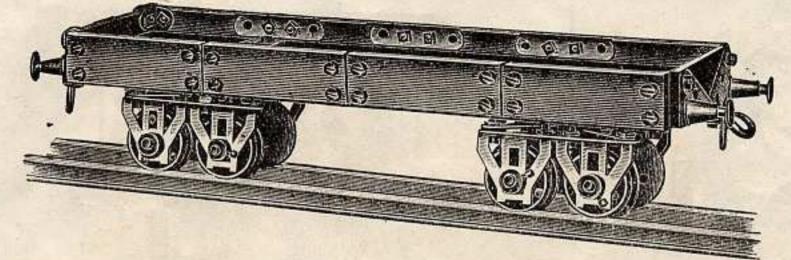

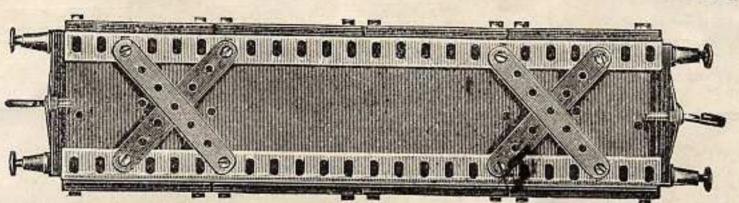

EXPRESS TRUCK ON BOGIES. No. 258

10	Slips, 3 × 1 in.		No.	25
64	Screws	10000	7,1	50
2	Angle bars, 12 in.		.,	55
10	Strips, 2 in.	100		56
4	., 3		,,	58
8	$3\frac{1}{2}$,	The same		59
8	Brackets		"	66
1	Plate		"	67
2	Plates	1	"	68
8	Trunniona	1 3 1	"	74
8	XX7b1-		"	75
4	Axles, 23 in		**	78
8	Collors	* *	21	82
22	XX71		**	84
1	TO CC		**	
2	0 1	• •	"	85
2	Knobs		**	86
4	Knobs		"	92

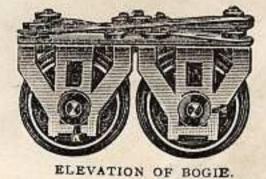




The Bogie frame is made up with two 3 in. strips for sides and two 3½ in. strips for cross-pieces; washers are set on the screws at opposite corners to level up the cross-strips

It is secured to the truck through the central holes of end base plates by means of knob screws double nutted, and washers are used on the screws to provide clearance for the truck to swing on the bogies.

EXPRESS COAL TRUCK ON BOGIES. No. 259.

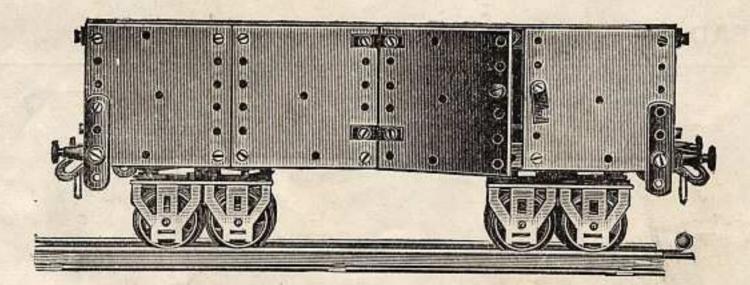



The ends should be fitted to the angle bars first and the sides fitted on afterwards.

The base and frames are made up as on the Express bogie truck.


Washers are again important, and two each are used on the corner screws at ends and lower screws at sides, beneath the buffers and on the knob screws and bogie frames.

ALL METAL.

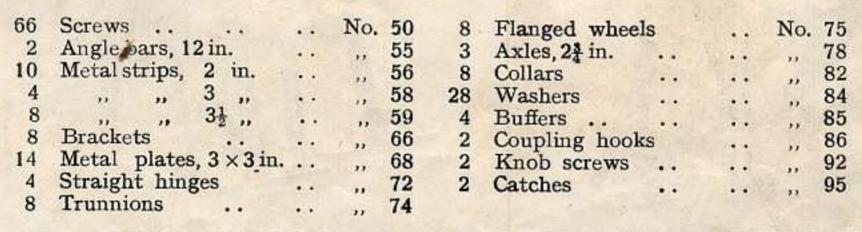


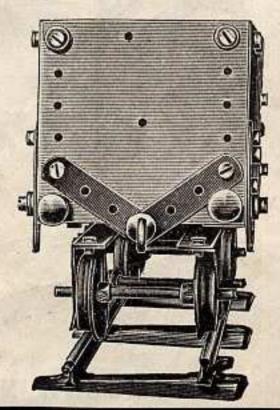


PRIMUS ENGINEERING

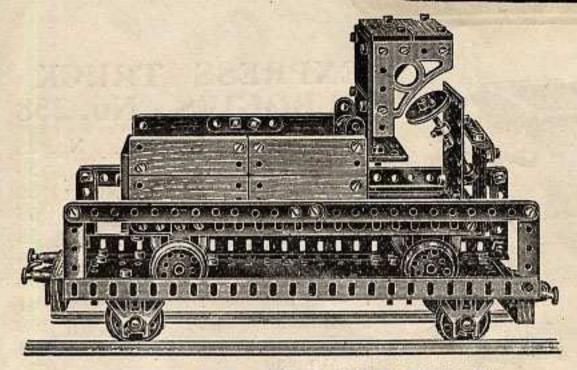


MOTOR TRANSPORT TRUCK

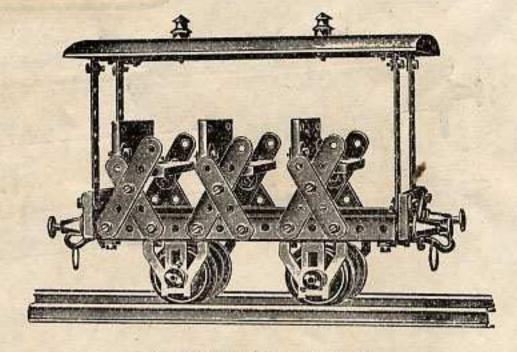


TOURIST CAR

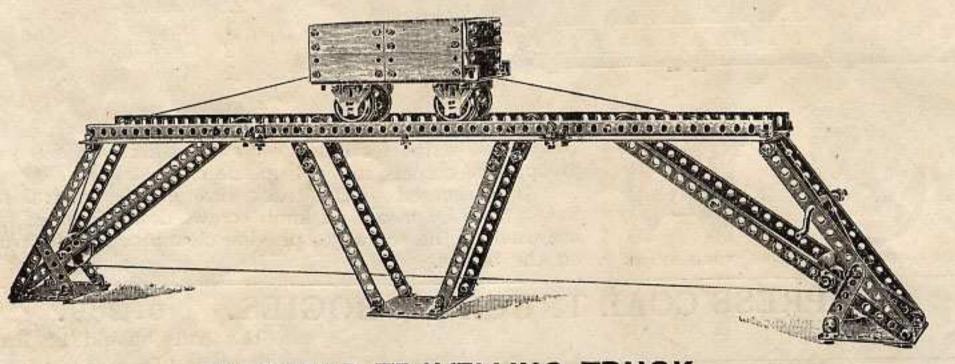

OVERHEAD TRAVELLING TRUCK

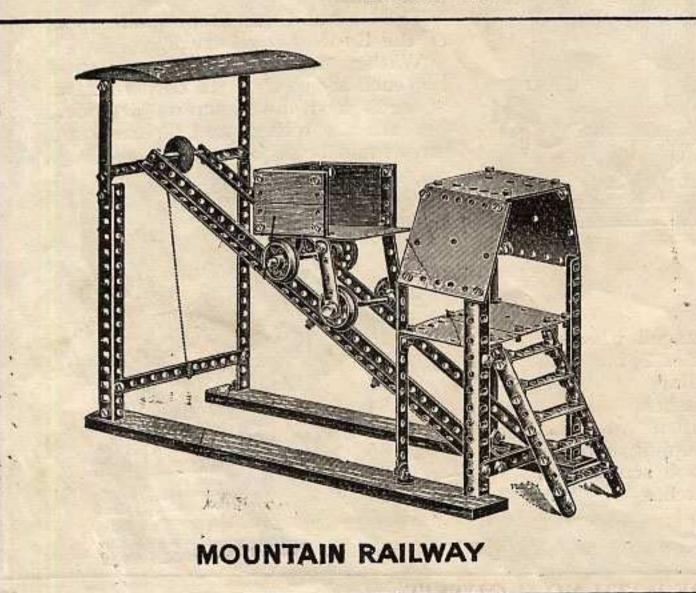

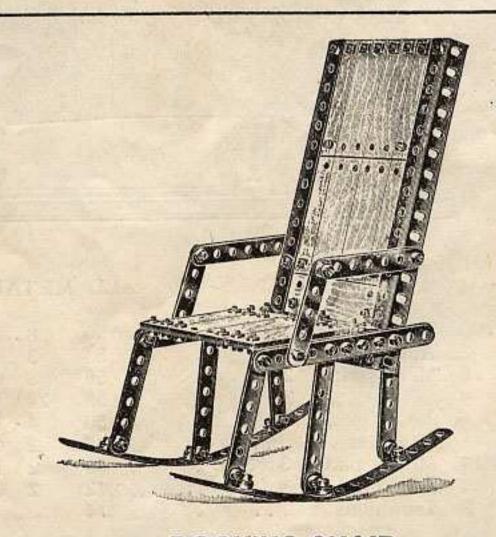


ROCKING CHAIR

These models are made with

PRIMUS ENGINEERING


Nº5 OUTFIT

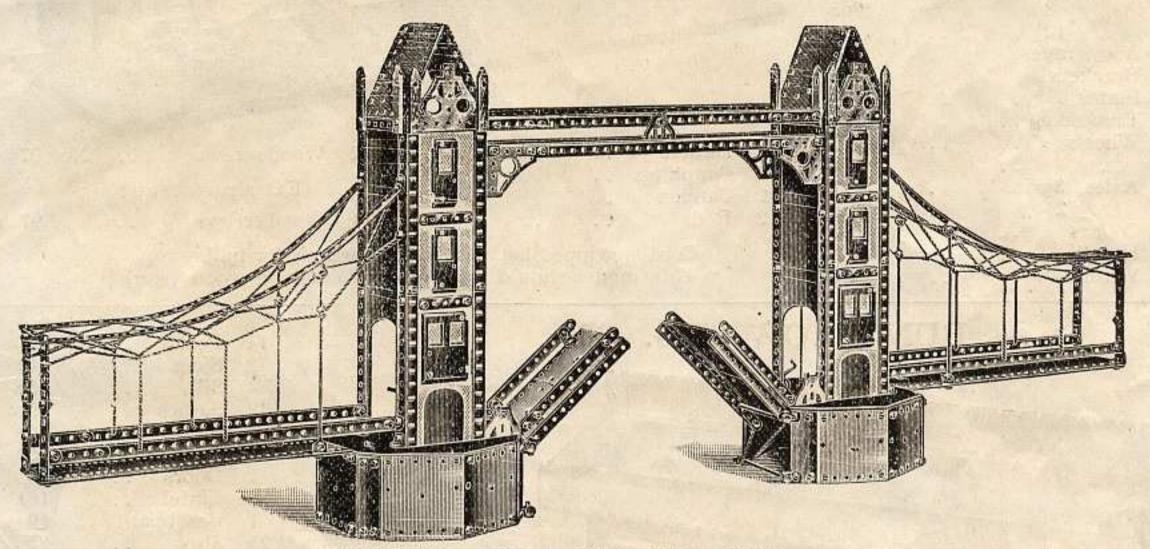


TOWER BRIDGE, No. 365.

					No.		1	No.
4	Carriage doors	7	4	Strips, 5½ in.	61	12 Collars		82
2	Central windows	8	4	$,, 6\frac{1}{2},,$	62	1 Handle	90000	83
16	Railings	11	10	., 8 ,,	63	24 Washers		84
8	Wood slips	25	3	$12\frac{1}{2}$	64	12 Door screws		91
10	Screws	50	8	Architraves	65	4 Rods		96
4	Angle bars, 6 in.	52	76	Brackets	66	4 Wood screws	s	97
8	,, ,, 8 ,,	54	7	Plates, 8 × 3 in.	67	ADDITIONAL H	PART	rs
2	., ,, 12 ,,	55	14	" 3×3 "	68	2 Trunnions		74
12	Strips, 2½ in	57	8	Trunnions	74	4 Wire stays		
6	., 3 ,,	58	4	Grooved wheels	76			terent.
14	$3\frac{1}{2}$,,	59	4	Axles, $3\frac{1}{2}$ in	77	72	40000	66
1	2 6 8 0 4 8 2 6	4 Carriage doors 2 Central windows 6 Railings 8 Wood slips 0 Screws 4 Angle bars, 6 in. 8 8 2 12 2 Strips, 2½ in 6 3	2 Central windows 8 6 Railings 11 8 Wood slips 25 0 Screws 50 4 Angle bars, 6 in. 52 8 8 54 2 12 55 2 Strips, 2½ in 57 6 3 58	4 Carriage doors 7 4 2 Central windows 8 4 6 Railings 11 10 8 Wood slips 25 3 0 Screws 50 8 4 Angle bars, 6 in. 52 76 8 8 54 7 2 ,, 12 55 14 2 Strips, 2½ in 57 8 6 ,, 3 ,, 58 4	4 Carriage doors 7 4 Strips, 5½ in. 2 Central windows 8 4	4 Carriage doors 7 4 Strips, $5\frac{1}{2}$ in. 61 2 Central windows 8 4 . $6\frac{1}{2}$, . 62 6 Railings . 11 10 . 8 ., . 63 8 Wood slips . 25 3 ., $12\frac{1}{2}$, . 64 0 Screws . 50 8 Architraves . 65 4 Angle bars, 6 in. 52 76 Brackets . 66 8 8 ., 54 7 Plates, 8×3 in. 67 2 ., ., 12 . 55 14 ., 3×3 ., 68 2 Strips, $2\frac{1}{2}$ in 57 8 Trunnions . 74 6 ., 3 , . 58 4 Grooved wheels 76	4 Carriage doors 7 4 Strips, $5\frac{1}{2}$ in. 61 12 Collars 2 Central windows 8 4 $6\frac{1}{2}$ 62 1 Handle 6 Railings 11 10 8 63 24 Washers 8 Wood slips 25 3 $12\frac{1}{2}$ 64 12 Door screws 0 Screws 50 8 Architraves 65 4 Rods 4 Angle bars, 6 in. 52 76 Brackets 66 4 Wood screws 8 8 54 7 Plates, 8 × 3 in. 67 ADDITIONAL F 2 12 55 14 3 × 3 68 2 Trunnions 2 Strips, $2\frac{1}{2}$ in 57 8 Trunnions 74 4 Wire stays 6 3 58 4 Grooved wheels 76 2 Tapped axles	4 Carriage doors 7 4 Strips, $5\frac{1}{2}$ in. 61 12 Collars 2 Central windows 8 4 $6\frac{1}{2}$ 62 1 Handle 6 Railings 11 10 8 63 24 Washers 8 Wood slips 25 3 $12\frac{1}{2}$ 64 12 Door screws 9 Screws 50 8 Architraves 65 4 Rods 1 Angle bars, 6 in. 52 76 Brackets 66 4 Wood screws 1 Angle bars, 6 in. 52 76 Brackets 66 4 Wood screws 8 8 54 7 Plates, 8×3 in. 67 ADDITIONAL PART 2 12 55 14 3×3 68 2 Trunnions 2 Strips, $2\frac{1}{2}$ in 57 8 Trunnions 74 4 Wire stays 16 3 58 4 Grooved wheels 76 2 Tapped axles,

Buttresses should be built first; pulley wheels for raising should be fitted in towers before cardboard fronts are fixed. The windows on the side of the towers are screwed on to the card sides. Card can be cut for top of buttresses.

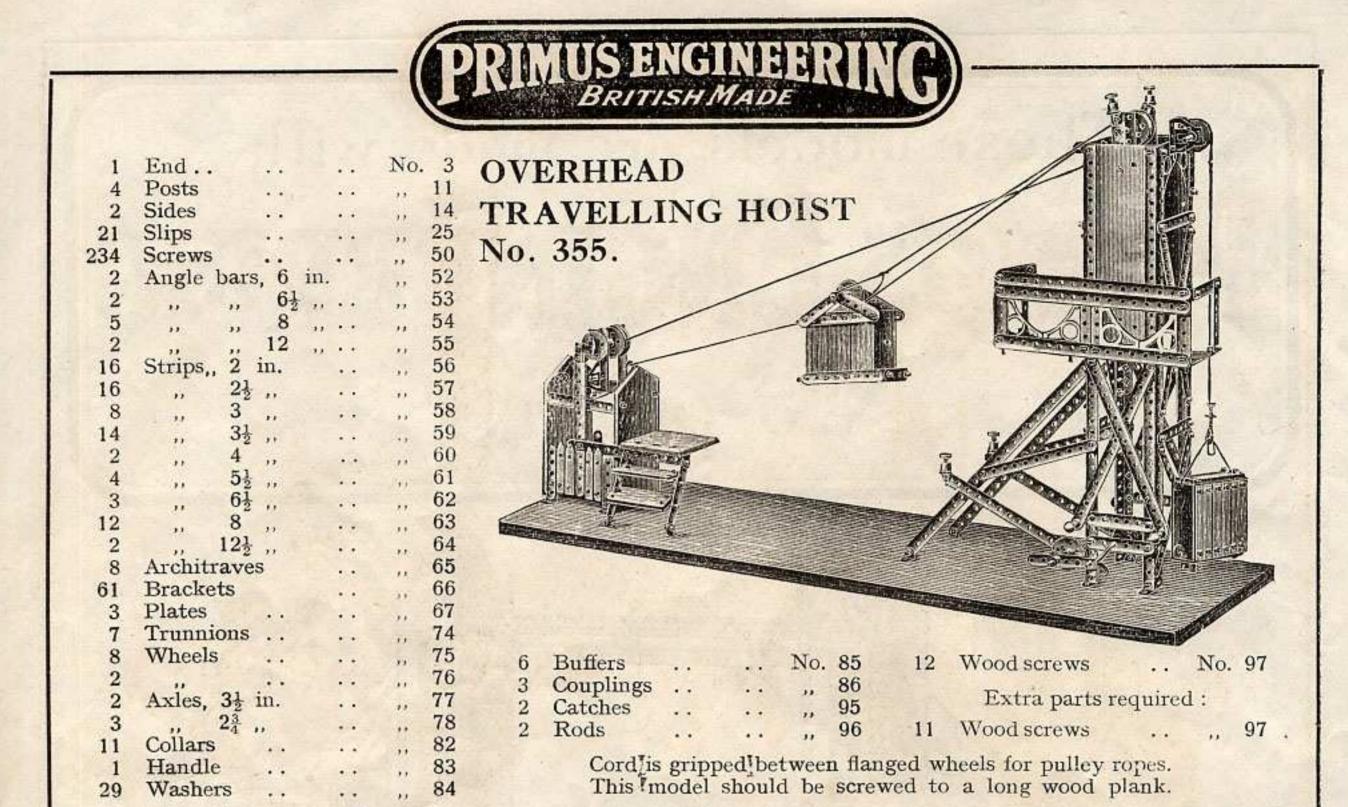


BUNGALOW. No. 300.

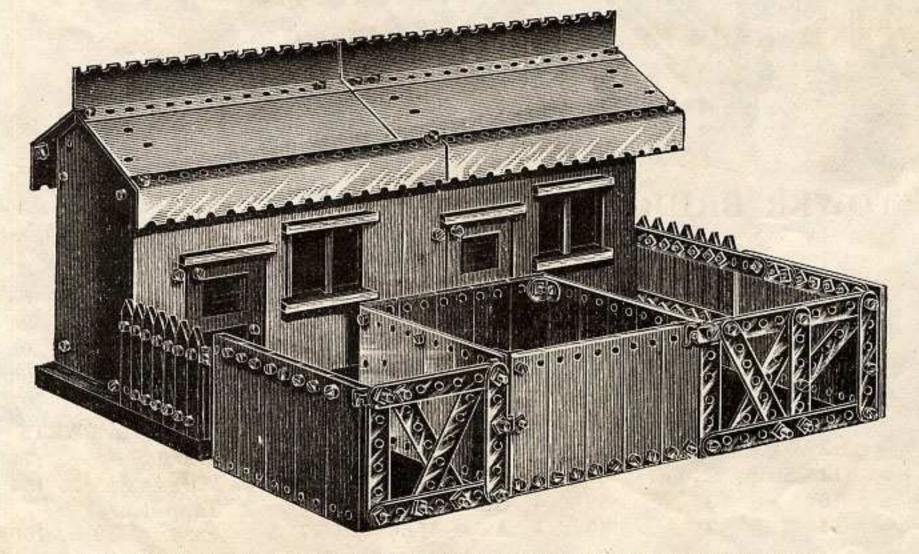

The back of the bungalow is made of metal plates bolted together; the roof is built and laid on last.

14	Posts No	0. 11
2	Sides ,	14
4	Sills	15A
2	Sashes ,,	15.
1	Front ,	15-
1	Back ,	150
2	Doors ,	16
2	Lintels ,	16A
- 1	Baseboard ,	19
25	Slips ,	. 25
2	Glasses ,	26
150	Screws ,	50
7	Strips, 2 in.,	56
3 5	$\frac{21}{2}$,,	. 57
5	,, 3 ,,	, 58
14	$3\frac{1}{2}$,, ,	, 59
1	1	,, 60
16	Brackets	, 66
8	D1-1 - 0 - 0"	, 67
4	,, 3×3",	CO
1	Tile 61 in	, 69
1	,, 8 ,, ,	70
4	Eaves, 8 in. ,	71
6	Hinges ,	72
6	Washers ,	01
2	Handles ,	00
4	Knobs ,	02
2	Catches ,	05
The same of		

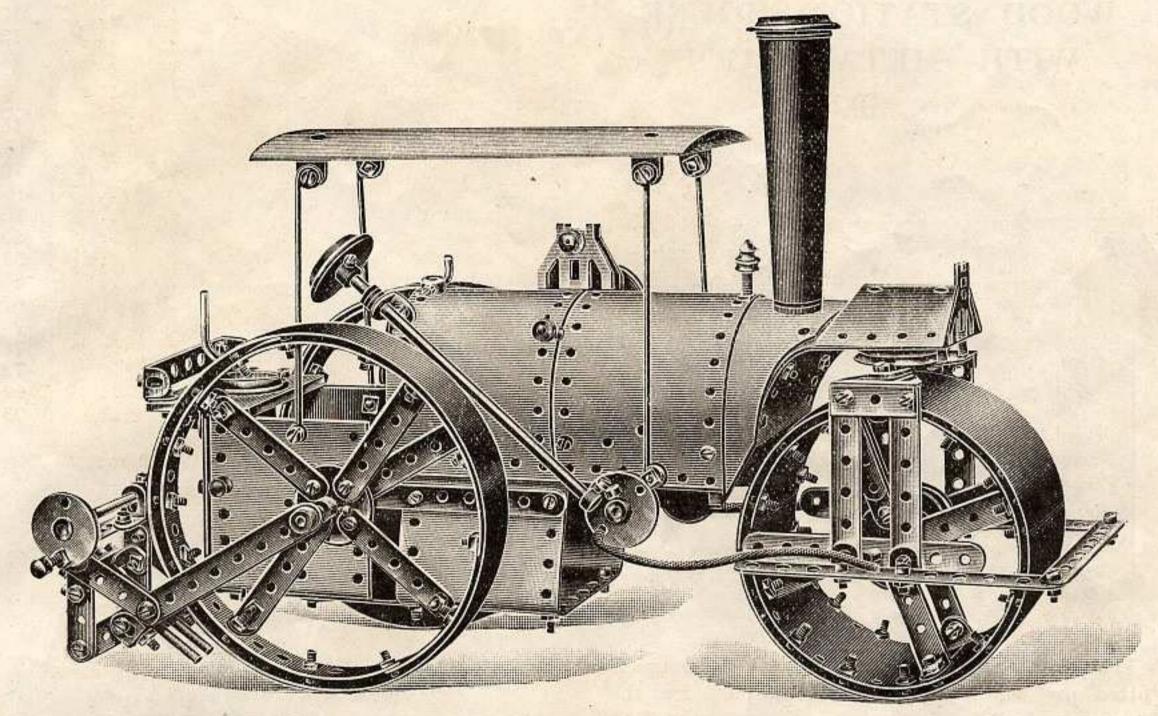

RUSTON STEAM ROLLER, WITH SCARIFIER. No. 360.

1	Carriage roof					No.	10	8	Flanged wheels				No.	75
2	Wood slips					10	25	3	Grooved wheels					76
150	Screws					"	50	1	Axle rods, $3\frac{1}{2}$ in.				"	77
2	Angle bone 6 in					**	52	3	23				"	78
16	Metal strips, 2 in					,,	56	13	Collars		1888		"	82
9	21						57	1	Handle axle			No.	100	83
5	2					**	58	18	Wachers		• •		12	84
3	21	31				**	59	1	D. ff.				7.6	85
2	1	"				**	60	2	Lampe		•		32	87
3	$\frac{7}{1}$ $\frac{7}{5\frac{1}{2}}$	"				3.6	61	1	Carriage side rail		1/3		2.2	
4	$\frac{32}{61}$	13	1918	200	1111	22	62	3	Knob screws and nuts	* *	10.0	250%	33	90
5	., 8	11	2550	100	10.5	200		100		* *			200	92
59	Brackets	"	10.00	300		**	63	4	Signal post rods				11	96
29	THE RESERVE OF THE PROPERTY OF THE PARTY OF		70.0	***	*,*	31	66	3	Wood screws			0.00	11	97
6	Plates, 8×3 in.					**	67		73770	D 1 D 1	T. C.			
6	,, 3×3 in.					11	68	WHAT TO	The state of the s	RA PA	KI.			
8	Trunnions				200	200	74	- 70-1	Axle, 6 in.				OFF	


Fit up front roller first; for this two 8 × 3 plates are used. Roll them round a large bottle or jar to make them form circle, lapping two holes each end. Screw on outside fittings to boiler before fixing back plate; screw piece of wood on to bracket at front of boiler to slip funnel on.

Roller and wheels are covered with cardboard.

To make funnel to shape screw a piece of round wood underneath wheel at top.

The model is 11½ in. high, 17½ in. long, 8 in. wide.


WOOD STATION HOUSE WITH METAL ROOF No. 302.

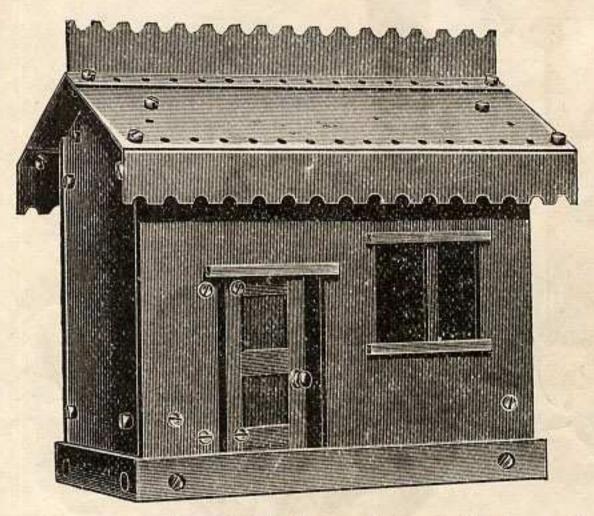


The drawing clearly shows the way the house is fitted up. The glass for windows is pushed in the grooves before the front and back are screwed to the angle bars.

Fit up the base frame and ends first.

2	House, front rails	;				No.	12
2	,, side rails	2.40				11	13
2	,, sides	2.02	20.00				14
4	Window sills	200	44.		15000	7.1	15A
1	House, back		= 0000	111	23.2	1,	15в
1	,, front	2.2	N	444	2.10	,,	15F
2	Sash bars					-,,	15D
2	Doors	****				.,	16
2	Lintels		***			11	16A
2	Window glass	* in 40.	1000		-		26
48	Screws					11	50
4	Angle bars, 6 in.			+ +		**	52
4	Brackets	-		464	400	11	66
2	Plates, 8 × 3 in.	100		4.5	100	,,	67
1	Ridge, 8 in.	. 40		4.4	27.27	11	70
2	Eaves, 8 in.		100	474	4747	,,	71
4	Hinges		-16760	W/E	2/2	.,	72
2	Knob screws				2100	.,	92
2	Turn buttons	• •	201010			**	93

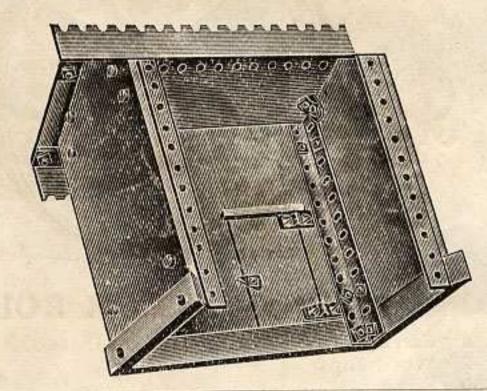

STATION AND STATION HOUSE. No. 306.

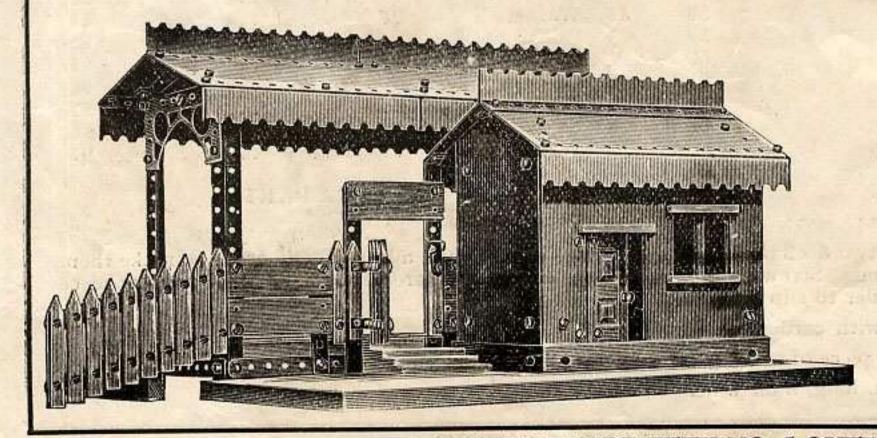


The parts for this handsome model are given on page 31, and only large wood base board is added to the model to make it a complete station.

Signal Posts, Lamps and High Level Bridge can be added as desired.

With the No. 5 Outfit, the Carriage, Goods Truck, Side Station, Station House, and High Level Bridge with Covered Gallery can be made up complete at the same time, as well as many other smaller models.

MUS ENGINEER BRITISH MADE

BEAM ENGINE

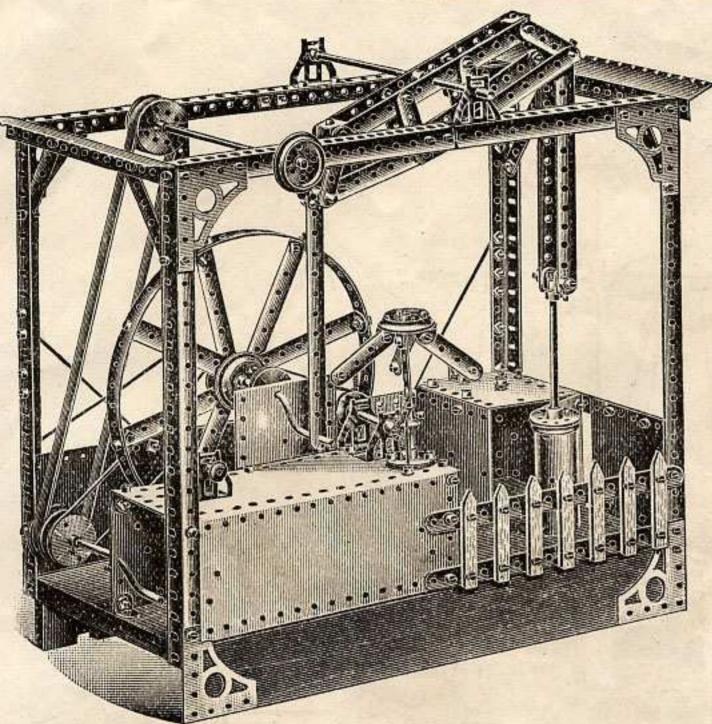

		No.	No. 357. No.
7	Posts	11	2 Eaves, 8 in. 71
	Baseboard	19	4 Trunnions 74
	Platforms	24	8 Wheels 75
	Screws	50	4 ,, 76
	Angle bars:	1259331	1 Axle, 3½ in. 77
II.	6 in	52	1 ,, 1½ ,, 79
4	,, 8 ,,	54	13 Collars 82
2	,, 12 ,,	55	1 Handle 83
14	Strips, 2 in.	56	44 Washers 84
5	21	57	2 Buffers 85
3	2	58	2 Lamps 87
11	21	59	4 Connecting
3	5 1	61	rods 96
3	61	62	8 Wood screws 97
2	0	63	Extra parts—
3	121	64	2 Axle rods, 1½" 79
6	Architraves	65	1 Handle axle v 83
30	Brackets	66	1 Wheel 158
	Plates, 8 × 3"	67	2 Bevel gears 162
9	2 2//	68	2 8 in. Axles 166
9	" 3×3	00	2 om maco 100

To make wheel join two 12½-in. strips and leave five holes between each spoke. Fit governors, etc., to 8×3 in. plate before fixing plate on.

WATERWHEEL DREDGER AND PILE DRIVER No. 358.


		No.	N	lo.
16	Posts	11	61 Brackets	66
1	Baseboard	19	5 Plates, 8 × 3 in.	67
	Plain platforms	23	6 ,, 3×3 ,,	68
	Fitted	24	2 Trunnions	74
	Slips	25	6 Wheels	75
	Screws	50	4 ,,	76
	Angle bars, 6 in.	52	2 Axles, 3½ in.	77
3		53	$1 , 1\frac{1}{2} , \dots$	79
2	,, ,, 12 ,,	55	7 Collars	82
	Strips, 2 in.	56	1 Handle Axle	83
8	$\frac{1}{1}$ $2\frac{1}{2}$	57	13 Washers	84
4	3	58	2 Buffers	85
9	21	59	2 Screws and nuts	91
3	$\frac{1}{1}$, $\frac{3}{2}$, $\frac{1}{2}$	60	2 Knobs	92
4	$,, 5\frac{1}{2},, \ldots$	61	4 Signal Post rods	96
4		62	15 Wood screws	97
4	,, 8 ,,	63	Extra parts-	
2	$12\frac{1}{2}$	64	3 Wood screws	97
4	Architraves	65		


Base should be built first, and then wheels for bottom of band should be fitted in. Four 3½ strips, three 8 in strips and one 2 in. strip are used to construct wheel.

Pieces of card can be made into shape for buckets.

This model can be run by power by adding extra pulley wheel

to big wheel axle.

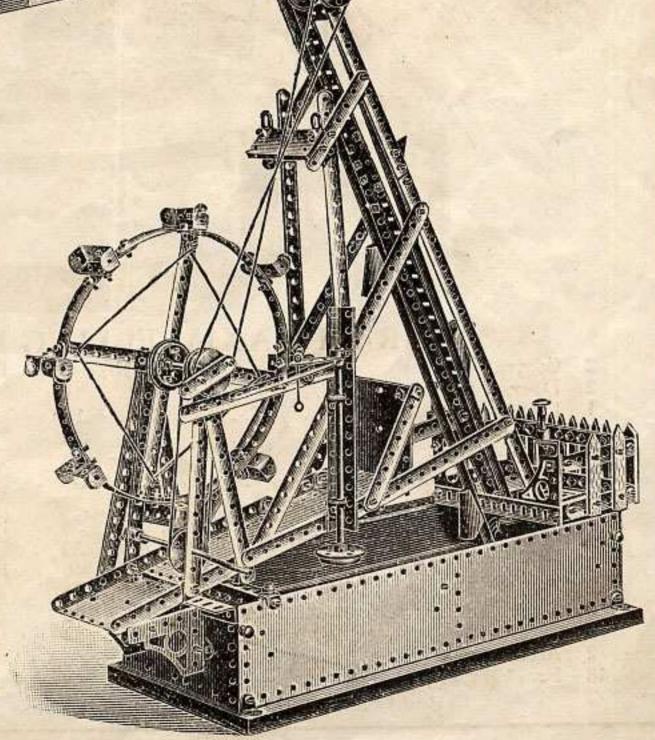


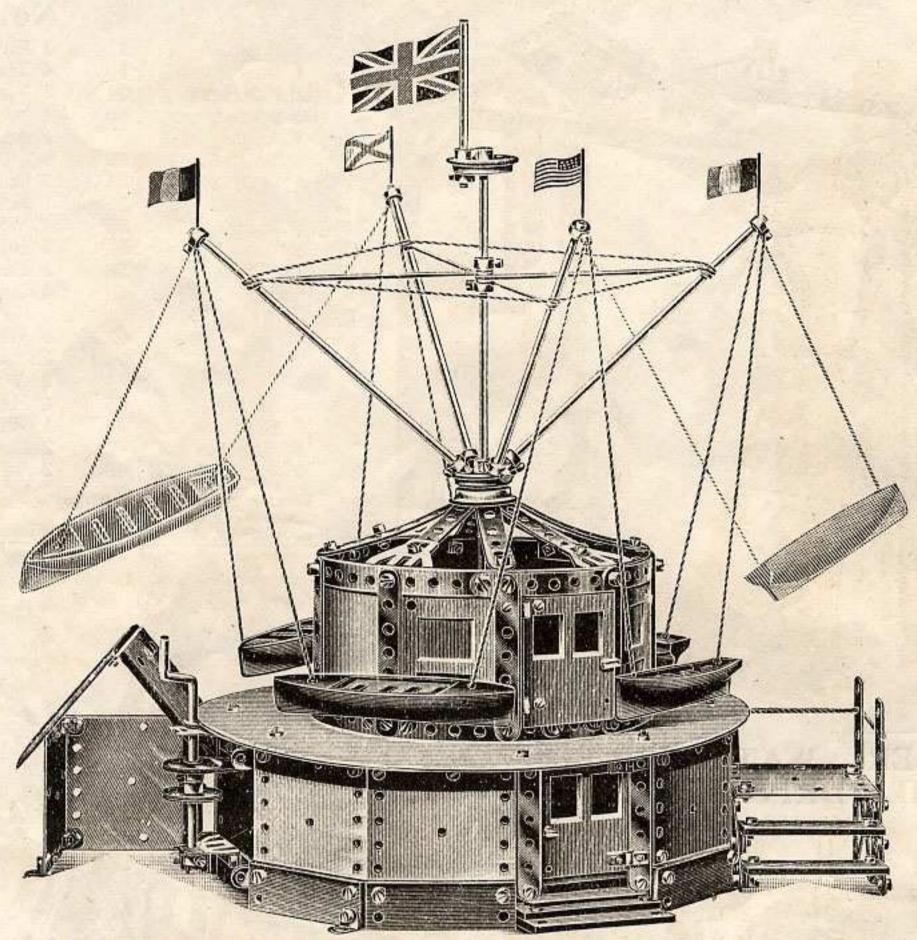

HIRAM MAXIM FLYING BOATS, No. 363.

2	Central windows	100			No.	8	14	Plates, 3 in. × 3 in.				No.	68
2	Doors of house			(1414)	100	16	2	Straight hinges	1.00%		8.800	,,	72
1	Lintel for house				,	16A	2	Bent hinges	100		10.00	,,	73
14	Wood slips	***		2. W.	,,	25	6	Trunnions	197			,,,	74
100	Screws					50	4 -	Flanged wheels			30/4	"	75
1	Strips, 2 in	44		7.	22	56	- 4	Grooved wheels			100	**	76
9	", $\frac{21}{2}$ ",				2.5	57	1	Axle, $3\frac{1}{2}$ in				11	77
3	,, 3 ,,	• •		0.000	22%	58	13	Collars	***			"	82
14	$3\frac{1}{2}$,,		* *	1000	110	59	1	Handle			1*0*	**	83
3	" 4 "	**			20.	60	16	Washers				"	84
2	$,, 5\frac{1}{2},, \ldots$	**	2.1	1999	39	61	2	Door handles	**		(*)	,,	88
3	,, 8 ,,	187.9	*.*		9.7	63	2	,, screws				2.2	91
2	$12\frac{1}{2}$, Architraves			0(*)(*)	n	64	4	Rods		***		,,	96
48	Brackets	••		(4)(4)	11	(5		Addition		S.		-	
40	CHARLES TO SECURE				**	66	6	Axles, 8 in		• •		,, 1	100
	Build	pase first :	card d	isc for	top	of ba	ase: u	se four wood boats	to make	swings.			

PRIMUS ENGINEERING

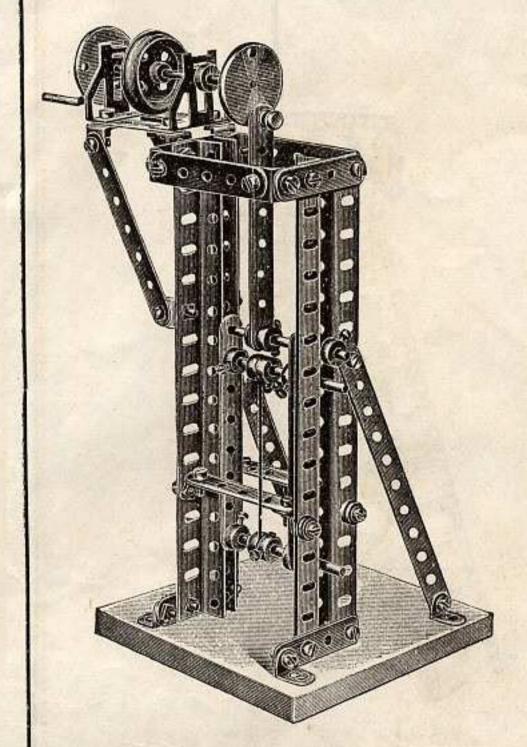


VERTICAL SAW No. 304.

37	Screws		100					No. 50
4	Angle bars, 8 in.							,, 54
6	Strips, 2 in.				He was			,, 56
	0.1				19			E77
2	", $3\frac{1}{2}$ ",							,, 59
4 2 3 2	., 4 ,,		**			- 4		,, 60
2	$5\frac{1}{2}$	100						., 61
18	Brackets							66
	200	• •		• •		* *		OF THE STATE OF TH
2	Trunnions							,, 74
1	Wheel							,, 75
2 3	Wheels							,, 76
2		Shirt Co.	3.5	70.70	5.413.0	1525	1000	1,000
	Axles, $3\frac{1}{2}$ in.	****	* *					,, 77
13	Collars	***						,, 82
1	Handle							,, 83
1	Washer							0.4
10		(*)(*)	• •		1.00			10000
4	Wood screws	* *	1.4		70.0			,, 97

The crank arm is fitted to the grooved wheel by means of knob screw with washers and double nutted.

The frame to carry saw is composed of two 4-in. strips with three $3\frac{1}{2}$ in. axle rods and held together by collars. Two of the collars are placed OUTSIDE the angle bars on the upper rod, to make it slide easily in the grooves.

A fretsaw can be placed between the collars to complete the model.

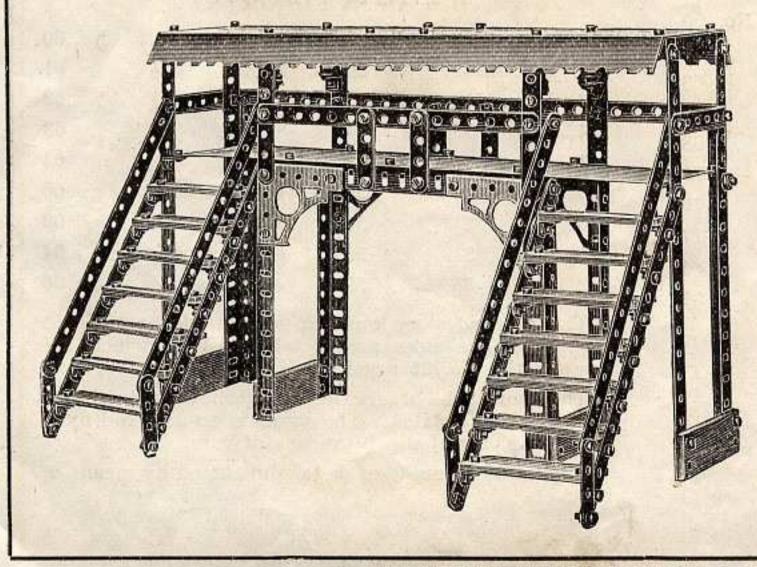


COVERED BRIDGE

No. 305.

18	Slips			No.	25
144	Screws			"	50
4	Angle bars, 8 in.			"	54
8	Strips, 2 in.	3.00		,,	56
4	,, 3 ,,			"	58
4	$3\frac{1}{2}$,,			,,	59
4	Angle bars, $6\frac{1}{2}$ in.			,,	62
11	Strips, 8 in		454	,,	63
4	Architraves			,,	65
46	Brackets			,,	66
4	Plates, 8 × 3 in.			,,	67
4	Eaves, 8 in.			,,	71
6	Washers			,,	84
4	Lamps			"	87

This model can be raised on piers to suit height of platforms, and can be made wider for double rails by the use of 12-in. angle bars and other parts to correspond.

PRIMUS ENGINEERING

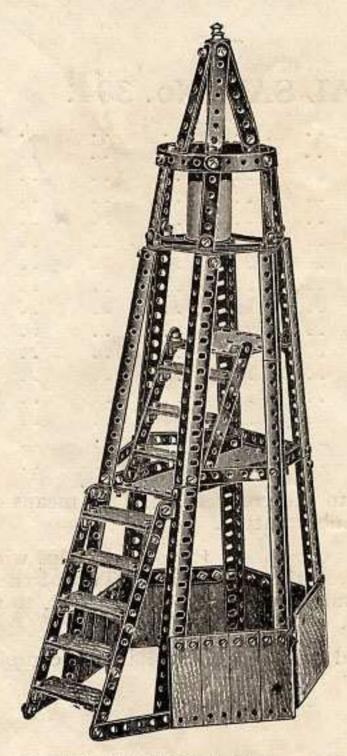


LIGHTHOUSE No. 312.

1	End No.	3	1	Strip, 4 in.	No.	60
25	Slips, 3 × 1 in. ,,	25	3	Strips, 5½ in.	,,	61
150	Screws ,,	50	2	,, 8 ,,		63
4	Bars, 6 in. ,,	52	45	Brackets	**	66
8	,, 8 ,, ,,	54	3	Plates, 3×3	**	68
2	,, 12 ,, ,,	55	2	Wheels	**	75
2	Strips, 2 in. ,,	56	1	Wheel	- 27	76
14	$,, 2\frac{1}{2},,$	57	1	Axle, $3\frac{1}{2}$ in	. ,,	77
7	,, 3 ,, ,,	58	16	Washers		84
13	$3\frac{1}{2}$,, ,,	59	1	Lamp	-	87

The skeleton is made on angle bars screwed tegether and secured by metal strips, which are slightly bent. The platforms are made of 3 × 3 in. plates.

To form the lantern, slightly curve six 2½-in. strips. The beacon light is made by rolling pink paper round two flanged wheels, one being placed at the top and the other near the bottom of a 2¾-in. axle, which passes through a 4-in. metal strip placed across the base of the lantern as shown, and is secured in position by a pulley wheel.

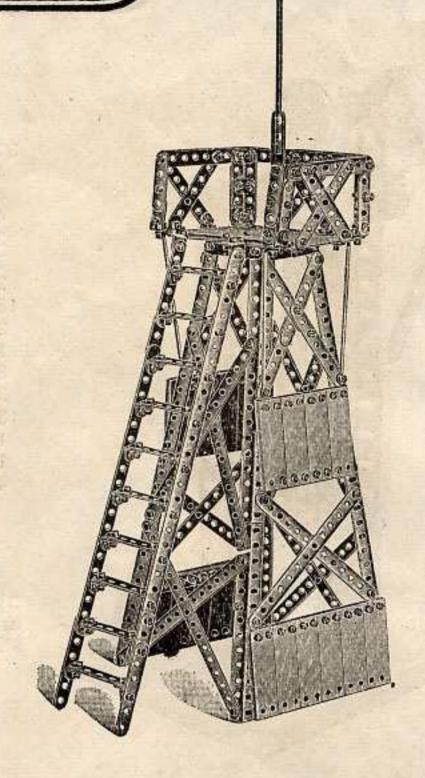


PYLON No. 313.

100 00 00	resummer to the	- MATERIA	L			12000 20000	luc.	4000			
20	Slips, 3	\times 1 in.	No.	25	4	Strips,	4	in.	No.	60	
190	Screws		,,	50	2	* 11	51	,,	"	61	
2	Bars, 6	$\frac{1}{2}$ in.	,,	53	4	211	61	,,	**	62	
4	200	8 ,,	11	54	8	300	8	,,	***	63	
2	- ,, 1	2 ,,	"	55	2		12	***	**	64	
16	Strips,	2 in.	***	56	44	Bracke	ts.	4	,,	66	
16	.,	21 ,,	,,,	57	4	Plates			**	68	
5	,,	3 ,,	11	58	6	Washe	rs	-6	,,	84	
-12	.,,	$3\frac{1}{2}$,,	,,	59	4	Signal	rod	s	**	96	

The four sides are built up with angle bars joined together. The sides are metal strips on which are screwed the No. 25 wood slips.

The floor of the observation platform consists of four 3×3 in. metal plates. The signal is an axle rod fixed to a $3\frac{1}{2}$ in. metal slip by means of wire.


The ladder is made of metal slips fitted by means of brackets.

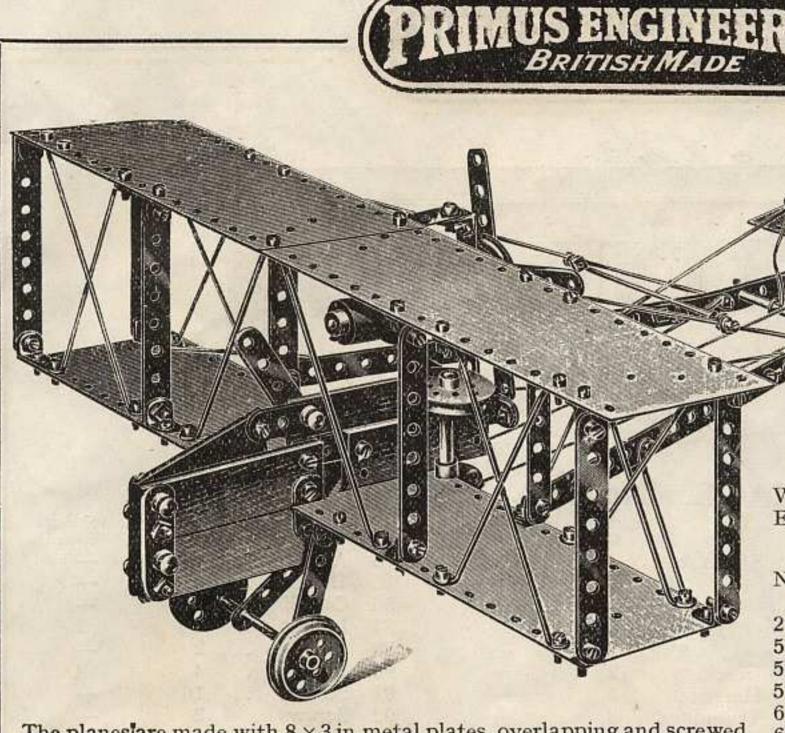

The planes are made with 8 × 3 in. metal plates, overlapping and screwed together. Signal post rods are used for the stays and as connecting rods for steering. Cord is used as illustration for operating the rudder.


HOUSE BOAT No. 308.

4 - Rails		No.	1	7	Slips		No.	25	
2 Windows		,,	5	111	Screws			50	
2		.,	6	2	Angle bars	, 61 in	n. ,.	53	
2 Doors	(80785)	- ,,	7	9	Strips, 2			56	
2 Windows			8	3	,, 21/2		.,,	57	
1 Roof			10	1	3	(4.5)		58	




WITH CONTROL LEVERS OPERATING ELEVATING PLANES AND RUDDER.

			With	Addi-
No.		37	No. 5	tional
		37.3	Outfit.	Parts.
25	Wood slips, 3×1 in.		6	_
50	Screws		112	
56	Metal strips, 2 in.	*****	16	1
57	$\frac{1}{1}$ $2\frac{1}{2}$,,		4	-
60	,, 4 ,,		3	7
64	,, 12½ ,,		2	
66	Brackets		34	_
67	Metal plates, 8 × 3 in.		4	_
68	" 3×3 "		3	
75	Flanged wheels		4	
76	Grooved wheels		3	_
77	Axle rods, 3½ in.	253150	4	
78	,, 23 ,,		2	-
82	Collars		13	
84	Washers		20	
92	Knob screws		4	1
96	Signal post rods	77	4	18
7100000	The Control of the Co	All the said	20,000	

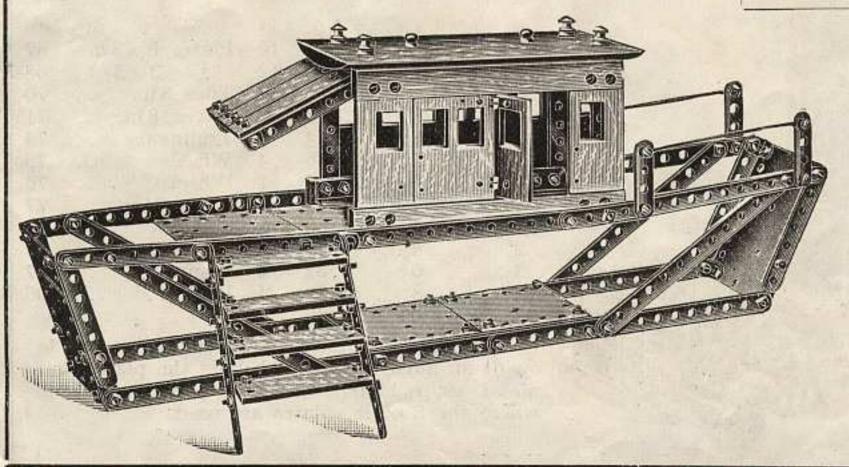


10	Strips, 3½	in.			No.	59
2 5 4 5 3	,, 4	,,			**	60
5	$5\frac{1}{2}$	11			,,,	61
4	$,, 6\frac{1}{2}$,,				62
5	,, 8	15			"	63
3	$12\frac{1}{2}$	11			,,	64
36	Brackets			-	11	66
2	Plates				,,	67
8	**			· 6	105	68
4	Hinges			100 NF		73
4	Lamps				PART.	87
4	Screws	114				92
2	Rods		1000	1156	31	96
5-37			anten.	-50.5	13.	300

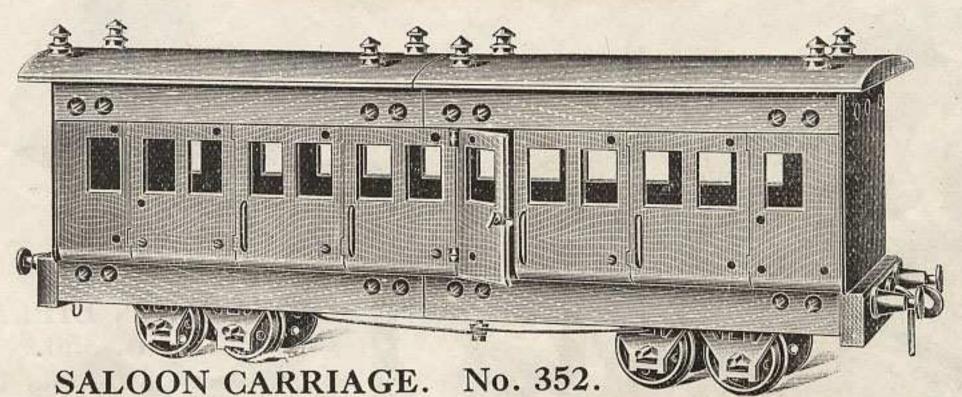

	7,475,LH; 731, F111, F11							
No.	Parts in No. 5 Outfit.	Additional Parts.	No.	Parts in No. 5 Outfit.	Additional Parts.	No.	Parts in No. 5 Outfit.	Additional Parts.
1	Side rails 6	2	56	Strips, 2 in. 3	-	78 Axles, 23	in. 4	-
3	C. ends 2	-	57	., 2½ ,, 8	E - 10	85 Buffers	4	_
4	Buffer blocks 2	E. II	58	,, 3 ,, 1	-	86 Couplings	2	-
5	R.H. windows 2	DESCRIPTION OF	59	$3\frac{1}{2}$, 10	1 -	87 Lamps	6	2
6	L.H. ,, 2	No.	63	,, 8 ,, 2	_	88 Handles	2	
7	Carriage doors2		66	Brackets 12	11-11	90 Rails	4	4
8	" windows 2	8	73	Hinges 4	222	91 Screws	16	-
10	Roof 1	1	74	Trunnions 8		92 Screws	2	-
50	Screws 57		75	Wheels 8	FE CHILD	96 Rods	. 4	# - <u>211</u>
53	Angle bars, 61" 4		76	Wheels 2	197			


The metal framework of saloon should be made first; join two $6\frac{1}{2}$ -in. angle bars with a $2\frac{1}{2}$ -in. metal strip, leaving only the central hole between them. This applies to both sides. The top is supported with three 4-in. slips each side, and the top sides are made by joining one $8\frac{1}{2}$ -in. and one $6\frac{1}{2}$ -in. metal slips. Then fix wood as illustration. Bogie wheels, see page 47.

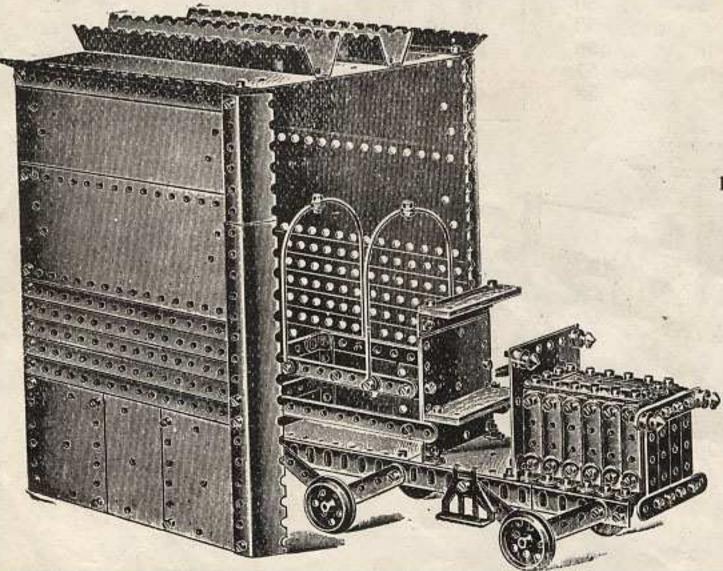

MOTOR CAR AND GARAGE. No. 311

			No.			m	No.
2	Slips,	3×1 in		10	Plates, 8 × 3	in.	67
174	Screw	rs	50	12	3×3		68
6	Angle l	bars,		2	Tiles, 8 in.		70
		$6\frac{1}{2}$ in.	53	8	Eaves, 8 in.		71
2	,, ,,	8 ,,	54	2	Trunnions		74
14	Strips,	2 in.	56	4	Wheels		75
16	,,	21 ,,	57	1	Wheel		76
8		3 ,,	58	3	Axles, $3\frac{1}{2}$ in		77
2 2 3	.,	4 ,,	60	2	Collars		82
2	.,	$5\frac{1}{2}$,,	61	10	Washers		84
3	,,	$6\frac{1}{2}$,,	62	4	Lamps		87
2 12	- 11	8 ,,	63	4	Rods		96
50	Brack	tets	66			1000	

The lower portion of the garage is made on 6½-in. angle bars, which hold the plates and metal strips. Higher, brackets are sufficient where the 8 × 3-in. plates are used.

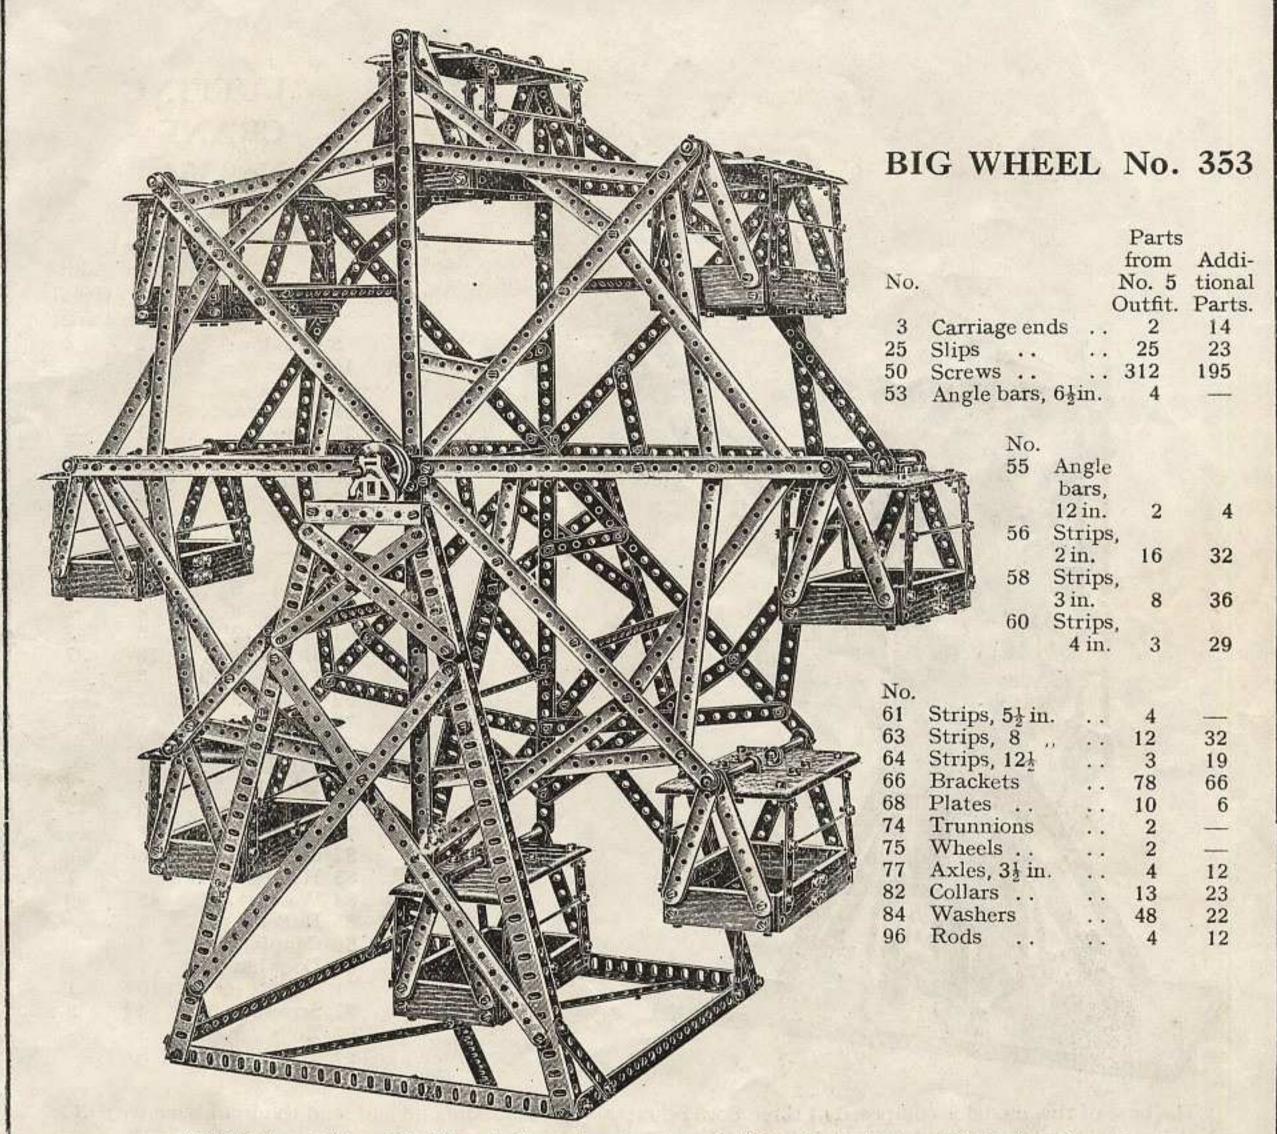


SPECIAL. 1 Special 12-in. Axle rod, price 1s. 1 8-in. Angle bar cut in half, price 3d.

MEASUREMENTS.

	Height			28½ in.	Diameter of wheel	 4.4	 23	in.
1232	Width			25 ,,	Depth of wheel	 	 81/2	**

The stand should be built and then the framework of the wheel.

The roofs of the carriages are made with two carriage ends, placed lengthways, and are joined together with 2-in. metal strips. Two extra holes require to be made in each, for brackets to be fixed to for sides to hang from. The model otherwise is straightforward.

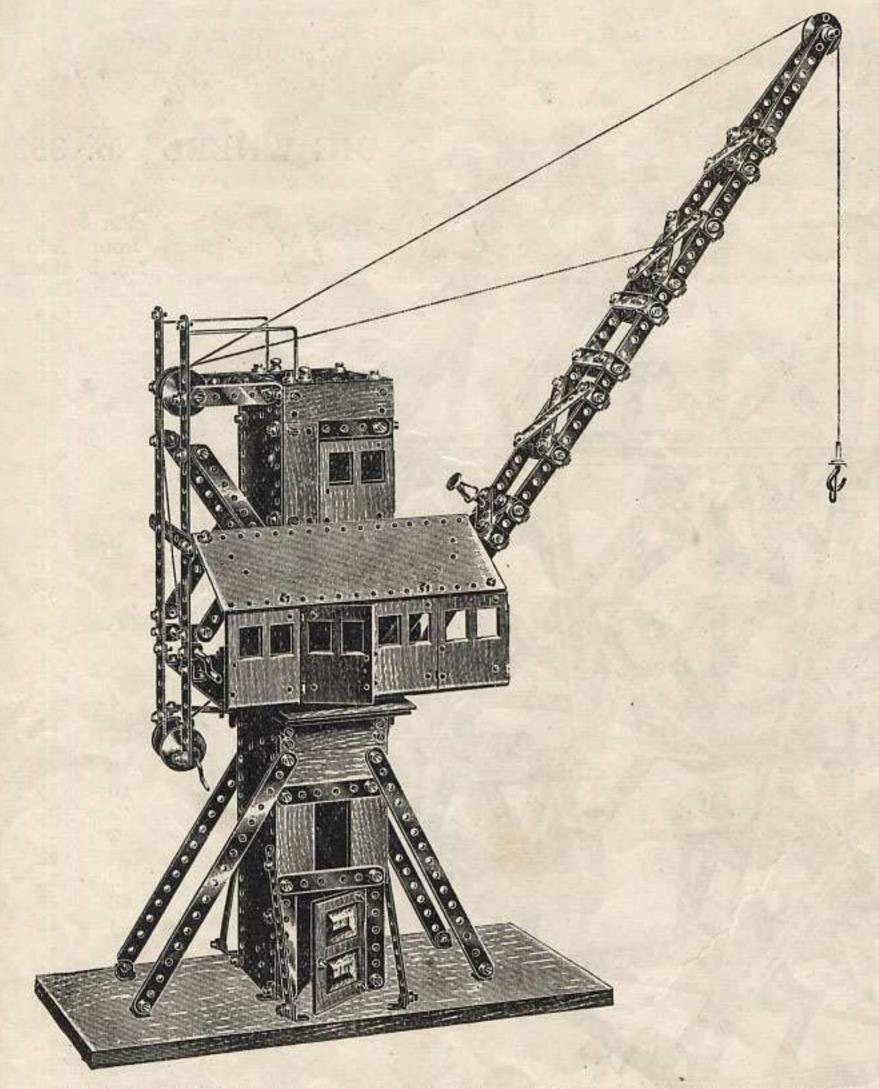

CRANE No. 354.

		Danie	
		Parts	
			Addi-
	N	lo. 5	tional
No		outfit.	Parts.
8	Windows	2	4
16	Door	1	-
18	Truck ends	1	-
19	Baseboard	1	-
25	Slips	11	-
	Screws	202	-
	Strips, 2 in.	14	
57	$\frac{1}{1}$, $\frac{2^{1}}{2}$,	4	9 95 16
58	$\frac{1}{1}$, $\frac{2\frac{1}{2}}{3}$, $\frac{1}{1}$	8	3
59	$,, 3\frac{1}{2},$	6	
60	,, 4 ,,	3	
61	$5\frac{1}{2}$,	4	4
63	,, 8 ,,	4	-
64	,, 12½ ,,	3	3
66	Brackets	78	37
67	Plates, 8 × 3 in	1. 6	-
68	,, 3×3 ir	1. 5	-
72		2	-
	Bent hinges	2	
75	Wheel	1	100
76	Wheels	4	3
77	Axle, $3\frac{1}{2}$ in.	2	-
79	,, 1½ ,, ,	, 1	(Control
82	Collars	8	-
83	Handle	1	1
84	Washers	48	90
	Buffers	1	-
86	Coupling	1	-
88	Door handle	1	
91	,, screws	16	1
92	Screws	4	3
96	Rods	3	3
97	Wood screws	8	

The base of this model is composed of three 8×3 in. metal plates standing on end, and the front part with 3-in. and $3\frac{1}{2}$ -in. metal strips and 3×1 -in. wood slips, and is supported by means of four $8\frac{1}{2}$ -in. metal slips at each corner, joined to brackets, screwed to the baseboard. The roof of base is a 3×3 -in. plate. The floor of engine house is two 8×3 -in. plates screwed together, and is joined to the lower part by means of a $3\frac{1}{2}$ -in. axle rod, using pulley and flanged wheels, as in earlier models. The balance is kept by using four knob screws inserted in 3×3 -in. plate at similar height to one flanged and one pulley wheel. The front and back of engine house are made with 8×3 -in. plates, the lower parts of sides with 3×3 -in. plates, and the upper part with carriage windows and 3×1 -in. wood slip; the remainder is easily gleaned from illustration.

PRIMUS ENGINEERING

BIGWHELL OUTFITEAR



000

A series of new and ingenious parts with which "Primus Engineers" can build up wheels of 4, 6 and 8 in. diameter to be used in connection with many of the models in the Primus Manual or for other special models.

The Wheels are built up in sections. Three sizes can be made, suitable for Fly-Wheels, Pulley-Wheels, and Paddle-Wheels, also Wheels for Carts, Carriages, Traction Engines, Wagons, Gun-Carriage, in fact wheels for all things and all purposes, and Composite Wheels for Steam Rollers.

These parts are used with the regular Primus parts, making the Primus Outfits more varied, amusing and instructive than any other constructional toy.

The sectional parts can be used for forming the curved parts of Roundabouts, Lighthouses, Towers, Arches in Bridges, etc.


The Patent Wheel sections themselves are strikingly novel, and as they may be easily bent to any curve or made quite straight, it will be at once evident how useful they become in making up new models. The Spokes, which are of three different sizes, may also be used as Stays, Supports, Levers, etc., and besides making the models look more like the real thing, they offer a pleasing alternative to the use of perforated strips.

Many new uses will soon be found for the Hubs, either singly or in combination.


PRICE, complete - 15/0.

Instruction Booklet supplied with each Outfit.


Models made with PRIMUS BIG-WHEEL & Nº 1 standard outfit

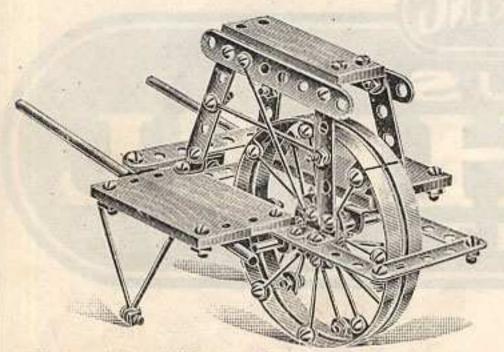


No. 1004. Chinese Luggage Barrow.

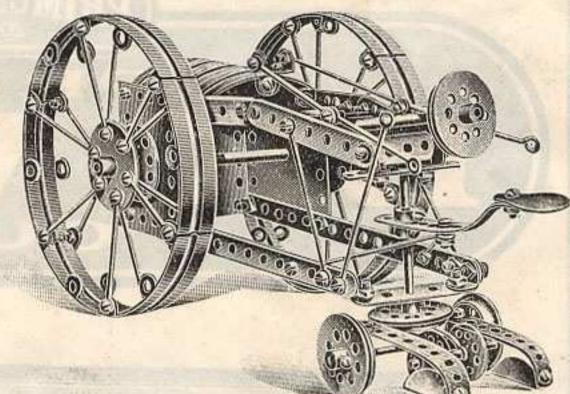


No. 1001. Tractor Plough.

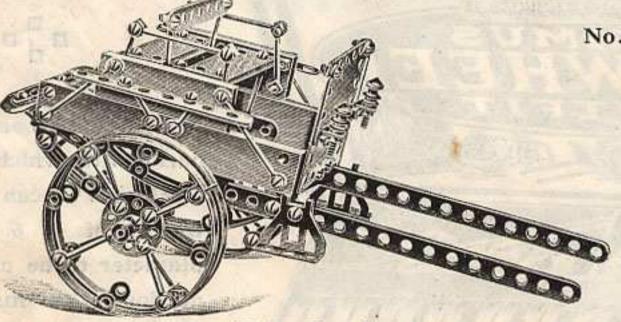


No. 1000. Dog Cart.

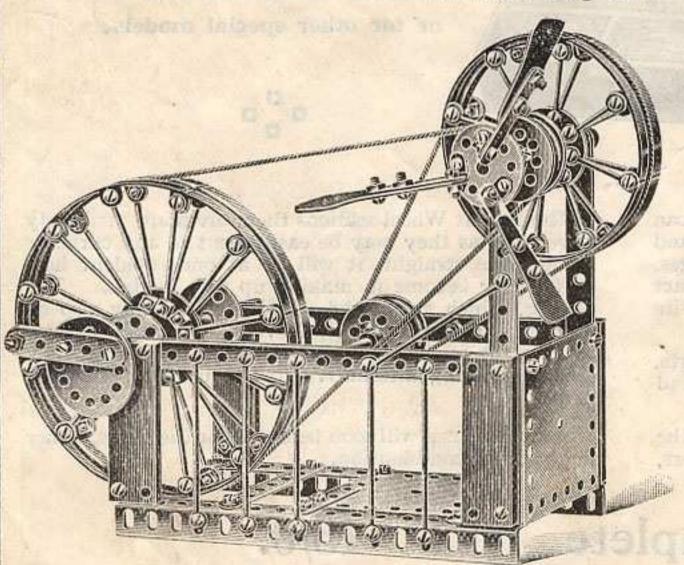


No. 1003. Power Driving Wheel and Fan.

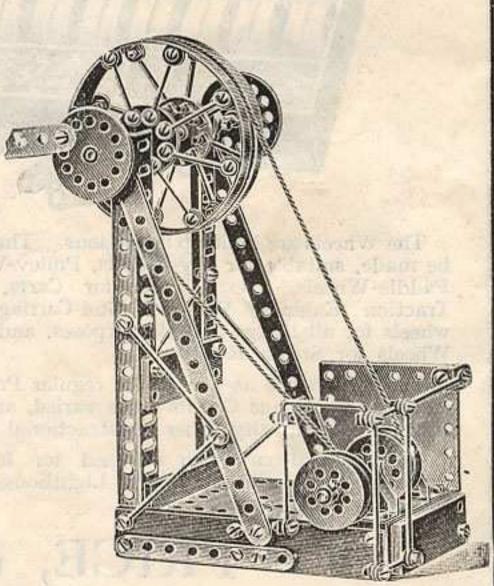


No. 1005. Power Wheel and Counter Shafting.

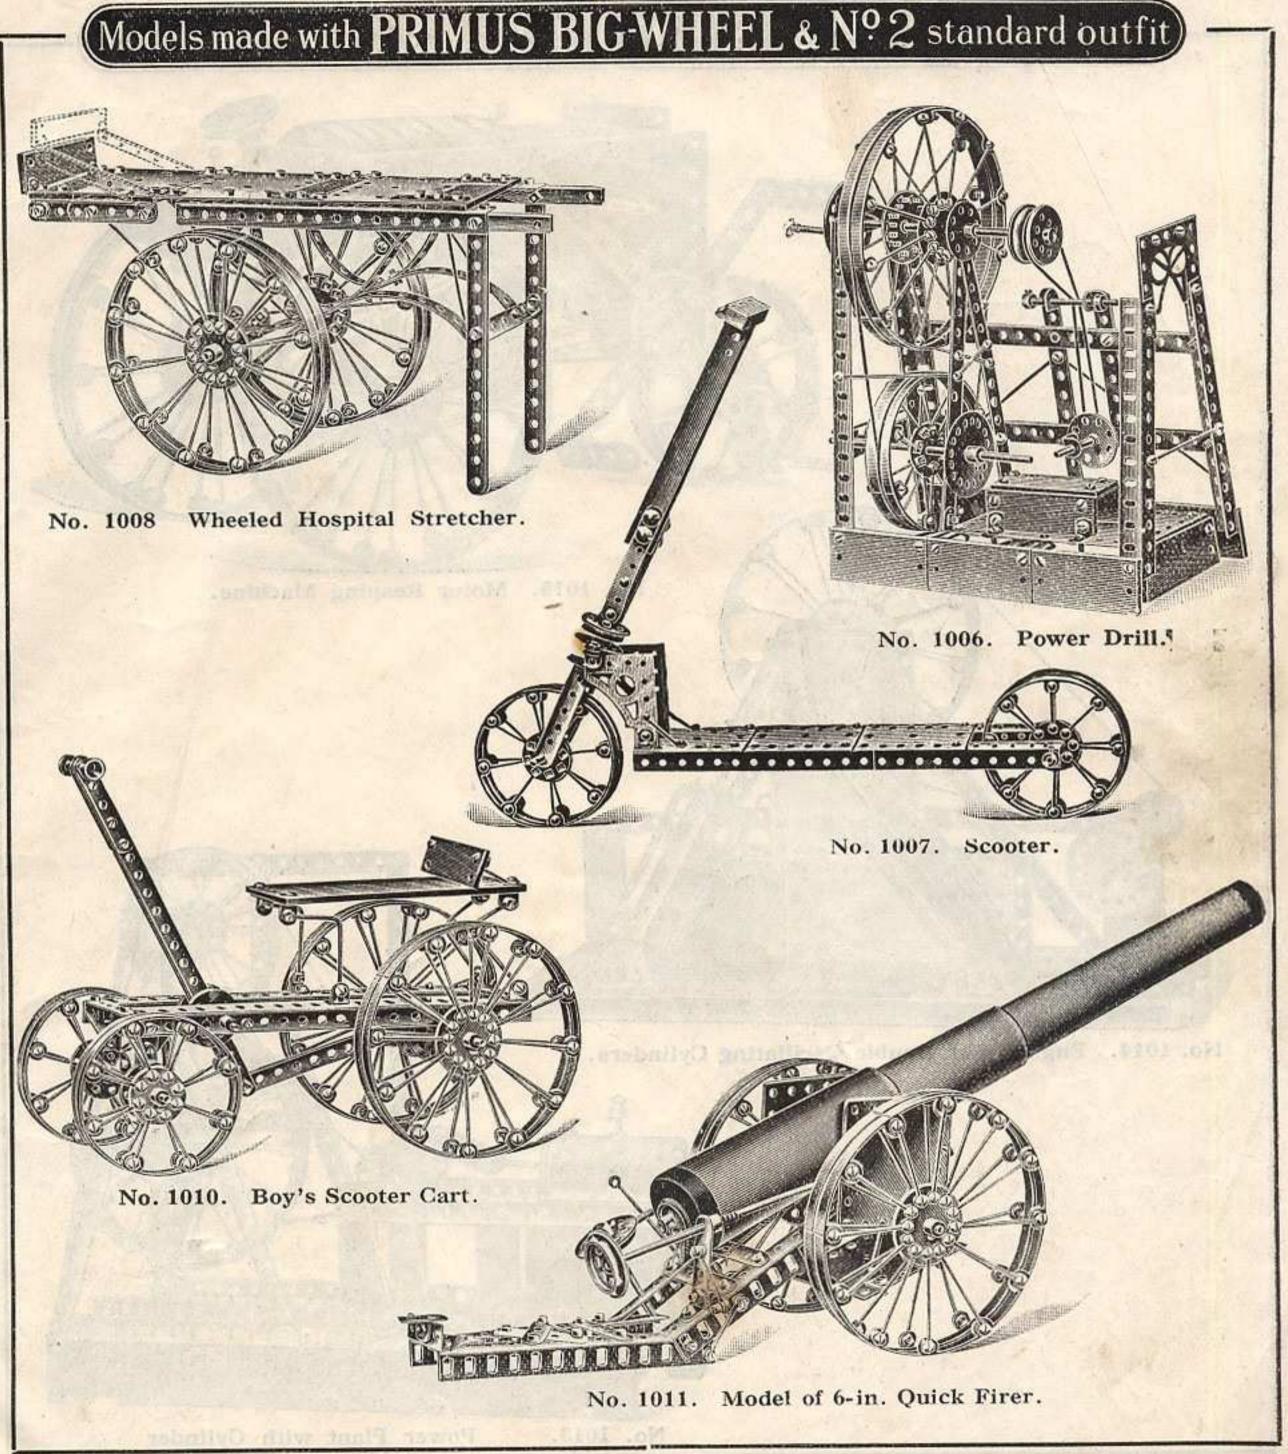

Models made with PRIMUS BIG-WHEEL & Nº 3 standard outfit

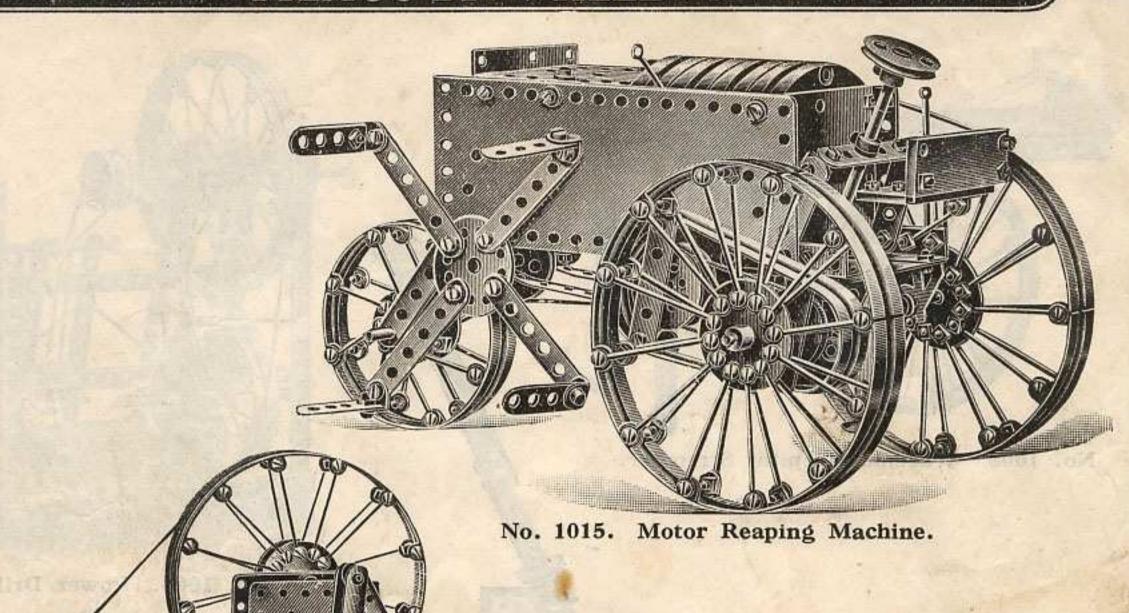


No. 1014. Engine with Double Oscillating Cylinders.

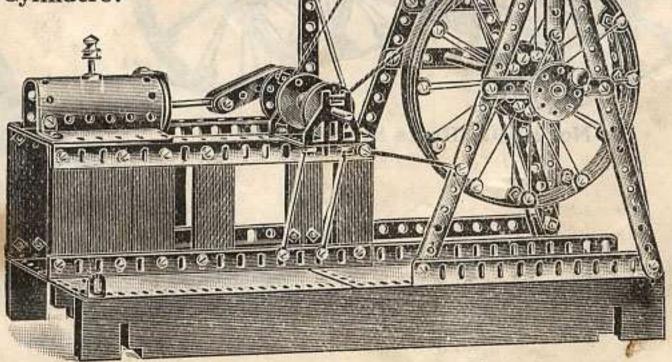


No. 1013.

Power Plant with Cylinder


Models made with PRIMUS BIG-WHEEL & Nº4 standard outfit

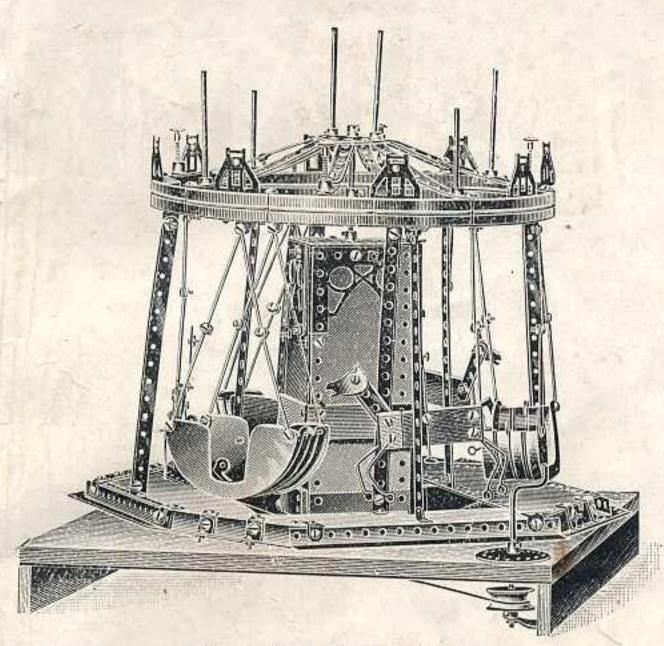


No. 1019. Roundabout.

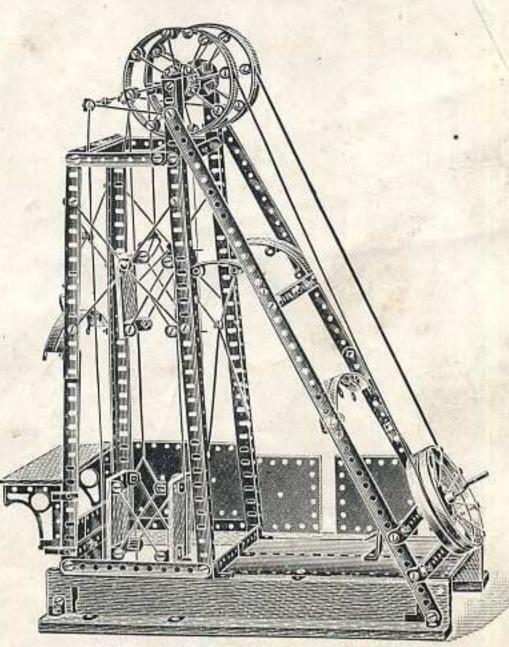

No. 1017. Pit Head Gear.

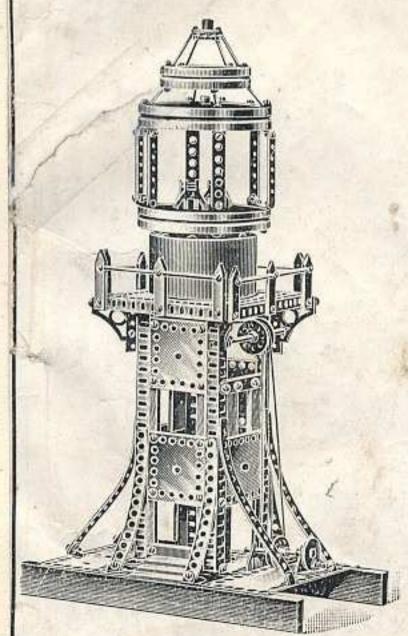


No. 1018. Lighthouse.

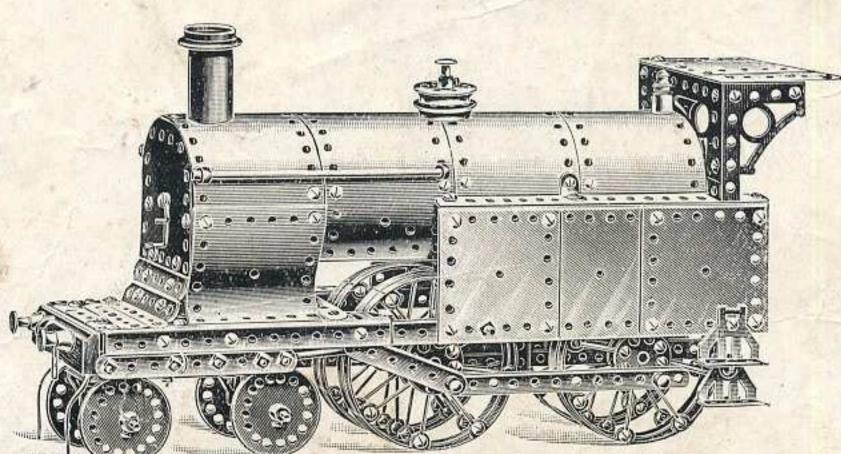


No. 1020. Midland Locomotive 4-4-0 Type.

CONSTRUCTED WITH PRIMUS ENGINEERING

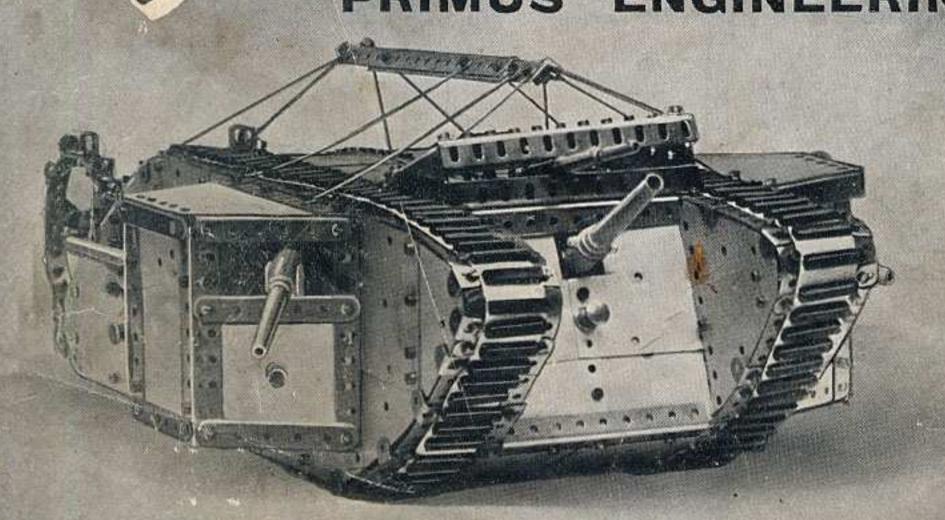

CAN BE MADE WITH No. 5 OUTFIT AND EXTRA PARTS

PRIMUS TANK. FRONT VIEW.

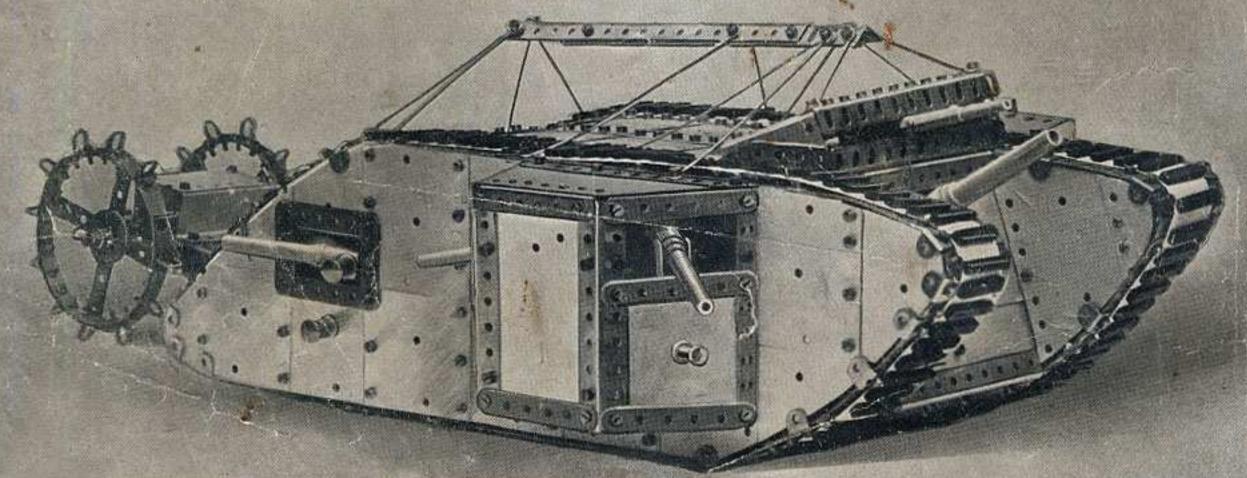

PRIMUS TANK. SIDE VIEW.